



NEW: OME

MAGNETIC SELF-CLOSING HINGED COLD ROOM DOOR

- ✓ EASY TO USE
- ✓ PRE-ASSEMBLED AND REVERSIBLE
- ✓ FLEXIBLE: COUNTLESS OPTIONS

isomasters

OPTIONS

Version	Type	Hinges	Fittings
Standard version	Magnetic rubber seal on all four sides	Spring hinge	Stainless steel handle
Built-in version	Magnetic rubber seal on all four sides	Spring hinge	None, only internal reinforcement for towing door track*
Minibox version	Magnetic rubber seal on all four sides	Spring hinge	Stainless steel handle + internal reinforcement for towing door track*

* Towing door track itself not included

ADVANTAGES

ALL THE ADVANTAGES OF A CONVENTIONAL HINGED COLD ROOM DOOR

- **Flexible:** 1 door, countless options!
 - 7 different **sizes**
 - 3 different **versions**
 - For both **cooling and freezing** application
 - Possible with both **Modular** and **Minibox** cold rooms


EXTRA ADVANTAGES SPECIFIC TO THIS MAGNETIC HINGED COLD ROOM DOOR

- Spring hinge and magnetic rubber
 - Self-closing
 - Better alternative for door pumps: more elegant and practical
 - Ideally suited for **private** requests!
- Seal on all four sides
 - Always reversible
 - Very **easy to mount:** you choose the door swing direction at the time of mounting!

PROPERTIES

Sizes	<p>Modular</p> <ul style="list-style-type: none"> • Clear widths: 700 - 800 - 900 - 1000 - 1100 - 1200 - 1300 mm • Clear height: 2000 mm <p>Minibox: 700 x 1940mmH (clear opening)</p>
Door leaf	<ul style="list-style-type: none"> • 80mm polyurethane foam (PUR) (CFC-free) • Single door leaf • Galvanised pre-coated steel sheet with CLEANsafe coating 25µm in RAL 9010 colour • Reversible • Fitted with single magnetic black rubber seal
Door frame	<ul style="list-style-type: none"> • Galvanized M-frame 95 x 15 mm with powder coating 80µ - RAL 9010 • Please note: not possible in combination with a lowered floor • Outside finish: foam-finished frame (inclusive)
Lambda value	$\lambda = 0.0223 \text{ W/m.K}$
Reaction to fire	B-s3, d0 in accordance with EN 13501-1



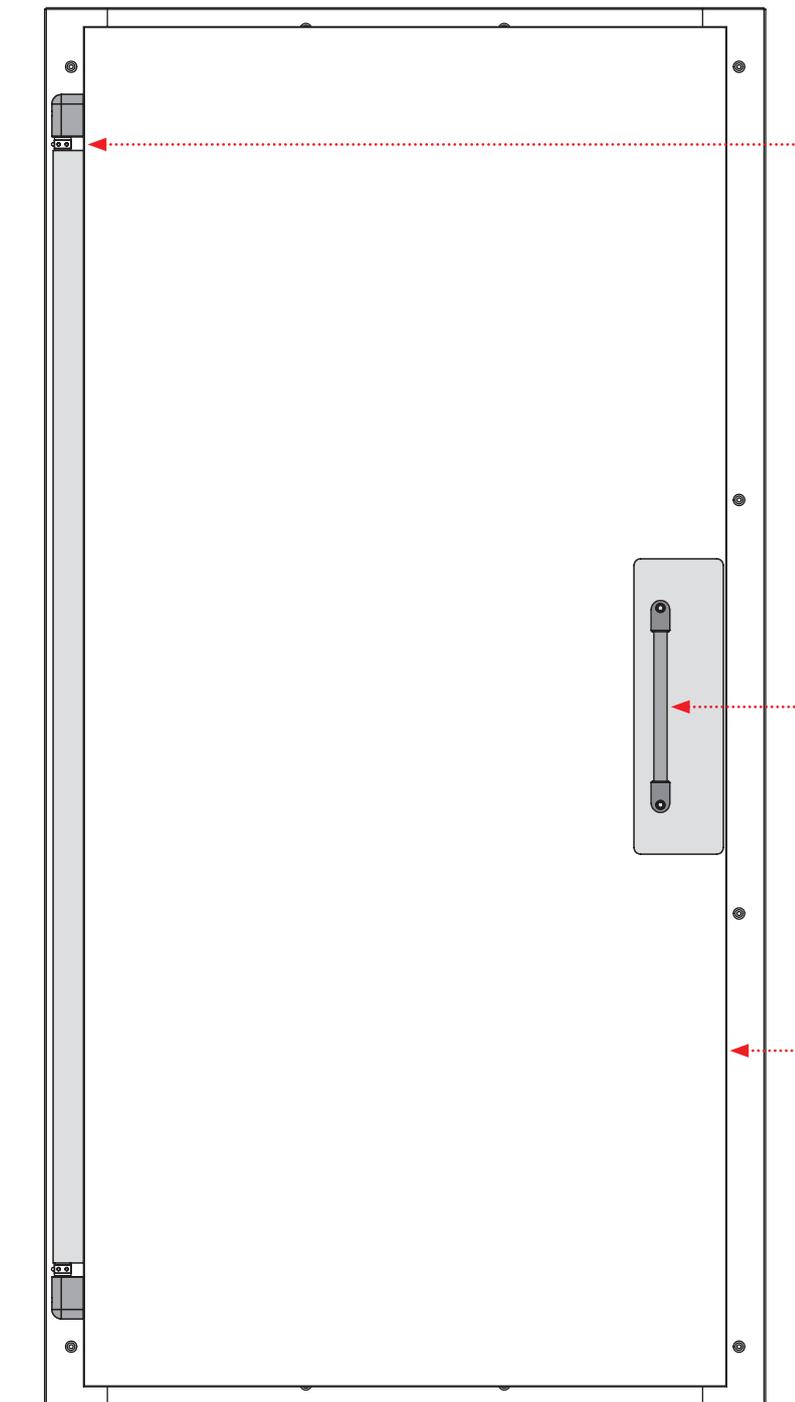

SPRING HINGE
with protective cap



Standard:
STAINLESS STEEL HANDLE
with stainless steel protective plate
on the inside and outside



*Built-in version: no handle,
reinforcement for towing door track only**

MAGNETIC RUBBER SEAL
on all four sides



DOCUMENTS


You can view the technical sheet by clicking the link in your quotation. The assembly instructions are enclosed in the packaging and can also be requested via info@isomasters.com.



isomasters nv

Pontstraat 80 • Waregem zone 11B • B-8791 Beveren-Leie
T +32 (0)56 71 04 94 • F +32 (0)56 70 32 87
info@isomasters.com • www.isomasters.com

webshop.isomasters.com

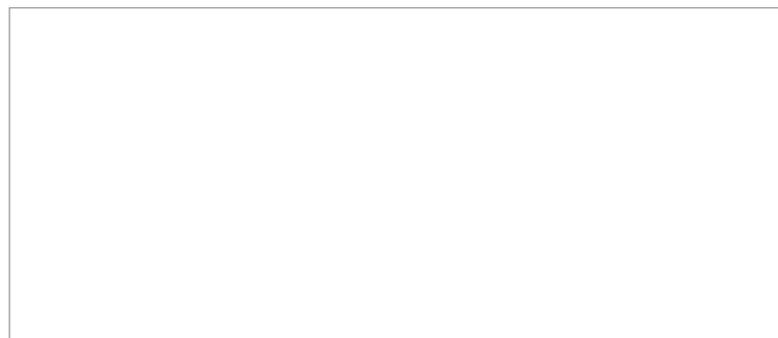

Ref. number: OME.2020.01

PROUD DISTRIBUTER OF



PART OF THE KINGSPAN GROUP



isomasters has taken all possible precautions to ensure that the contents of this publication are correct. However, the company accepts no liability for errors or information perceived as misleading. Proposals or descriptions concerning the final use or the application of products or methods are intended for information purposes only. Subject to change. **isomasters** accepts no liability in that regard.