

Eaton 93PM UPS 30-50 kW

Eaton 93PM UPS

Class-leading energy efficiency
with minimal operating costs



EATON

Powering Business Worldwide

The Eaton 93PM all-in-one solution

Introducing the Eaton 93PM UPS, helping you to combat the costs of energy and the ever-increasing power demands of IT infrastructure. Featuring industry-leading operating efficiency of 96.7% and world-class intelligent software solutions the 93PM is the surest way to secure the continuity of your mission-critical applications. All this compactly in 0.5 m².

Securing the continuity of your mission-critical applications

Your first step towards maximised power usage effectiveness and minimised total costs of ownership (TCO)

- 96.7% efficiency in double conversion
- > 99% efficiency with Energy Saver System (ESS)

Maximal power and energy density in a minimal 0.5 m² footprint

- Standard 10-20 minutes full load runtime with internal batteries

World class intelligent software solutions

- Intelligent Power Manager allows you to monitor and manage your UPS system as an integral part of power infrastructure
- Plugs into leading virtualisation management systems like VMware vCenter, Microsoft SCVMM and Citrix XenCenter



The Eaton 93PM UPS occupies only 0.5 m² floorspace

Intuitive user interface

- Display shows power quality, energy consumption and efficiency trends
- Data logging feature allows easy measurement, monitoring and managing

The Eaton 93PM UPS is an all-in-one solution that minimises your total costs of ownership. Our ethical standards give you the assurance that we deliver exactly what we promise in terms of performance, and our partnerships help you to achieve more efficient data centres.



ALL REAL POWER
WITH EATON 93PM UPS
kW = kVA

Features and benefits

The Eaton 93PM UPS provides 96.7% energy efficiency in double conversion

On-line double conversion topology secures the UPS output is not affected by any abnormalities in the utility power and keeps critical load equipment protected against all common power problems.

With Eaton 93PM UPS, modern multilevel converter technology ensures that in double conversion no energy is wasted and the UPS operating efficiency is top-of-market 96.7% resulting in significant savings in operational costs.

Energy Saver System delivers superior > 99% efficiency

Even small increases in UPS efficiency can quickly translate into thousands of euros, realised in more real power and lower cooling costs. Energy Saver System enables > 99% efficiency across the typical UPS operating range.

In ESS, load is powered securely through static bypass line with double conversion available on-demand with typical 2 ms transition time in the event of any abnormality on supply source. When operating in ESS mode, load is protected with inherent surge suppression.

When utility power quality is high, ESS can reduce UPS power losses by 75% as it runs on double conversion only when needed.

More power in a small footprint

The Eaton 93PM UPS is a high power density solution. In a footprint of just 0.5 m², it can provide full rated power and standard backup time with internal batteries.

Advanced battery management

Unique charging algorithm prolongs battery service life significantly compared to traditional charging methods. Automatic battery tests ensure any defects on batteries are detected and any failed blocks replaced on time. Battery health data is available for viewing easily through the display. By being able to monitor the condition of batteries and history log of test data, system maintenance can be better planned and scheduled ahead.

Accessories and options


A variety of options and accessories are available to further tailor the UPS solution to meet your specific needs:

UPS options

- Internal maintenance bypass switch
- Variety of connectivity card options

Accessories

- Extended runtimes with line-and-match external battery cabinets
- External maintenance bypass (wall mountable)
- Variety of other external switchgear and power distribution solutions

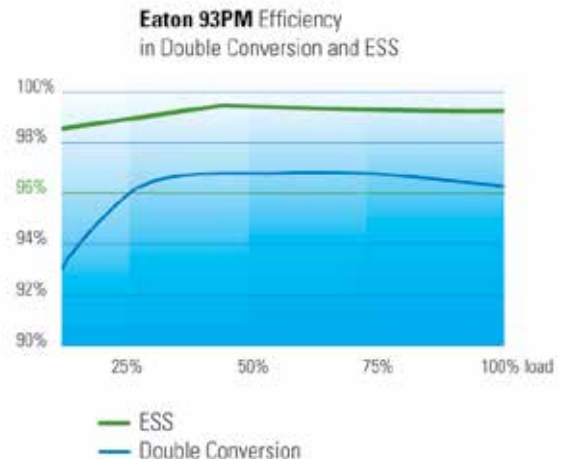

PREMIER POWER QUALITY FOR YOUR

- Virtualised data centres
- Mission-critical applications
- IT infrastructure

Software and connectivity

Intelligent Power Software (IPP/IPM)

The Eaton 93PM UPS is designed for the most advanced IT environments, and it comes with interfaces for Web and SNMP as standard.

Our Intelligent Power Manager® software is a productivity tool for administrators of several power devices and shutdown applications.

Intelligent Power Manager plugs into leading virtualization management systems like VMware vCenter, Microsoft Systems Center and Citrix XenCenter, consolidating power information to the same tool that is used to monitor and manage physical and virtual servers, storage and networks. In case of power failure it can also trigger actions like live migration of virtual machines, controlled shutdown or disaster recovery.



Inside the Eaton 93PM UPS

Communications and connectivity

Three MiniSlots for additional connectivity hardware

Built-in device and host USB

Five alarm inputs and dedicated EPO

Alarm relay output
(more available as option)

Battery start

Input switchgear

System static bypass switch

Integrated maintenance bypass switch (MBS) (optional)



Uninterruptible power module (UPM)

Battery breaker

Internal batteries

Input, output bypass and battery terminals

Eaton's heritage in industry-leading UPS design and production



For more than 50 years, Eaton has been safeguarding the critical systems of businesses across the globe. Whether protecting a single desktop or the largest data centre, Eaton solutions provide clean, uninterrupted power to keep mission-critical applications working.

We offer a comprehensive range of environmentally-sensitive, efficient, reliable UPSs, surge protective devices, power distribution units (PDUs), remote monitoring, meters, software, connectivity, enclosures, airflow management and professional services.

We work with IT and facilities managers to effectively manage power in virtually every business segment, including data centres, retail outlets, healthcare organisations, governmental agencies, manufacturing firms, broadcasting companies, financial institutions, and a wide variety of other applications.

Our solutions provide the power to make a difference, helping you achieve your business goals while maintaining environmentally sustainable enterprises.

A world-class support structure.

As an industry-leading UPS provider, at Eaton we're constantly working to ensure that our service standards meet your needs precisely. Our trained service team is on hand 24/7 to minimise risks by detecting and addressing problems before they happen. In Europe, Middle East and Africa region Eaton's service network consists of more than 120 field engineers who receive comprehensive, up-to-date training on the latest products and technologies.

We confidently guarantee the experience and know-how of our servicing resources to provide a dedicated support package which helps to ensure your equipment is running safely, reliably, sustainably and energy-efficiently at all times.

To find out more, please visit

www.eaton.eu/93PM



“ Committed to creating and maintaining powerful customer relationships based on a foundation of excellence. ”

Eaton 93PM UPS Technical Specifications

General	
UPS output power rating (1.0 p.f.)	30, 40, 50 kW
Efficiency in double conversion mode	96.7%
Efficiency in Energy Saver System (ESS)	99%
Field upgradeable	Yes, up to 50 kW
Inverter/rectifier topology	Transformer-free IGBT with PWM
Audible noise	55 dBA at 75% load 60 dBA at 100% load
Altitude (max)	1000 m without derating (max 2000 m)

Input	
Input wiring	3 ph + N + PE
Nominal voltage rating (configurable)	220/380, 230/400, 240/415 V 50/60 Hz
Input voltage range	High +20% rectifier input, 10% bypass input Low -15% at 100% load, -40% at 50% load without battery discharge
Input frequency range	45-65 Hz
Input Power Factor	0,99
Input ITHD	< 3%
Soft start capability	Yes
Internal backfeed protection	Yes

Battery	
Battery type	VRLA
Charging method	ABM technology or Float
Temperature compensation	Optional
Battery nominal voltage (lead-acid)	432 V (36 x 12 V, 216 cells)
Charging current maximum	20.4 A
Battery start capability	Yes

Standard UPS						
Part number	Description	Rating	Full load runtime	Dimensions (WxDx H)	Weight (with battery)	
P-105000007-013	93PM-30(50)-MBS-BB-6x9Ah	30 kW	20 min	560 x 914 x 1876 mm	890 kg	
P-105000007-028	93PM-40(50)-MBS-BB-6x9Ah	40 kW	15 min	560 x 914 x 1876 mm	890 kg	
P-105000007-040	93PM-50(50)-MBS-BB-6x9Ah	50 kW	10 min	560 x 914 x 1876 mm	890 kg	

External Battery Cabinet					
Part number	Description	Battery	Dimensions (WxDxH)	Weight (with battery)	
P-105000017-002	93PM BAT-S 1x36 110W (250A)	110 W 12 V	575 x 914 x 1870 mm	517 kg	
P-105000017-004	93PM BAT-S 1x36 200W (250A)	200 W 12 V	575 x 914 x 1870 mm	795 kg	

Output	
Output wiring	3 ph + N + PE
Nominal voltage rating (configurable)	220/380, 230/400, 240/415 V 50/60 Hz
Output UTHD	< 1% (100% linear load) < 5% (reference non-linear load)
Output power factor	1.0
Permitted load power factor	0.8 lagging – 0.8 leading
Overload on inverter	10 min 102-110% 60 sec 111-125% 10 sec 126-150% 300 ms > 150%. On battery mode 300 ms > 126%
Overload when bypass available	Continuous < 115%, 20 ms 1000% Note! Bypass fuses may limit the overload capability

Accessories

External battery cabinets with long-life batteries, external maintenance bypass switch, integrated manual bypass, MiniSlot connectivity (Web/SNMP, ModBus/Jbus, Relay)

Communications	
MiniSlot	3 communication bays
Serial ports	Built-in host and device USB
Relay inputs/outputs	5 relay inputs and dedicated EPO 1 relay output

Compliance with standards	
Safety (CB certified)	IEC 62040-1
EMC	IEC 62040-2, EMC Category C2
Performance	IEC 62040-3

Due to continuing product improvement programs, specifications are subject to change without notice.