

Model ES1330L

LIGHT WEIGHT ELECTRIC SCISSOR LIFTS



MORE ECONOMIC

- Electric power for zero emissions and near-silent running indoors.

MORE PRODUCTIVE

- Boost efficiency with direct electric drive.

MORE ACCESS

- Get into more places with compact dimensions and precise control system.

SMART DESIGN

- Enjoy industry leading upcycles so you can work longer with higher productivity.

Preliminary version

Standard Features

- Proportional Controls
- Battery Condition Indicator
- 27 amp Multi- Function Universal Charger
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Movable, Removable Platform Control
- Lubrication Free Scissor Arm Brushings
- Scissor Maintenance Prop
- 55 cm Actuated Deck Extension
- Removable Ladder
- Pothole Protection system
- Cut Out Load Sensing System*

* Platform and Ground controls are prevented in the event of an overload.

Standard Specifications

- Drive Motors
- Batteries
- Charger (120/240V – 50/60HZ)
- Hydraulic System
- Tyres (Non-Marking Solid)
- Brakes
- 24V Electric
- 2 x 12V 105 amp-hr
- 27 amp (Universal Algorithm)
- 5 L
- 255 x 76 mm
- Electric/Friction

Accessories & Options

- Grund Alarm
- Coiled Platform Control Box Cable
- Flashing Amber Beacon
- Vehicle recovery System
- Ambient Noise Alarm
- Batteries (220AH- AGM)
- MDI (Ground)
- Drive Motor Covers
- AC Receptacle in Platform
- Lifting and Tie Down Points
- Fork Lift Pockets
- Steel Swing- Out Doors
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Dynamic Braking
- Anti vandalism package
- Gate Latch

Model ES1330L

LIGHT WEIGHT ELECTRIC SCISSOR LIFTS

Performance


• Working Height	5.8 m
• Platform Height - Elevated	3.8 m
A. Platform Height — Lowered	0.70 m
B. Platform Railing Height	1.1 m
C. Stowed Height (Rails Folded)	1.8 m
D. Platform Size (W x L)	0.61 m x 1.26 m
E. Deck Extension	0.55 m
F. Overall Width	0.76 m
G. Overall Length	1.46 m
H. Wheelbase	1.08 m
I. Ground Clearance	0.61 m
• Platform Capacity - indoor	227 kg
• Capacity on Optional Deck Extension	115 kg
• Lift/Lower Time	17/11 sec.**
• Maximum Drive Height	Fully Elevated
• Machine weight *	896 kg
• Maximum Ground Bearing Pressure	8.4 kg/cm ²
• Drive Speed - Lowered	3.8 km/h
• Drive Speed - Elevated	0.8 km/h
• Gradeability	25%
• Turning Radius - Inside	Zero
• Turning Radius - Outside	1.4 m

* Certain options or country standards may increase weight and/or dimensions.

** Without load

Preliminary version

Dimensions

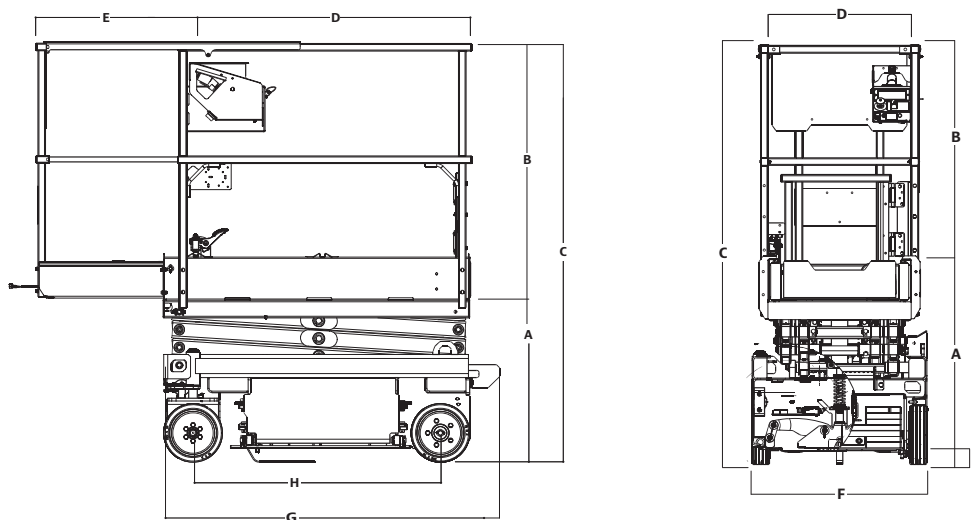

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company