




ANJCELL TECHNOLOGY CO., LTD

CR14505

Primary lithium batteries
Li-MnO₂ Power type AA size

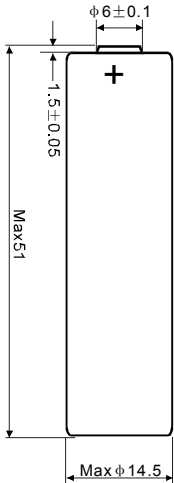

Unit: mm

Technical data



- Nominal capacity (at 1mA +20°C 2.0V cut off) 1.6Ah
- Nominal voltage (at 1mA +20°C) 3.0V
- Max. continuous current 1000mA
- Max. pulse current 2000mA
- Operating temperature range -40°C ~ +60°C
- Storage temperature (recommended) +30°C
- Weight Approx 20g

Main applications:

- Metering systems
- Alarms and security devices
- Memory back-up
- Tracking systems
- Utility metering
- GPS

Warning:

- Do not use if the battery casing was mangled
- Don't use different models of battery in series
- Soldering the tag should be finished in few seconds
- Do not try to recharge

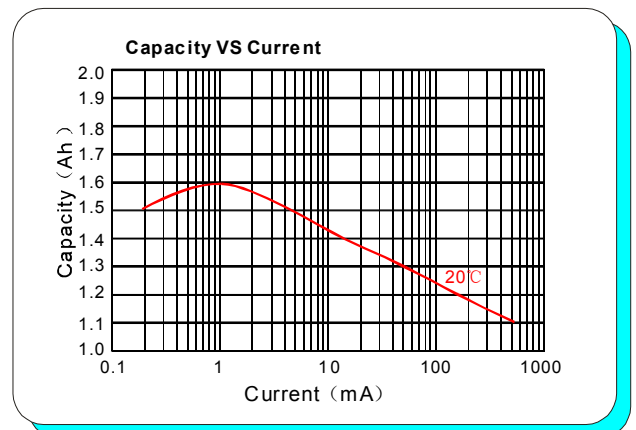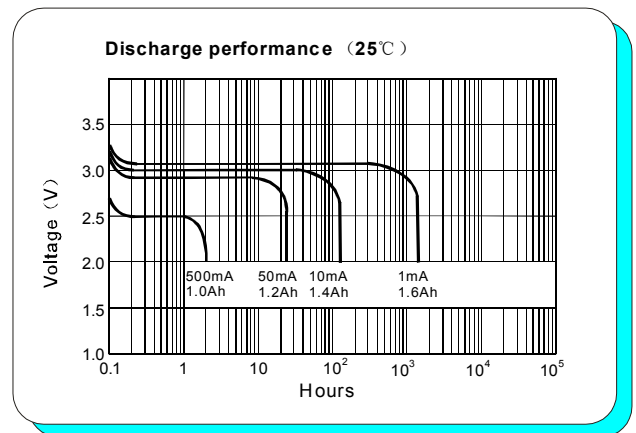

Important Notice:

Information and contents in this datasheet are for reference purposes only. They do not constitute a warranty.