



# MISTRAL SYSTEM and PREMIUM



We know how.

# The new MISTRAL: The inimitable hot-air blower.

Two model groups are available in this range – the MISTRAL <sup>2/4/6</sup> PREMIUM, and the top-of-the-range MISTRAL <sup>6</sup> SYSTEM. All MISTRAL <sup>6</sup> devices are equipped with a maintenance-free brushless blower motor, making them perfectly suited to continuous operation. The MISTRAL <sup>6</sup> SYSTEM can either be operated using its integrated controls or via an external system interface.





7. Automatic cool-down function

9. Integrated temperature probe

10. Target/actual values display

air volume

8. Remote control interface for temperature/

11

be switched on and off separately.

The MISTRAL PREMIUM can be switched from an internal to an external potenti-

ometer. As a result, the temperature can even be controlled from the outside.

Easy to switch:

### Hot-air blowers


# MISTRAL PREMIUM/SYSTEM




### MISTRAL PREMIUM

## Installation dimensions in inch

|                              | Α      | В    | С     |
|------------------------------|--------|------|-------|
| 230 V/2300 W                 | ø 1.44 | 4.05 | 12.5  |
| 230 V/4500 W                 | ø 2.0  | 5.2  | 13.67 |
| 230 V/3400 W<br>120 V/2400 W | ø 2.0  | 4.05 | 12.5  |



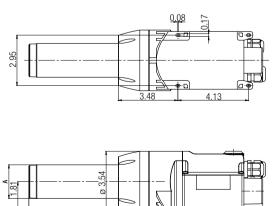


| Technical data                    |     | MISTRAL 2/4/6 PREMIUM |         |         |         |         |         |
|-----------------------------------|-----|-----------------------|---------|---------|---------|---------|---------|
| Model                             |     | 2                     | 4       | 6       | 6       | 6       | 6       |
| Voltage                           | V~  | 230                   | 120     | 120     | 230     | 230     | 230     |
| Power                             | W   | 3400                  | 2400    | 2400    | 2300    | 3400    | 4500    |
| Temperature open                  | °F  | 968                   | 914     | 806     | 832     | 950     | 1200    |
| Max. air volume (68 °F)           | cfm | 12.4                  | 10.6    | 12.4    | 10.6    | 12.4    | 14.1    |
| Pressure                          | psi | 0.5                   | 0.5     | 0.36    | 0.36    | 0.36    | 0.36    |
| Weight                            | lps | 3.1                   | 3.1     | 3.1     | 3.1     | 3.1     | 3.1     |
| Article no. MISTRAL 2/4/6 PREMIUM |     | 147.963               | 147.964 | 147.965 | 148.006 | 147.966 | 147.967 |

| Model                                   |            | MISTRAL <sup>6</sup> SYSTEM |              |              |              |              |              |
|---|------------|-----------------------------|--------------|--------------|--------------|--------------|--------------|
| Voltage                                 | V~         | 100                         | 120          | 200          | 230          | 230          | 230          |
| Power                                   | W          | 1500                        | 2400         | 3000         | 2300         | 3400         | 4500         |
| Temperature open                        | °F         | 1200                        | 1200         | 1200         | 1200         | 1200         | 1200         |
| Air volume (68 °F) min. max.            | cfm<br>cfm | 3.53<br>10.6                | 3.53<br>12.4 | 3.53<br>12.4 | 3.53<br>10.6 | 3.53<br>12.4 | 3.53<br>14.1 |
| Pressure                                | psi        | 0.5                         | 0.5          | 0.36         | 0.36         | 0.36         | 0.36         |
| Weight                                  | lps        | 2.6                         | 3.1          | 3.1          | 2.6          | 3.1          | 3.1          |
| Article no. MISTRAL <sup>6</sup> SYSTEM |            | 147.972                     | 147.969      | 147.973      | 147.975      | 146.701      | 147.971      |

| Frequency           | Hz    | 50/60           |
|---------------------|-------|-----------------|
| Emission levels     | dB(A) | 65              |
| Dimensions          |       | see bottom left |
| Mark of conformity  |       | C€              |
| Protection class II |       |                 |

We reserve the right to make technical changes

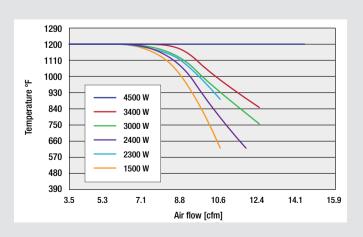





Leister Technologies Ltd. Shanghai 201 109 / PRC phone: +86 21 6442 2398 leister@leister.cn

Itasca, IL 60143 / USA phone: +1 630 760 1000 info@leisterusa.com

Leister Technologis KK Yokohama 222-0033 / Japan phone: +81 45 477 36 37 info@leister.co.jp

Leister Technologies Benelux BV 3991 CE Houten / Nederland phone: +31 (0)30 2199888 info@leister.nl

Leister Technologies India Pvt 600 041 Chennai / India phone: +91 44 2454 3436 info@lipipolymers.com

| and Service Centres in more than 90 countries. |             |                    |                           |  |  |  |  |
|--|-------------|--------------------|---------------------------|--|--|--|--|
| Europe:<br>Austria                             | Kazakhstan  | America:<br>Canada | <b>Africa:</b><br>Algeria |  |  |  |  |
| Dalama   | 1 - 1 - 1 - | N.A                | E control                 |  |  |  |  |

Latvia Mexico USA Lithuania Belgium Bulgaria Netherlands Argentina Croatia Brazil Norway Cyprus Poland Chile Czech Republic Portugal Columbia Estonia Romania Costa Rica Denmark Russia Ecuador Serbia Venezuela Finland France Slovakia Peru Germany Slovenia Great Britain Spain Greece Sweden

Switzerland

Turkey

Ukraine

Kenya Morocco South Africa Tunisia

Middle East: Asia Pacific: U.A.E. P.R.China Saudi Arabia Hong Kong Qatar India Indonesia Iran Japan Korea Malaysia Mongolia Philippines Singapore Taiwan Thailand

> Oceania: Australia New Zealand

Vietnam

© Copyright by Leister, Switzerland

Distributor Addresses:

Hungary

Ireland

Iceland

Italy