


NS041 for the wrench in AL-BR

- V ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~
- V ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~ ~~XXXXXXXXXX~~



BAM Design-type tested
 Certification N°: BAM/ZBF/002/21

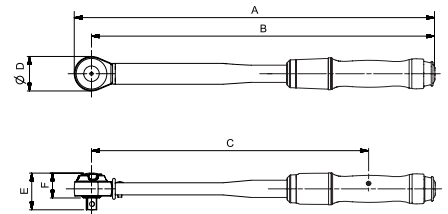

Code AL-BR	Nm	ft-lb	Male square	A mm	B mm	C mm	D mm	E mm	F mm	g
NS041-8-25	5-25	3.75-18.75	1/4"	290	277	214	27	13,5	20,5	410
NS041-12-50	10-50	7.5-37.5	3/8"	360	340	270	40	33	22,5	930
NS041-16-100	20-100	15-75	1/2"	405	385	315	40	37	22	1030
NS041-16-200	40-200	30-150	1/2"	500	480	410	40	37	22	1220
NS041-16-260	60-260	45-195	1/2"	595	575	505	40	37	22	1420
NS041-24-670	150-670	110-500	3/4"	1150	1139	1069	63	55,5	33,5	5620
NS041-32-900	200-900	150-675	1"	1245	1234	1164	63	60,5	33,5	7130

Non stock items. Lead Time from our supplier to EDC 5-7 weeks




FEATURES & BENEFITS

NSB041 for the wrench in CU-BE

1. Made of copper beryllium
2. Large dual scale in N.m/ft.lb
3. Reversible ratchet head allowing clockwise operation only
4. Micrometer and main scale for adjustment
5. Solid plastic construction handle with a nice positive lock which engages or disengages clearly
6. Good positive sound engagement and the wrench always returns to home after each test
7. Accurate to $\pm 6\%$ of reading
8. Ratchet with 24-45 teeth and easy to change direction lever on the top of the head
9. Supplied with a Declaration of conformity traceable to international standards
10. All in individual rigid case for maximum protection and storage
11. Non-sparking (NS) tools designed for use in potentially explosive environments, where 'traditional' steel tools may create spark
12. Anti-magnetic and highly corrosion resistant



BAM Design-type tested
Certification N°: BAM/ZBF/003/21

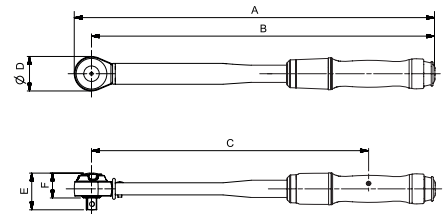

Code CU-BE	Nm	ft-lb	Male square	A mm	B mm	C mm	D mm	E mm	F mm	g
NSB041-8-25	5-25	3.75-18.75	1/4"	290	277	214	27	13,5	20,5	420
NSB041-12-50	10-50	7.5-37.5	3/8"	360	340	270	40	33	22,5	960
NSB041-16-100	20-100	15-75	1/2"	405	385	315	40	37	22	1070
NSB041-16-200	40-200	30-150	1/2"	500	480	410	40	37	22	1280
NSB041-16-260	60-260	45-195	1/2"	595	575	505	40	37	22	1500
NSB041-24-670	150-670	110-500	3/4"	1150	1139	1069	63	55,5	33,5	5750
NSB041-32-900	200-900	150-675	1"	1245	1234	1164	63	60,5	33,5	7250

Non stock items. Lead Time from our supplier to EDC 5-7 weeks

