


TECHNICAL FEATURES

- Aluminium NON-REMOVABLE side panels, h 50 mm
- Belt: antistatic, cut-proof and oil-proof, with smooth grey Polyurethane covering.
Slats H=30mm / Pitch 400mm.
Belt thickness 1,7 mm
- Temperature resistance:
Continuous: from -10°C to +90°C
Momentary: from -30°C to +110°C
- NORD transmission group 0.12 kW three-phase, asynchronous motor + worm reduction unit with permanent lubrication
- Fixed standard speed: 3,5 m/min
- Start/Stop switch with 5 m cable
- Voltage: 400V / 3-fase / 50Hz

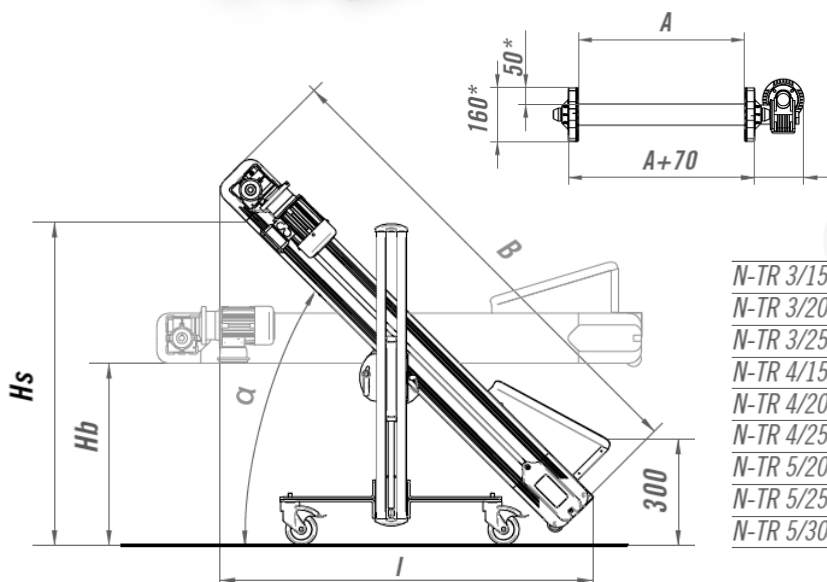

	A	B	α	Hb	Hs
N-TR 3/15	340 mm	1500 mm	0°- 45°	550 mm	900 mm
N-TR 3/20	340 mm	2000 mm	0°- 40°	550 mm	1100 mm
N-TR 3/25	340 mm	2500 mm	0°- 35°	550 mm	1250 mm
N-TR 4/15	440 mm	1500 mm	0°- 45°	550 mm	900 mm
N-TR 4/20	440 mm	2000 mm	0°- 40°	550 mm	1100 mm
N-TR 4/25	440 mm	2500 mm	0°- 35°	550 mm	1250 mm
N-TR 5/20	540 mm	2000 mm	0°- 40°	550 mm	1100 mm
N-TR 5/25	540 mm	2500 mm	0°- 35°	550 mm	1250 mm
N-TR 5/30	540 mm	3000 mm	0°- 30°	550 mm	1350 mm


BOE-THERM

PA



TECHNICAL FEATURES

- Belt: antistatic, cut-proof and oil-proof, with smooth grey Polyurethane covering.
Belt thickness 1,7 mm
- Temperature resistance: from -10°C to +90°C
- Transmission group: Interroll roller motor \varnothing 80 mm
- Fixed standard speed \sim 4 m/min
- Start/Stop switch
- Voltage: 400V / 3-fase / 50Hz





A	B	H
<i>min 100 mm</i>	<i>min 600 mm</i>	<i>min 200 mm</i>
<i>max 2000 mm</i>	<i>max 60 m</i>	<i>max 2000 mm</i>

BOE-THERM



TECHNICAL FEATURES

- Belt: antistatic, cut-proof and oil-proof, with smooth grey Polyurethane covering.
Belt thickness 1,7 mm
- Temperature resistance: from -10°C to +90°C
- Standard transmission group composed of three-phase motor, worm reduction unit with lubrication for life
- Fixed standard speed ~4 m/min
- Start/Stop switch
- Voltage: 400V / 3-fase / 50Hz

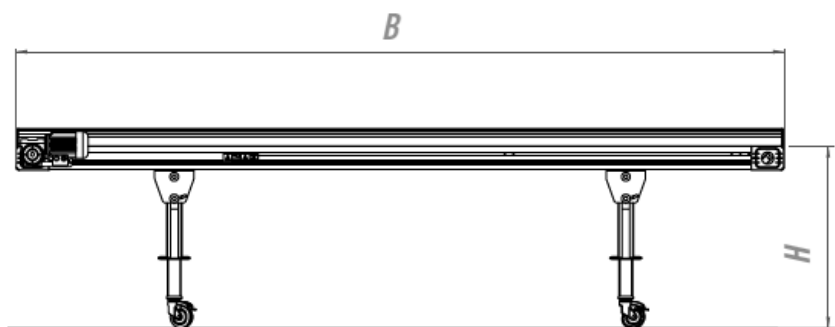

<i>A</i>	<i>B</i>	<i>H</i>
<i>min 100 mm</i>	<i>min 600 mm</i>	<i>min 200 mm</i>
<i>max 2000 mm</i>	<i>max 60 m</i>	<i>max 2000 mm</i>