

# ELEVAH®

the ladder that lifts you

We have been repeating this for years, with the new Elevah® Electrical Ladders work times are reduced, fatigue and accidents are halved, and labour costs are reduced **by 50%.**

A wide, complete, and updated range of products guarantees constant safety and meets every requirement.




## SAVE TIME, EFFORT AND MONEY IN MAXIMUM SAFETY.

### Save time.

Elevah® Electrical Ladders allow you to save time as you do not need to step up and down continuously from the ladder every time you have to move position.

Moreover, thanks to the Picking solution, the goods or work equipment are always at hand and safe.

### HALVE THE WORK TIME WITH ELEVAH

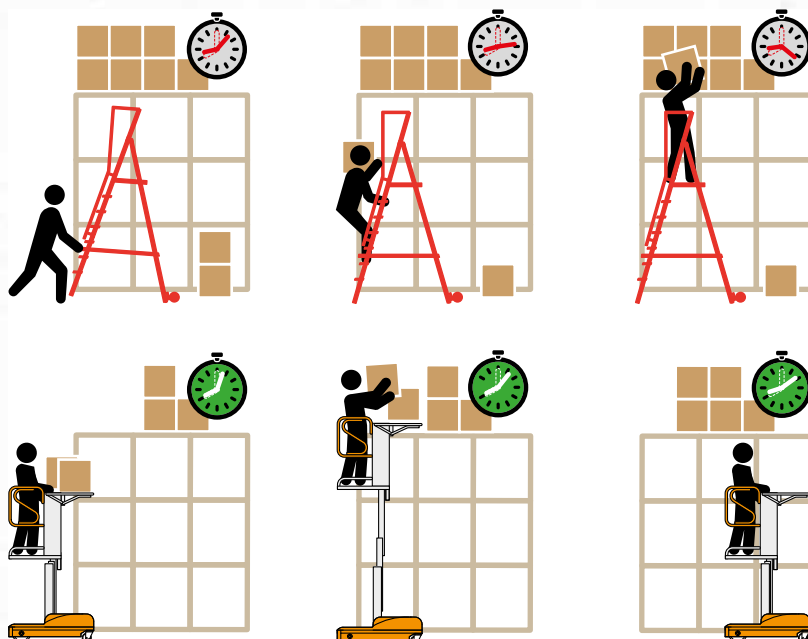


## Save effort.

Fatigue, falls, distortions, absences from work due to injuries, etc.

With Elevah® Electric Ladders many of these problems are solved.

A work station where you do not have to step up and down continuously, but everything occurs safely and comfortably.

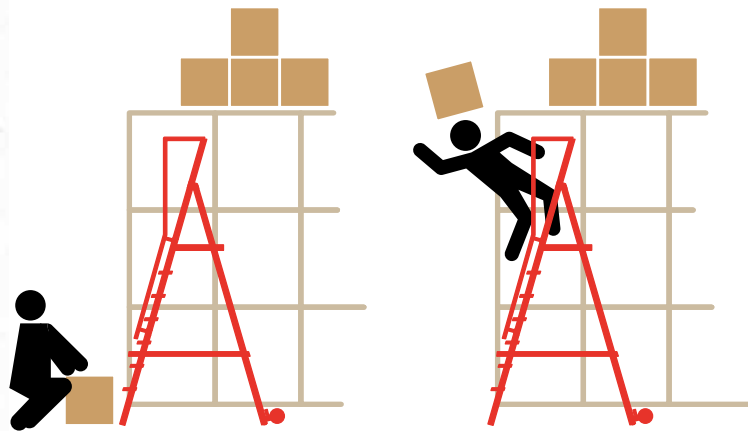


## Save money.

Why having two operators when the same operation can be performed by one single person?

**50% saving immediately**, the best way to reduce costs and boost your morale

and your business. Easy to displace and handle, thanks to its compact dimensions. This reduces work times and risk of accidents.

**OVERALL DIMENSIONS  
ARE REDUCED BY 70%  
WITH ELEVAH**

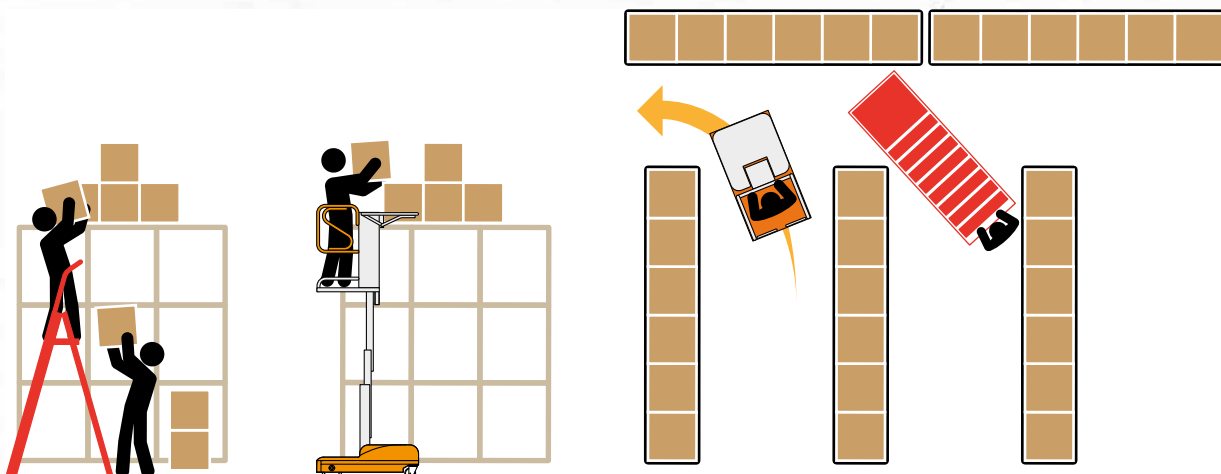




# ELEVAH 51 MOVE® picking model

Elevah 51 Move® is the only self-propelled automatic ladder made entirely of aluminum, by restrained weight, 335 kg, and with a payload of 200 kg.

Extremely easy to handle, it reaches 5-10 m of height and guarantees quick and safe operations, quick self-propelled movements: 7 m/h of maximum speed.

Easy to manoeuvre and safe, with high turning radius:  
**It turns on itself.**

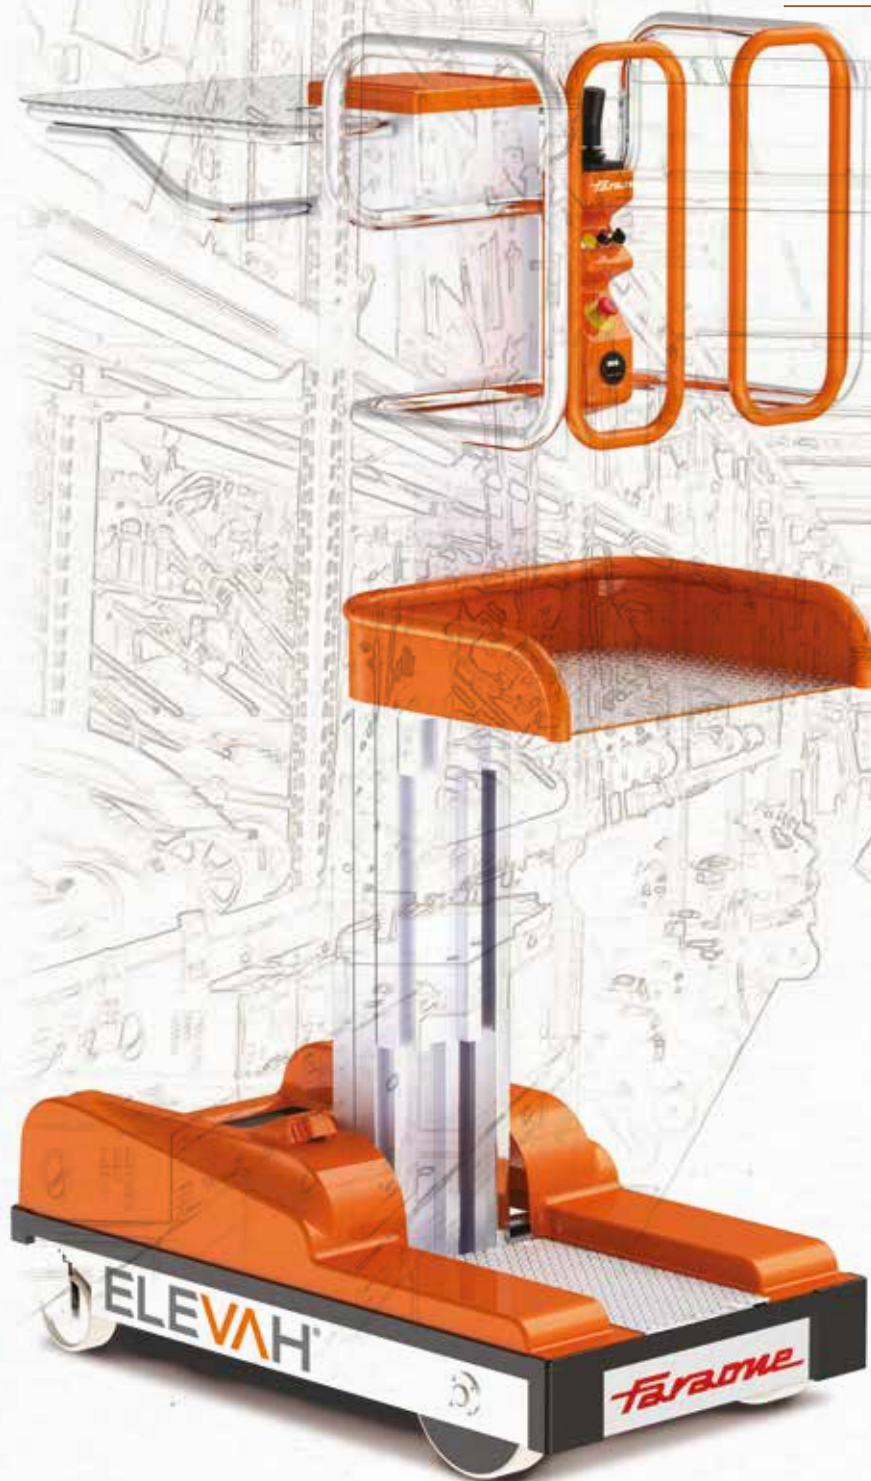

EVERYTHING  
ALWAYS UNDER  
CONTROL

Single lever joystick for a comfortably and easily movement.





## IN LITTLE EVERYTHING YOU NEED.

Wide and versatile worktop, comfortable support stand and space for the operator, all this in just 77 x 141 cm.



Large work surface for the operator.  
Height of only 30 cm for easy access.



Large automatically height-adjustable storage compartment.

The 10 cm underbody height allows you to overcome any rough edges.

**The anti-tilting device activates automatically when the maximum inclination is reached.**

HEIGHT FROM  
THE GROUND . 10 cm >



ELEVAH 51 MOVE




SELF-PROPELLED AT THE HEIGHT

# ELEVAH51MOVE<sup>®</sup> picking

## Technical data sheet

Lift capacity 200	200 KG
Operators	1
Use	internal
Picking plate capacity	100 Kg.
Machine weight	330 Kg.
Power Source	24V
Batteries 2 x 12 V – 95 A	acid
Battery charger	110V-220V
Max. gradient raised	4%
Driving wheels dimensions	Ø 300 x 76
Idle wheels dimensions	Ø 150 x 40
Turning radius	0
Max. lifting speed	0,20 m/s
Max. lowering speed	0,20 m/s
Max. drive speed stowed	7 Km/h
Max. drive speed raised	2,5 Km/h

<b>A</b>	Stowed height	1430 mm
<b>B</b>	Min. platform height from the ground	325 mm
<b>C</b>	Min. picking height from the ground	690 mm
<b>D</b>	Picking plate stroke	640 mm
<b>E</b>	Max. platform height from the ground	3000 mm
<b>F</b>	Max. picking from the ground	4010 mm
<b>G</b>	Footprint	770 mm
<b>H</b>		1410 mm
<b>I</b>	Internal basket dimensions	570 mm
<b>J</b>		690 mm
<b>K</b>	Picking plate dimensions	780 mm
<b>L</b>		760 mm

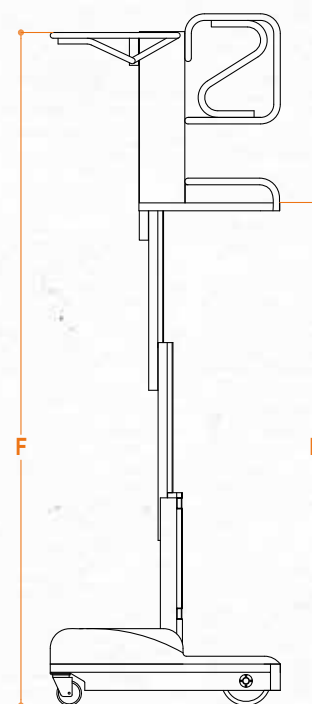

ELEVAH 51 MOVE picking

TECHNICAL DATA



Certification issued by TÜV.

**In accordance with European standards on forklift with man on height. EN 1723-1 / UNI EN 1726-2.**