







BAG FILTER HOUSING SIZE 3 & 4

Ultra-Wound

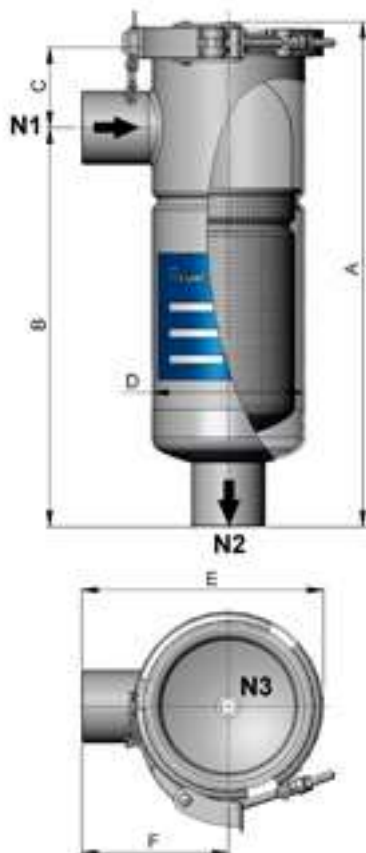

Technical Data

-  AISI 304 or AISI 316
-  100-150 l/min
-  10 bar
-  -10 to +90°C
-  FPM Gasket (others available)

The filter housings of the ALSI series (size 3/4) are welded stainless steel constructions to the admission of a filter bag of the size 3 or. the size 4.

They exist of a vertical, cylindrical shell with welde protection split pin, therefore the lid during of the filtration process cannot be opened uncontrollably. The filter bag is fixed in the housing by a down holder in his situation reliably and is sealed. The supporting basket from stainless steel provides for a support sure about pressure of the used filter bag.

OPTIONS



Clamp Closing



Swing Bolt Closing

Model	Flow l/min	Connection in/out	Bag size	Dimensions (mm)					
				A	B	C	D	E	F
ALSI 3	100	1 ½"	3	380	299 ±5	60	ø114,3	~180	110 ±5
ALSI 4	150	1 ½"	4	535	454 ±5	60	ø114,3	~180	110 ±5