
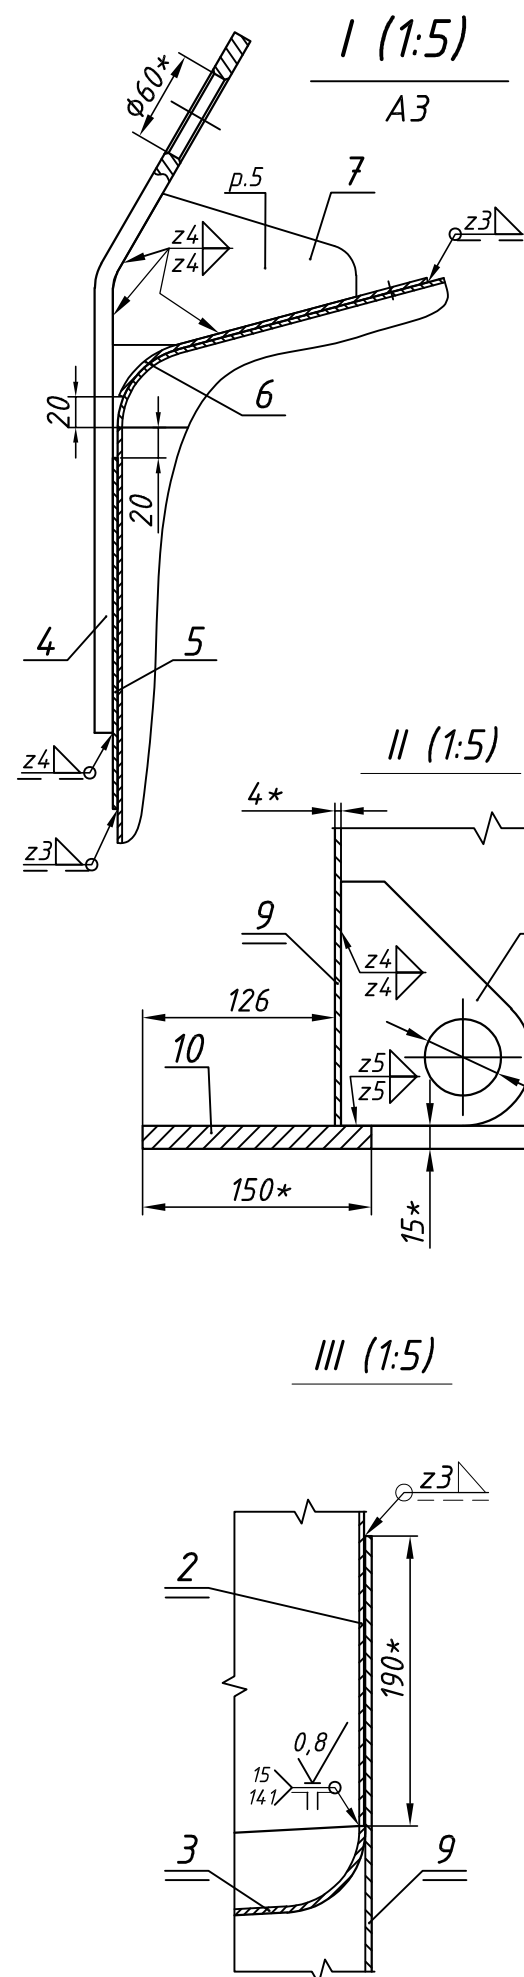
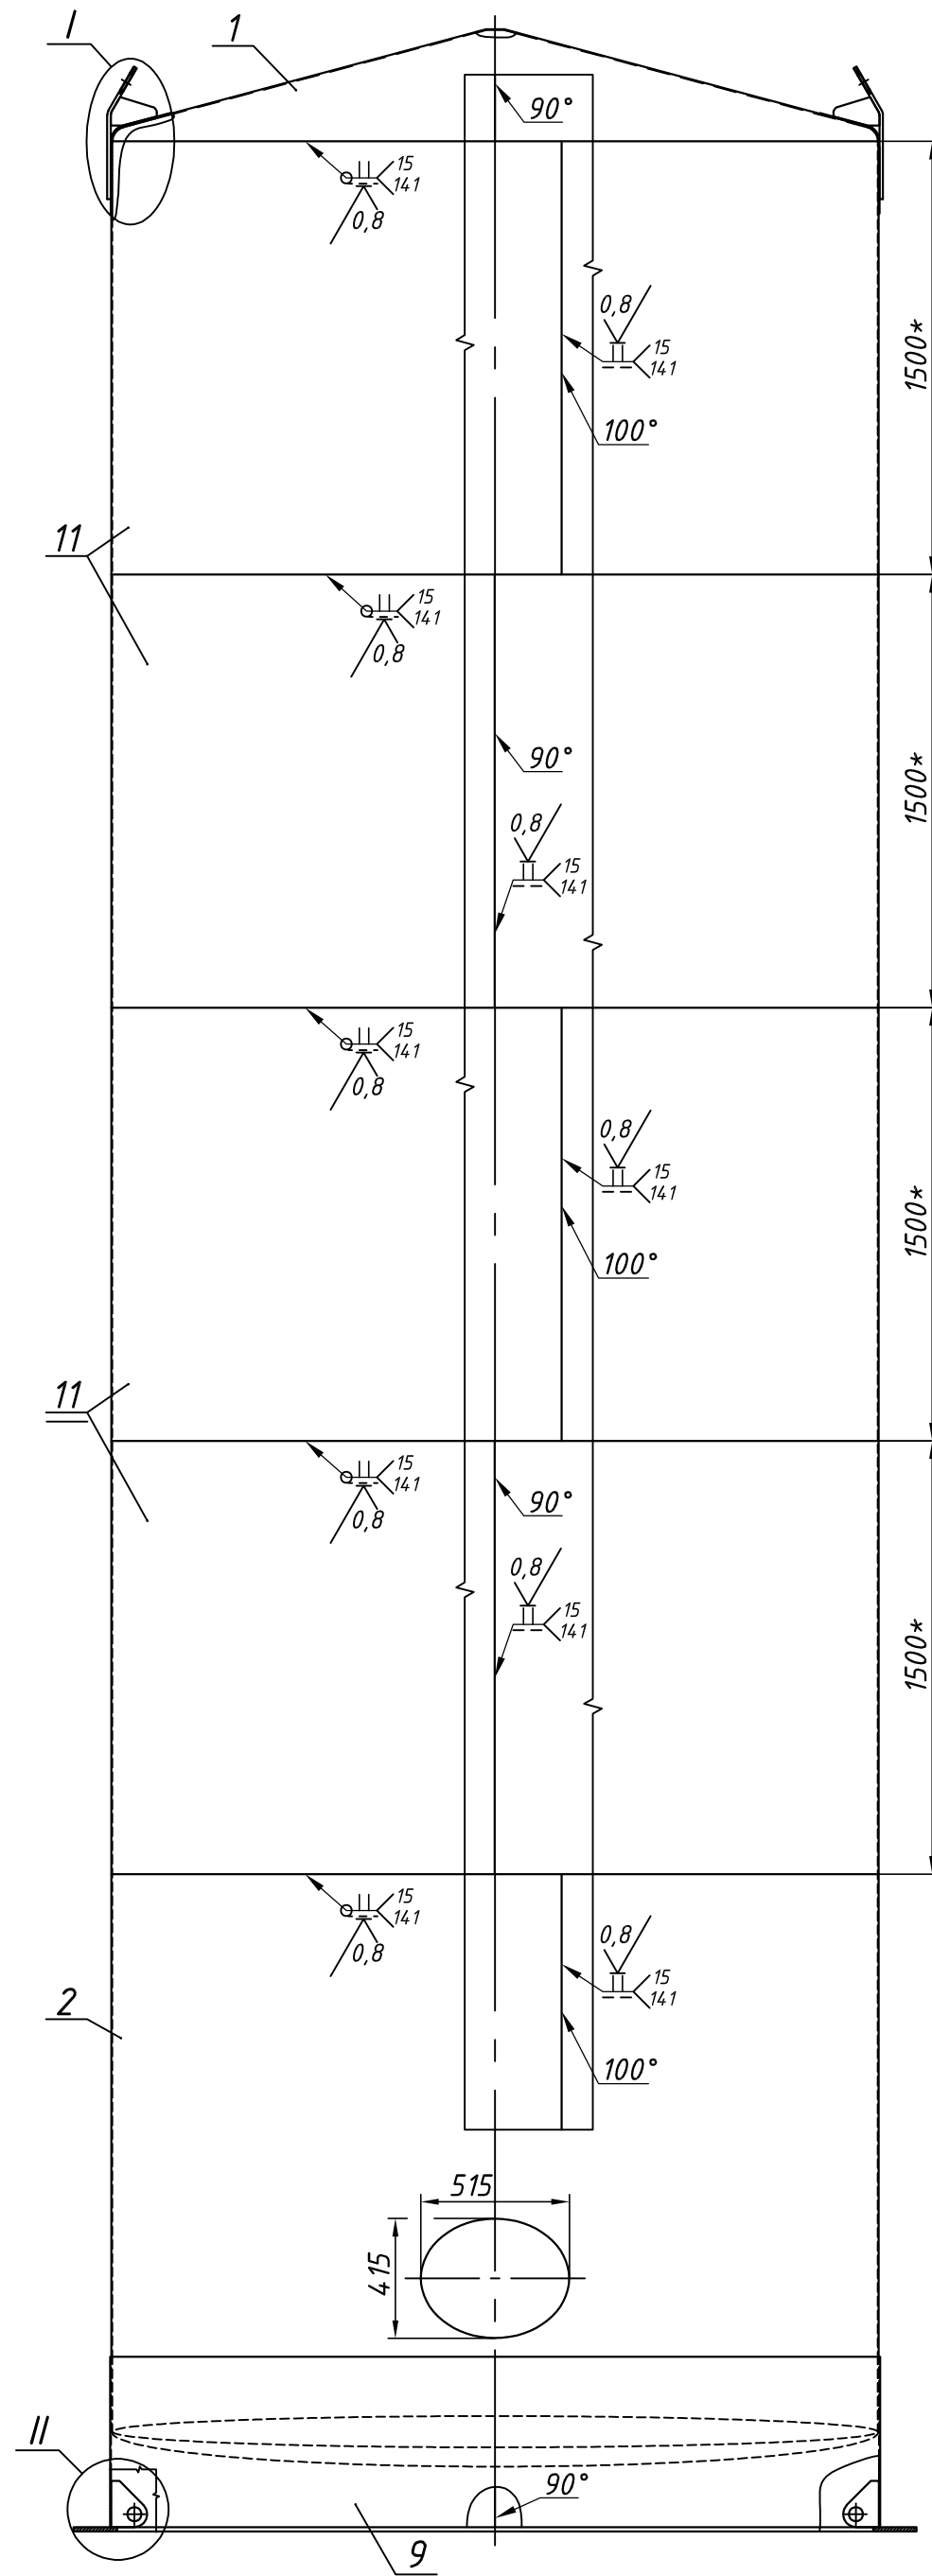


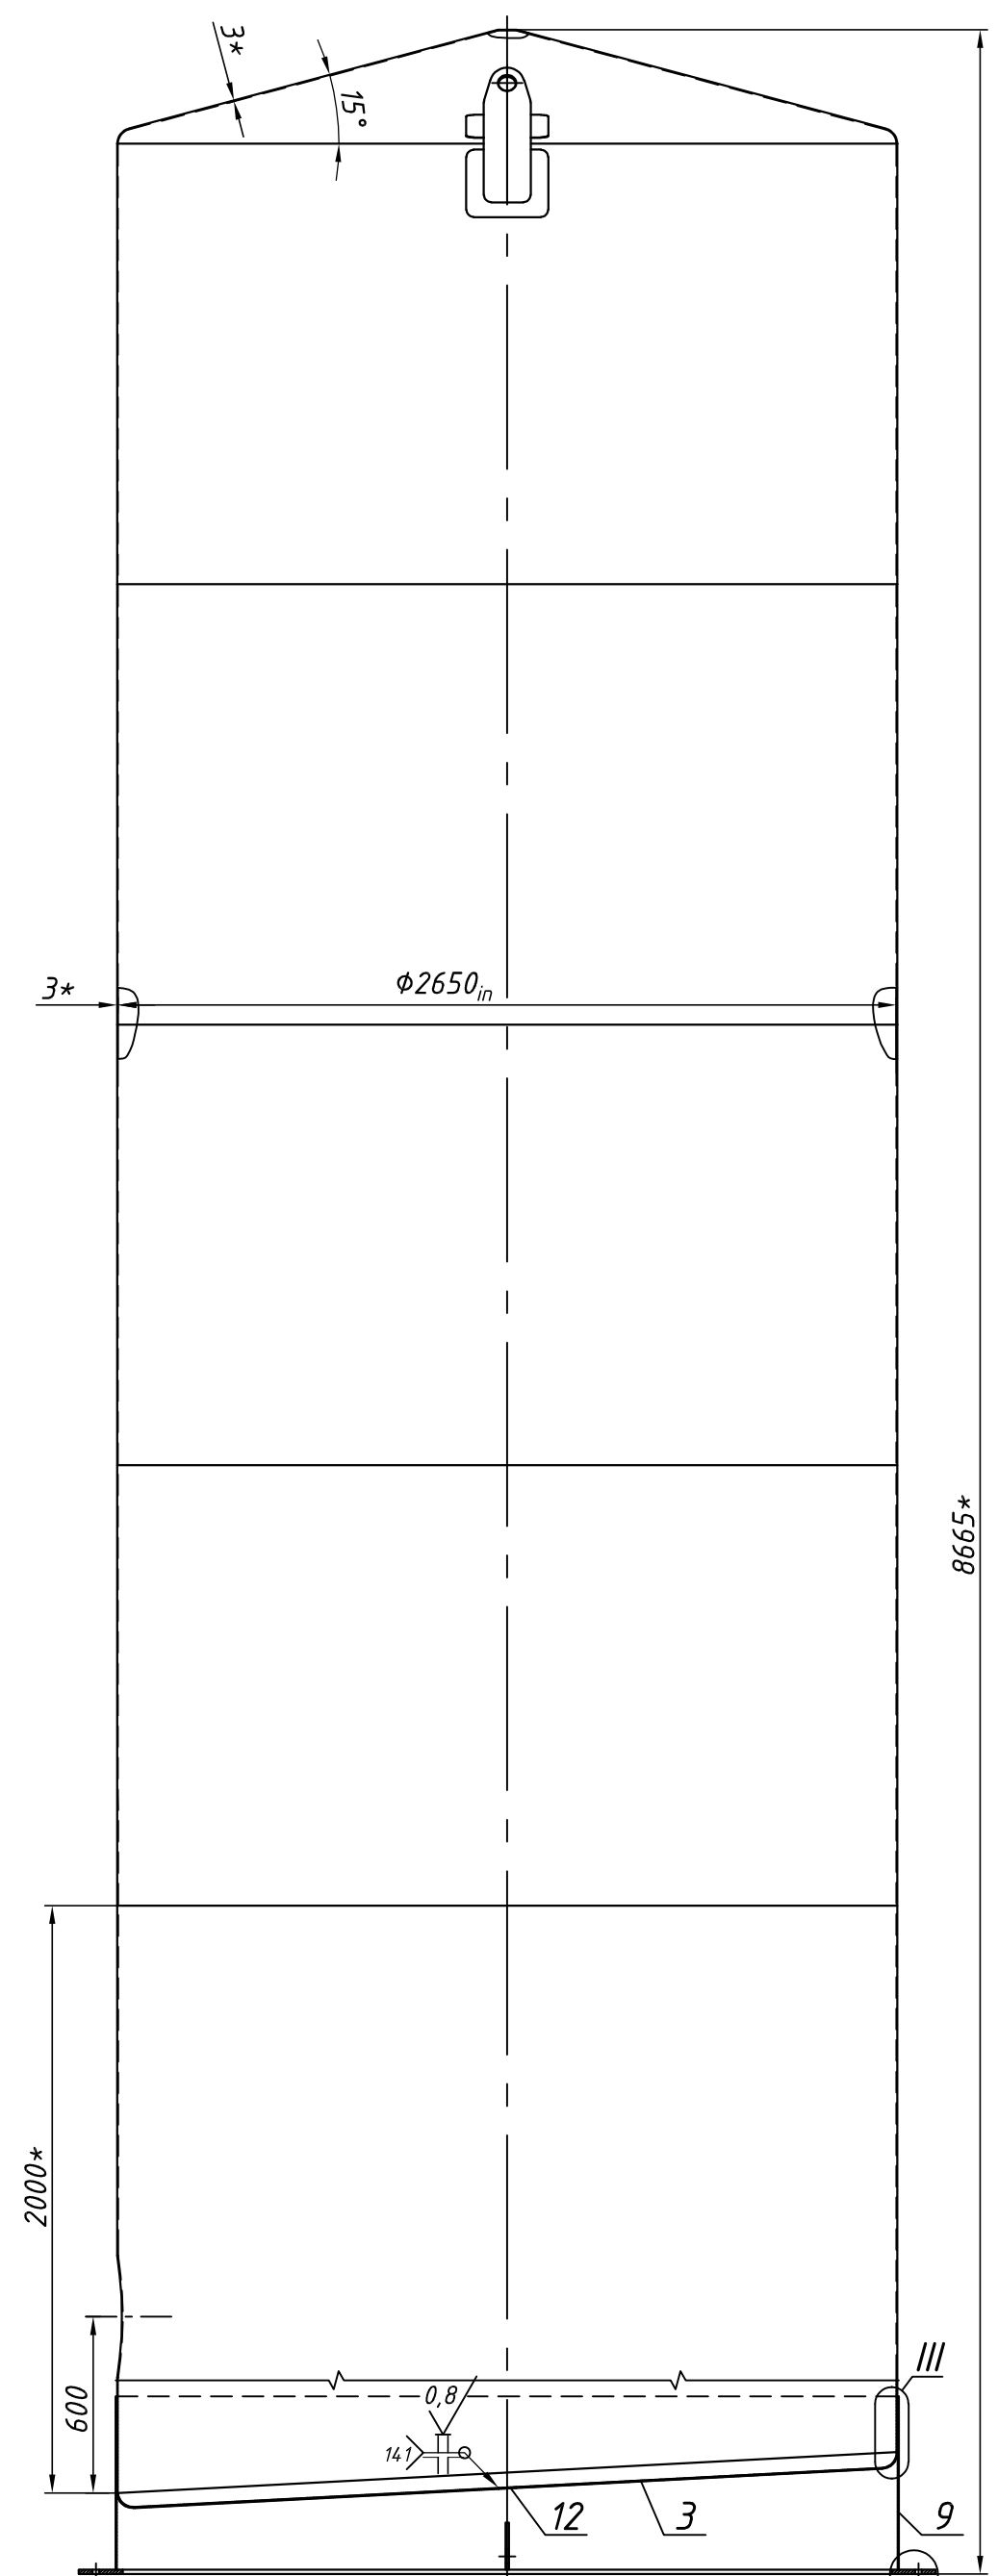

- 1.*For information only.
2. Non mentioned tolerances - holes H16, shafts h16, other $\pm IT16/2$.
3. Not mentioned surface roughness Ra 12,5 μm .
4. Cylinders pos.2 and 11 must be checked according to cones pos.1 and pos.3.
5. Mark (punched in) tanks serial numbers: 35126428-010-01 or 35126428-010-02.

[illegible]