

NOS



Steel wire ropes & accessories
Stålwirer & tilbehør





Hand splicing of a steel wire rope

Håndsplesning af wire

Index

Standard wire rope slings1.4
7X191.5
PVC covered steel wire ropes1.5
7X19 AISI 3161.5
6X36+IWRC AISI 3161.6
6X36+FC1.6
6X36+IWRC1.7
6X36+IWRC compacted1.8
35X7 Compacted1.9
4X36 + FC1.9
Wire rope grommet sling1.10
STD. Thimble1.11
Heavy duty Thimble1.11
Stainless thimble1.11
SECU wire grip1.13
Wire rope grip DIN 7411.13
Aluminum ferrules1.14
Copper ferrules1.14
Tubular thimble with gusset1.15
Solid thimble1.16
Closed spelter socket1.17
Open spelter socket1.18
Open wedge socket1.19
CR socket1.20
Super reeve connector socket1.21
Super reeve connector swivel socket1.22
Snatch block S series with shackle1.23
Wire block - Single sheaved1.24
Wire block - Double sheaved1.24
Wire block - Triple sheaved1.24
Stainless rope block w/swivel eye1.25
Single block w/Nylon sheave1.25
Double block w/Nylon sheave1.25
Rope tensioning clip1.26
Cable grips1.26
Wirelock1.27
Wire rope grease - Fluid1.27
Wire rope oil1.27

Indhold

Standard wirestopper1.4
7X191.5
PVC forhuede stålwirer1.5
7X19 AISI 3161.5
6X36+IWRC AISI 3161.6
6X36+FC1.6
6X36+IWRC1.7
6X36+IWRC kompakt1.8
35X7 Kompakt1.9
4X36 + FC1.9
Endeløse wirestopper1.10
STD Kovs1.11
HD Kovs1.11
Rustfri kovs1.11
SECU wirelås1.13
Wire lås DIN 7411.13
Aluminiumslåse1.14
Kobberlåse1.14
Rørkovs med kile1.15
Massiv kovs1.16
Lukket wiresko1.17
Åben wiresko1.18
Kilewirelås1.19
CR wiresko1.20
Super wiresko for mobilkran1.21
Super wiresko1.22
Kasteblok S serie med sjækel1.23
Wireblok - Enkelt skivet1.24
Wireblok - Dobbelt skivet1.24
Wireblok - Tredobbelt skivet1.24
Rustfri tovværksblok m. svirveløje1.25
Enkelt blok m. Nylonhjul1.25
Dobbelt blok m. Nylonhjul1.25
Trækstrømpe1.26
Trækstrømpe1.26
Wirelock1.27
Wirefedt - Flydende1.27
Wireolie1.27



Standard wire rope slings

- Made of 6x36 WA/SE - 1770 N/mm²
- Galvanized



Standard wirestrapper


- Fremstillet af 6x36 WA/SE - 1770 N/mm²
- Galvaniseret



7X19

- Galvanized
- Steel core


Art. No.	dia. mm	kg/100 mtr	MBL ton - 1960 N/mm ²
01 04 0001	3,0	3,43	0,65
01 04 0002	4,0	6,10	1,16
01 04 0003	5,0	9,53	1,81
01 04 0004	6,0	13,7	2,61
01 04 0005	8,0	24,4	4,63



PVC covered steel wire ropes

- Galvanized
- Fiber core


Art. No.	dia. mm	Inner dia. mm	Construction	Weight approx. kg/100mtr.	MBL ton - 1960 N/mm ²
01 74 0000	2,5	1,8	6x7+FC	3,43	0,65
01 74 0001	3	2	6x7+FC	6,10	1,16
01 74 0002	4	3	6x7+FC	9,53	1,81
01 74 0003	5	3	6x7+FC	13,7	2,61
01 74 0005	6	4	6x7+FC	24,4	4,63
01 74 0008	8	6	6x19+FC	30,9	5,86
01 74 0009	10	8	6x19+FC	38,1	7,24



7X19 AISI 316

- Stainless
- Steel core

Art. No.	dia. mm	kg/100 mtr	MBL ton - 1570 N/mm ²
01 56 0001	2,0	1,52	0,23
01 56 0002	3,0	3,43	0,52
01 56 0003	4,0	6,10	0,93
01 56 0004	5,0	9,50	1,45
01 56 0005	6,0	13,7	2,09
01 56 0007	8,0	24,4	3,71
01 56 0008	10,0	38,1	5,80
01 56 0009	12,0	54,9	8,35



7X19

- Galvaniseret
- Stålhjerte

PVC forhuede stålwirer

- Galvaniseret
- Fiberhjerter

7X19 AISI 316

- Rustfri
- Stålhjerte

Art. No.	Wire dia. mm	1-legged-ton		2-legged-ton		3 & 4-legged-ton	
01 59 0001	8	0,76	0,53	1,06	0,76	1,59	1,14
01 59 0002	10	1,10	0,77	1,54	1,10	2,30	1,65
01 59 0003	12	1,70	1,19	2,38	1,70	3,50	2,55
01 59 0004	14	2,30	1,60	3,20	2,30	4,80	3,40
01 59 0005	16	3,00	2,10	4,20	3,00	6,30	4,50
01 59 0006	18	3,80	2,60	5,20	3,80	7,90	5,70
01 59 0007	20	4,70	3,30	6,60	4,70	9,80	7,00
01 59 0008	22	5,70	4,00	8,00	5,70	11,9	8,50
01 59 0009	24	6,80	4,70	9,40	6,80	14,2	10,2
01 59 0010	26	8,00	5,60	11,2	8,00	16,8	12,0
01 59 0011	28	9,30	6,50	13,0	9,30	19,5	13,9
01 59 0012	30	10,6	7,40	14,8	10,6	22,2	15,9
01 59 0013	32	12,1	8,50	17,0	12,1	25,4	18,1
01 59 0014	34	13,7	9,60	19,2	13,7	28,7	20,5
01 59 0015	36	15,4	10,7	21,4	15,4	32,3	23,1
01 59 0016	38	17,1	12,0	24,0	17,1	35,9	25,6
01 59 0017	40	19,0	13,3	26,6	19,0	40,1	28,6
01 59 0018	42	21,0	14,7	29,4	21,0	44,1	31,5
01 59 0019	44	23,0	16,1	32,2	23,0	48,3	34,5

NB! Remember to apply the desired length when ordering


NB! Husk at påføre ønsket længde ved bestilling



6X36+IWRC AISI 316

- Stainless
- Steel core

Art. No.	dia. mm	kg/100 mtr	MBL ton
01 55 0000	10	40,9	5,70
01 55 0001	12	58,9	8,21
01 55 0002	14	80,2	11,22
01 55 0003	16	105	14,58
01 55 0004	18	133	18,46
01 55 0005	20	164	22,84
01 55 0006	22	198	27,64
01 55 0007	24	236	32,84
01 55 0008	26	276	38,55




6X36+IWRC AISI 316

- Rustfri
- Stålhjerte

6X36+IWRC

- Galvanized
- With steel core
- 1960 N/mm²

Art. No.*	Dia. mm	Kg/100mtr	MBL Ton	Art. No.*	Dia. mm	kg/100mtr	MBL Ton
01 02 0001	8	26,2	4,56	01 02 0021	30	368	64,0
01 02 0002	9	33,1	5,76	01 02 0022	32	419	72,9
01 02 0003	10	40,9	7,12	01 02 0023	34	473	82,3
01 02 0004	11	49,5	8,60	01 02 0024	36	530	92,2
01 02 0005	12	58,9	10,2	01 02 0025	38	591	103
01 02 0006	13	69,1	12,0	01 02 0026	40	654	114
01 02 0007	14	80,2	14,0	01 02 0027	42	721	125
01 02 0009	16	105	18,3	01 02 0028	44	792	138
01 02 0011	18	133	23,0	01 02 0030	48	942	164
01 02 0012	19	148	25,7	01 02 0031	51	1064	185
01 02 0013	20	164	28,5	01 02 0032	52	1110	193
01 02 0014	22	198	34,5	01 02 0033	56	1280	223
01 02 0016	24	236	41,0	01 02 0034	57	1329	231
01 02 0018	26	276	48,1	01 02 0035	60	1470	256
01 02 0020	28	321	55,8	01 02 0036	64	1675	291




*Other sizes available on request

*Andre størrelser muligt på forespørgsel

6X36+FC

- Galvanized
- Fiber core
- 1960 N/mm²

Art. No.*	Dia. mm	Kg/100m	MBL Ton	Art. No.*	Dia. mm	Kg/100mtr	MBL Ton
01 01 0001	8	23,5	4,22	01 01 0014	22	178	31,9
01 01 0002	9	29,7	5,34	01 01 0016	24	211	38,0
01 01 0003	10	36,7	6,60	01 01 0018	26	248	44,6
01 01 0004	11	44,4	7,99	01 01 0020	28	288	51,7
01 01 0005	12	52,8	9,50	01 01 0021	30	330	59,4
01 01 0006	13	62,0	11,1	01 01 0022	32	376	67,5
01 01 0007	14	71,9	13,0	01 01 0024	36	476	85,5
01 01 0009	16	94,0	16,9	01 01 0025	38	530	95,0
01 01 0011	18	119	21,4	01 01 0026	40	587	106,1
01 01 0013	20	147	26,4	01 01 0028	44	711	127



6X36+FC

- Galvaniseret
- Fiberhjerte
- 1960 N/mm²

* Other sizes available on request

* Andre størrelser muligt på forespørgsel


**6X36+IWRC compacted**

- Galvanized
- Steel core
- 1960 N/mm²

6X36+IWRC kompakt

- Galvaniseret
- Stålhjerte
- 1960 N/mm²

Art. No.	Dia. mm	Cross section mm.	Weight kg/mtr	MBL ton
01 06 0001	10	52	0,44	8,94
01 06 0002	11	64	0,54	10,91
01 06 0003	12	75	0,64	12,85
01 06 0004	13	89	0,76	15,3
01 07 0001	14	103	0,87	17,23
01 07 0002	15	116	0,98	19,48
01 07 0003	16	133	1,12	22,33
01 07 0004	17	152	1,29	25,60
01 07 0005	18	168	1,42	28,25
01 07 0006	19	189	1,60	31,72
01 08 0001	20	209	1,77	35,19
01 08 0002	22	254	2,15	42,73
01 08 0003	24	306	2,59	51,40
01 08 0004	26	363	3,08	60,99
01 08 0005	28	414	3,50	69,56
01 09 0001	30	477	4,05	80,17
01 09 0002	32	541	4,59	90,88
01 09 0003	34	614	5,21	103,22
01 09 0004	36	687	5,83	115,46
01 09 0005	38	765	6,50	128,62
01 09 0006	40	850	7,22	143,00
01 09 0007	42	928	7,88	156,06
01 09 0008	44	1032	8,77	173,50


Available in 2160 N/mm² on requestMuligt som 2160 N/mm² på forespørgsel**35X7 Compacted**

- Non-Rotating
- Galvanized
- Steel core
- RHOL

35X7 Kompakt

- Rotationsfri
- Galvaniseret
- Stålhjerte
- RHOL

Art. No.	Dia. mm	kg/100 mtr	MBL Ton 2160 N/mm ²
01 54 0200	8	32	6,28
01 54 0201	10	49	9,89
01 54 0202	11	60	11,73
01 54 0203	12	71	14,07
01 54 0204	13	83	16,52
01 54 0205	14	97	19,27
01 54 0207	16	126	25,09
01 54 0209	18	160	31,72
01 54 0210	19	178	35,39
01 54 0211	20	197	39,16
01 54 0212	22	239	47,43
01 54 0214	24	284	56,40
01 54 0215	26	333	66,70
01 54 0216	28	387	77,11
01 54 0218	32	505	100,36


Other sizes available on request
Optional with plasticAndre størrelser muligt på forespørgsel
Kan fås med plastik**4X36 + FC**

- Non-Rotating
- Fiber core

4X36 + FC

- Rotationsfri
- Fiberhjerte

Art. No.	Dia. mm	Kg/mtr	MBL Ton 1960 N/mm ²
01 21 0001	20	1,51	29,07
01 21 0002	22	1,88	35,19
01 21 0003	24	2,26	41,51
01 21 0004	26	2,56	48,65
01 21 0005	28	3,05	56,50
01 21 0006	30	3,49	64,77
01 21 0007	32	3,96	73,74
01 21 0008	34	4,37	83,23
01 21 0009	36	4,97	91,80



Wire rope grommet sling

Endeløse wirestropper

Art. No.	Grommet dia. mm	Rope dia. mm	WLL ton	Kg/mtr	Safety factor
01 34 0006	24	8	9,84	1,910	5,00
01 34 0007	27	9	12,47	2,410	5,00
01 34 0008	30	10	15,37	3,070	5,00
01 34 0009	36	12	22,25	4,420	5,00
01 34 0010	39	13	25,99	5,180	5,00
01 34 0011	42	14	30,18	6,010	5,00
01 34 0012	48	16	39,43	7,870	5,00
01 34 0013	54	18	49,78	9,970	5,00
01 34 0014	60	20	61,45	12,300	5,00
01 34 0015	66	22	76,28	14,850	4,88
01 34 0016	72	24	93,20	17,700	4,75
01 34 0017	78	26	112,76	20,770	4,61
01 34 0018	84	28	134,47	24,070	4,48
01 34 0019	96	32	186,59	31,420	4,22
01 34 0020	108	36	252,32	39,750	3,95
01 34 0021	114	38	290,60	42,280	3,82
01 34 0022	120	40	333,37	46,830	3,69
01 34 0023	126	42	381,12	51,660	3,56
01 34 0024	132	44	434,11	56,700	3,43
01 34 0025	144	48	560,75	67,480	3,16
01 34 0026	156	52	719,46	79,100	2,89

NB - Remember to apply the desired
working length when ordering
WLL based on metal core according
to: EN 13414-3


NB - Husk at påføre ønsket
arbejdslængde ved bestilling
WLL baseret på metal kerne i henhold
til: EN 13414-3



STD. Thimble

• Hot dip galvanized


Art. No.	Type	Size/str. mm	Dimensions - mm		Kg
			A	B	
01 35 0001	Standard	3	12	19	0,005
01 35 0002	Standard	4	13	21	0,005
01 35 0003	Standard	5	14	23	0,008
01 35 0004	Standard	6	16	25	0,02
01 35 0006	Standard	8	20	32	0,04
01 35 0007	Standard	10	24	38	0,04
01 35 0008	Standard	12	38	70	0,23

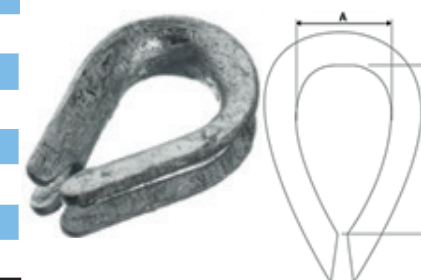

Heavy duty Thimble

• Hot dip galvanized

Art. No.	Type	Size/str. mm	A ton	Dimensions - mm		Kg
				B	C	
01 35 0211	Heavy Duty	14-16	44	83	108	0,34
01 35 0212	Heavy Duty	18-19	51	95	127	0,79
01 35 0213	Heavy Duty	20-22	57	108	140	0,79
01 35 0215	Heavy Duty	24-26	63	114	156	1,25
01 35 0218	Heavy Duty	28-32	73	130	178	1,82
01 35 0220	Heavy Duty	34-36	89	165	230	5,33
01 35 0222	Heavy Duty	38-42	102	203	286	7,72
01 35 0224	Heavy Duty	44 - 46	114	229	310	8,06
01 35 0225	Heavy Duty	48 - 52	152	305	384	11,35



Stainless thimble

• AISI 316

Art. No.	Dimensions - mm		
	Size	A	B
08 01 0001	3	9	15
08 01 0002	4	11	18
08 01 0003	5	14	20
08 01 0004	6	15	26
08 01 0006	8	18	29
08 01 0008	10	24	37
08 01 0009	12	29	50
08 01 0010	14	33	54
08 01 0011	16	37	64
08 01 0012	18	40	70
08 01 0013	20	45	75
08 01 0014	22	53	88
08 01 0015	24	58	92



STD Kovs


• Varmgalvaniseret

HD Kovs

• Varmgalvaniseret


Rustfri kovs

• AISI 316

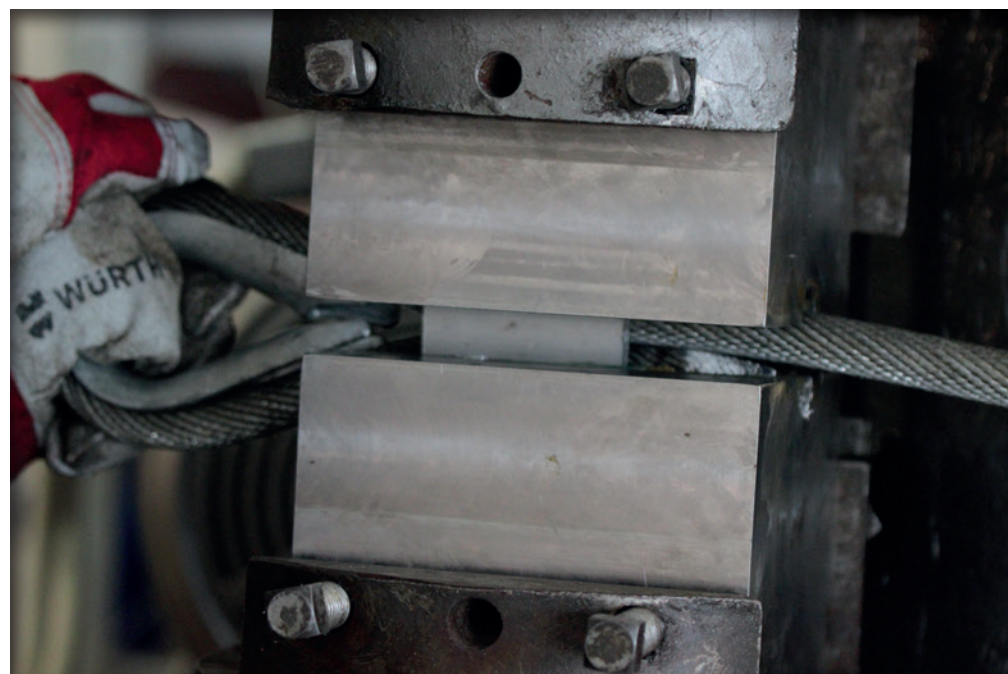**SECU wire grip**

- Galvanized
- Approved for lifting

Art. No.	Dimensions - mm					Weight Kg	Antal låse pr. øje
	Rope size	A	B	C	D		
01 50 0001	6	6	33	32	33	0,1	2
01 50 0002	8	8	33,5	34	34	0,15	2
01 50 0003	10	10	36	46	36	0,19	2
01 50 0004	12	12	47	56	47	0,34	2
01 50 0005	16	16	55	67	55	0,57	2
01 50 0006	20	20	63	89	63	0,8	2
01 50 0007	25	25	72	110	72	1,35	2
01 50 0008	35	35	94	160	94	4,1	2

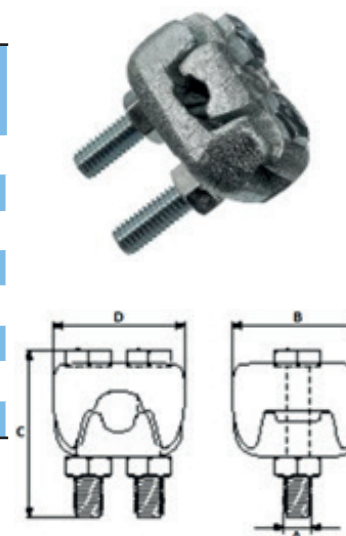**Wire rope grip DIN 741**

- Galvanized

Art. No.	Dimensions - mm				Weight Kg	Antal låse per. øje
	Rope size	A	B	C		
01 51 0001	3	3	20	4	0,01	3
01 51 0002	5	5	24	5	0,02	3
01 51 0003	6	6	28	5	0,02	3
01 51 0004	8	8	34	6	0,04	3
01 51 0005	10	10	42	8	0,07	3
01 51 0006	11	11	44	8	0,07	3
01 51 0007	13	13	55	10	0,13	3
01 51 0008	14	14	57	10	0,14	3
01 51 0009	16	16	63	12	0,21	5
01 51 0010	19	19	75	12	0,28	5
01 51 0011	22	22	85	14	0,4	5
01 51 0012	25	25	95	14	0,44	5
01 51 0013	28	28	110	16	0,66	5
01 51 0014	32	32	120	16	0,39	7
01 51 0015	38	38	140	16	1,04	7





Aluminum ferrules

- Maker: Talurit
- Type: T

Art. No.	Size	Art. No.	Size
0051-0000-T001	1	0051-0000-T018	18
0051-0000-T01,5	1,5	0051-0000-T020	20
0051-0000-T002	2	0051-0000-T022	22
0051-0000-T02,5	2,5	0051-0000-T024	24
0051-0000-T003	3	0051-0000-T026	26
0051-0000-T03,5	3,5	0051-0000-T028	28
0051-0000-T004	4	0051-0000-T030	30
0051-0000-T04,5	4,5	0051-0000-T032	32
0051-0000-T005	5	0051-0000-T034	34
0051-0000-T006	6	0051-0000-T036	36
0051-0000-T06,5	6,5	0051-0000-T038	38
0051-0000-T007	7	0051-0000-T040	40
0051-0000-T008	8	0051-0000-T042	42
0051-0000-T009	9	0051-0000-T044	44
0051-0000-T010	10	0051-0000-T046	46
0051-0000-T011	11	0051-0000-T048	48
0051-0000-T012	12	0051-0000-T050	50
0051-0000-T013	13	0051-0000-T052	52
0051-0000-T014	14	0051-0000-T054	54
0051-0000-T016	16	0051-0000-T056	56

Other sizes available on request

Andre str. på forespørgsel

Copper ferrules

- Maker: Talurit
- Type: TCU

Art. No.	Size	Art. No.	Size
0054-0000-TC01	1	0054-0000-TC09	9
0054-0000-TC1,5	1,5	0054-0000-TC10	10
0054-0000-TC02	2	0054-0000-TC11	11
0054-0000-TC2,5	2,5	0054-0000-TC12	12
0054-0000-TC03	3	0054-0000-TC13	13
0054-0000-TC3,5	3,5	0054-0000-TC14	14
0054-0000-TC04	4	0054-0000-TC16	16
0054-0000-TC4,5	4,5	0054-0000-TC18	18
0054-0000-TC05	5	0054-0000-TC20	20
0054-0000-TC06	6	0054-0000-TC22	22
0054-0000-TC6,5	6,5	0054-0000-TC24	24
0054-0000-TC07	7	0054-0000-TC28	28
0054-0000-TC08	8	0054-0000-TC30	30

Other sizes available on request

Andre str. på forespørgsel





Tubular thimble with gusset

- Optional with master link



Rørkovs med kile

- Option med ovalring

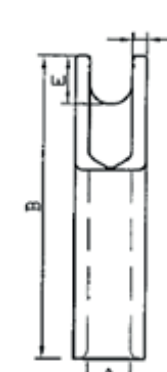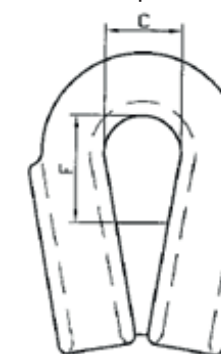


Art. No.	Dimensions - mm						Weight kg	For wire max.
	A	B	C	D	E	F		
14 29 0001	12	84	23	4,0	8	24	0,36	10
14 29 0002	15	95	27	5,0	10	31	0,52	12
14 29 0003	17	100	27	5,0	10	38	0,55	14
14 29 0004	19	112	32	5,0	12	46	0,65	16
14 29 0005	22	125	35	5,0	15	47	0,90	18
14 29 0006	25	150	45	6,3	16	61	1,26	22
14 29 0007	28	157	45	7,0	16	56	1,64	24
14 29 0008	30	170	47	7,0	18	68	2,02	25
14 29 0009	35	190	60	7,0	22	73	2,50	32
14 29 0010	40	212	70	9,0	36	80	3,70	36
14 29 0011	45	228	70	7,0	27	94	3,71	38
14 29 0012	50	255	75	7,0	35	97	4,65	42
14 29 0013	55	268	80	7,0	31	99	4,90	48
14 29 0014	60	270	100	7,0	37	120	-	54
14 29 0015	80	370	150	7,0	46	150	-	70

Available as galvanized


Alternativ som galvaniseret model

Solid thimble


- Cast iron
- Suitable for wire rope

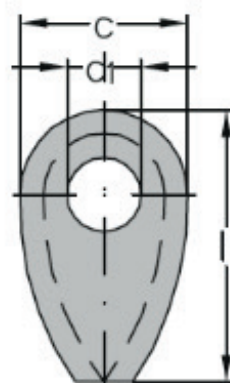

8-14 mm

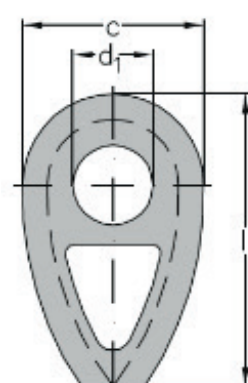

16-80 mm



Massiv kovs

- Støbejern
- Egnet til wire

Art. No.	Dimensions - mm						Weight kg	For wire max.
	A	B	C	D	E	F		
14 29 0001	12	84	23	4,0	8	24	0,36	10
14 29 0002	15	95	27	5,0	10	31	0,52	12
14 29 0003	17	100	27	5,0	10	38	0,55	14
14 29 0004	19	112	32	5,0	12	46	0,65	16
14 29 0005	22	125	35	5,0	15	47	0,90	18
14 29 0006	25	150	45	6,3	16	61	1,26	22
14 29 0007	28	157	45	7,0	16	56	1,64	24
14 29 0008	30	170	47	7,0	18	68	2,02	25
14 29 0009	35	190	60	7,0	22	73	2,50	32
14 29 0010	40	212	70	9,0	36	80	3,70	36
14 29 0011	45	228	70	7,0	27	94	3,71	38
14 29 0012	50	255	75	7,0	35	97	4,65	42
14 29 0013	55	268	80	7,0	31	99	4,90	48
14 29 0014	60	270	100	7,0	37	120	-	54
14 29 0015	80	370	150	7,0	46	150	-	70

Tolerance $\pm 5\%$

Remember to apply desired hole size when ordering

Tolerance $\pm 5\%$

Husk at påføre ønsket hul størrelse ved ordre


Closed spelter socket

- Cast steel
- Galvanized (Optional: painted)



Lukket wiresko

- Støbejern
- Galvaniseret (Option: malet)

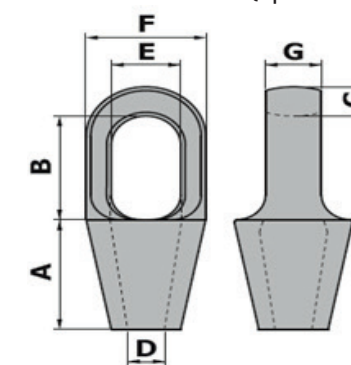


Art. No.	Type No.	Wire dia. mm	MBL ton	Dimensions - mm							Weight kg
				A	B	C	D	E	F	G	
01 39 0001	296	6 to 7	8	46	45	11	10	22	38	14	0,3
01 39 0002	297	8 to 10	12	54	52	14	13,5	24	44	17,5	0,5
01 39 0003	298	11 to 13	20	64	59	17	15	30	53	23	0,7
01 39 0004	299	14 to 16	25	76	65	21	18,5	36	67	26	1,3
01 39 0005	200	18 to 19	40	89	78	27	22,5	42	77	32	2,1
01 39 0006	201	20 to 22	55	101	90	33	26,8	50	92	38	3,6
01 39 0007	204	23 to 26	80	114	103	36	29,5	57	101	45	5,1
01 39 0008	207	27 to 30	100	127	116	39	34	65	114	51	7
01 39 0009	212	31 to 36	130	139	130	43	40	71	127	57	10,4
01 39 0010	215	37 to 39	160	152	155	51	44,5	80	140	63	15
01 39 0011	217	40 to 42	200	165	171	54	48	84	148	70	18,5
01 39 0012	219	43 to 48	250	190	198	55	53	95	171	76	27,5
01 39 0013	222	49 to 54	300	216	224	62	58,5	111	193	82	39,5
01 39 0014	224	55 to 60	375	229	248	73	68,5	125	219	92	51
01 39 0015	226	61 to 68	450	248	270	79	77,5	140	241	102	67
01 39 0016	227	69 to 75	500	279	286	79	83	159	273	124	96
01 39 0017	228	76 to 80	600	305	298	86	89	171	292	133	118
01 39 0018	229	81 to 86	650	330	311	95	95	184	311	146	142
01 39 0019	230	87 to 93	750	356	330	102	99	197	330	159	175
01 39 0020	231	94 to 102	900	381	356	108	110	216	362	178	230

Tolerance $\pm 5\%$

Other sizes on request

Tolerance $\pm 5\%$


Andre størrelser på forespørgsel

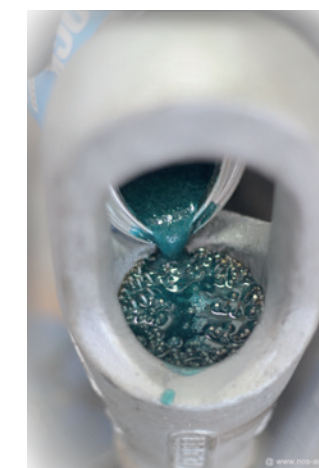



Open spelter socket

- Cast steel
- Galvanized (Optional: painted)
- With safety pin, nut and split

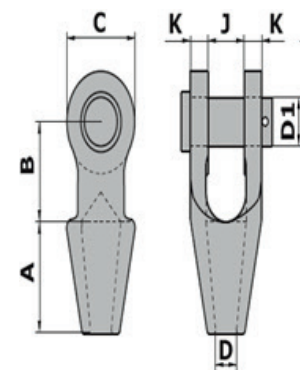


Åben wiresko

- Støbejern
- Galvaniseret (Option: malet)
- Med bolt, møtrik og split

Open wedge socket

- Cast steel
- Galvanized (Optional: painted)
- With safety pin, nut and split

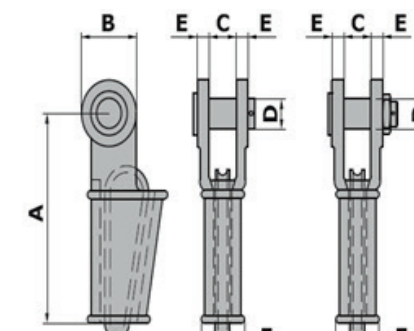

Kilewirelås

- Støbejern
- Galvaniseret (Option: malet)
- Med bolt, møtrik og split

Art. No.	Type No.	Wire dia. mm	MBL ton	Dimensions - mm							Weight kg
				A	B	C	D	D1	J	K	
01 40 0001	196	6 to 7	8	46	40	34	10	17,5	18	9	0,4
01 40 0002	197	8 to 10	12	54	45	40	13,5	20,6	20,6	11,2	0,8
01 40 0003	198	11 to 13	20	64	51	48	15	25,4	25,6	12,7	1,1
01 40 0004	199	14 to 16	25	76	63	56	18,5	30	32	14,5	1,9
01 40 0005	100	18 to 19	40	89	76	68	22,5	35	38	16,5	3,2
01 40 0006	104	20 to 22	55	101	89	80	26,8	41	45	20,5	5,3
01 40 0007	108	23 to 26	80	114	101	98	29,5	51	51	22,5	8,4
01 40 0008	111	27 to 30	100	127	114	110	34	57	57	25	11,3
01 40 0009	115	31 to 36	130	139	127	124	40	63	63	28	16
01 40 0010	118	37 to 39	160	152	162	140	44,5	70	76	30	23
01 40 0011	120	40 to 42	200	165	165	148	48	76	76	33,5	29
01 40 0012	125	43 to 48	250	191	178	170	53	89	89	39	43
01 40 0013	128	49 to 54	300	216	228	186	58,5	95	101	46	64
01 40 0014	130	55 to 60	375	229	254	210	68,5	108	113	53	85
01 40 0015	132	61 to 68	450	248	273	230	77,5	121	127	60	119
01 40 0016	135	69 to 75	500	279	279	240	83	127	133	73	159
01 40 0017	138	76 to 80	600	305	286	250	89	133	146	76	186
01 40 0018	140	81 to 86	650	330	300	275	95	140	159	79	227
01 40 0019	142	87 to 93	750	356	318	300	99	152	172	82	280
01 40 0020	144	94 to 102	900	381	343	336	110	178	191	89	375

Tolerance $\pm 5\%$
Other sizes on request

Tolerance $\pm 5\%$
Andre størrelser på forespørgsel

Art. No.	Type No.	Wire dia. mm	MBL ton	Dimensions - mm					Weight kg
				A	B	C	D	E	
01 41 0001	0,5	9 to 10	12	125	40	20,5	20,6	11	1,2
01 41 0002	1	11 to 13	20	156	48	25,6	25,4	12,7	2,3
01 41 0003	2	14 to 16	25	192	56	32	30	14,5	3,6
01 41 0004	3	18 to 19	40	232	68	38	35	16,5	6,3
01 41 0005	4	20 to 22	55	264	80	45	41	20,5	10,3
01 41 0006	5	24 to 26	80	312	100	51	51	22,5	16
01 41 0007	6	28	100	348	110	57	57	25	21,5
01 41 0008	7	32	120	384	124	63	63	28	30
01 41 0009	8	35	130	432	132	70	63	28	36
01 41 0010	9	38	160	468	140	76	70	30	50
01 41 0011	10	41	200	504	150	76	76	33	60
01 41 0012	11	44 to 48	250	576	170	89	89	39	90
01 41 0013	12	51	300	625	186	101	95	46	125
01 41 0014	13	56	375	696	210	113	108	53	175
01 41 0015	14	63	450	817	230	127	121	60	250
01 41 0016	15	75	600	912	250	146	133	76	400

Tolerance $\pm 5\%$

Tolerance $\pm 5\%$


CR socket

- Cast steel
- Galvanized (Optional: painted)



CR wiresko

- Støbejern
- Galvaniseret (Option: malet)

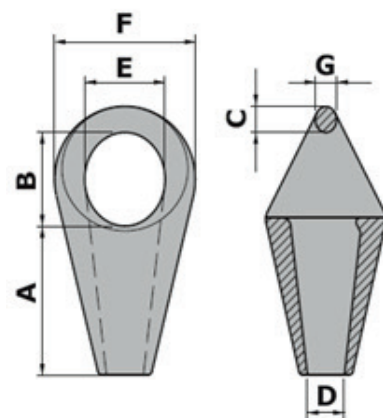

Art. No.	Type No.	Wire dia. mm	MBL ton	Dimensions - mm							Weight kg
				A	B	C	D	E	F	G	
0142 0002	517	38 to 42	160	162	103	44	46	92	152	40	11
0142 0003	519	43 to 48	200	193	123	53	53	110	176	48	16
0142 0004	522	49 to 54	250	210	140	58	58,5	125	200	52	22
0142 0005	524	55 to 60	320	230	157	65	68	140	226	58	31
0142 0006	526	61 to 68	400	250	174	75	76	156	250	66	42
0142 0007	527	69 to 75	500	280	191	80	80	171	275	70	54
0142 0008	528	76 to 80	600	309	196	86	89	180	290	76	70
0142 0009	529	81 to 86	700	332	211	100	94	188	304	90	85
0142 0010	530	87 to 93	800	360	220	105	99	210	332	95	118
0142 0011	531	94 to 102	900	375	235	112	110	220	366	101	142
0142 0012	533	108 to 115	1000	420	270	126	128	240	405	112	180

Tolerance ± 5%

Tolerance ± 5%




Super reeve connector socket

- With safety pin, nut and split
- Painted blue (hot dip galvanized is optional)
- EN 10204-2.1 declaration of conformity
- EN 10204-3.1 material certificate



Super wiresko for mobilkran

- Med bolt, møtrik og split
- Malet blå (varmgalvaniseret som option)
- EN 10204-2.1 overensstemmelseserklæring
- EN 10204-3.1 materiale certifikat

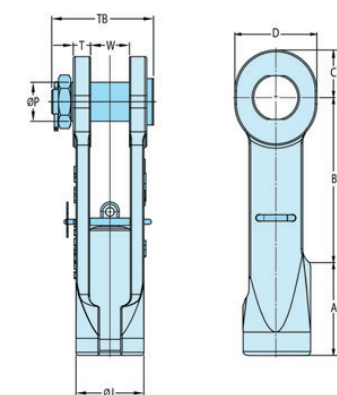

Art. No.	Wire dia. mm	MBL ton	Dimensions - mm													Weight kg
			A	B	C	ØH	ØP	T	W	D	ØD	ØJ	L	TB	TL	
0168 0001	13 - 16	25	85	133	32	19	30	14	32	58	32	56	98	96	250	3,1
0168 0002	16 - 19	40	90	160	40	22	35	16	38	70	40	65	114	107	290	4,8
0168 0003	20 - 22	55	107	184	45	26	41	19	44	80	44	77	130	123	336	8
0168 0004	23 - 26	75	115	211	60	31	50	22	51	104	52	88	142	138	386	12
0168 0005	27 - 29	90	140	215	65	34	57	25	57	114	58	96	159	160	420	16
0168 0006	30 - 32	125	150	260	73	36	63	28	63	126	64	110	177	165	483	23
0168 0007	33 - 36	125	170	260	73	40	64	28	69	126	68	114	197	185	503	25


Super reeve connector swivel socket

- With safety pin, nut and split
- Quenched and tempered cast steel
- Galvanized
- EN 10204-2.1 declaration of conformity
- EN 10204-3.1 material certificate




Super svirvel wiresko

- Med bolt, møtrik og split
- Støbt og hærdet stål
- Galvaniseret
- EN 10204-2.1 overensstemmelseserklæring
- EN 10204-3.1 materiale certifikat

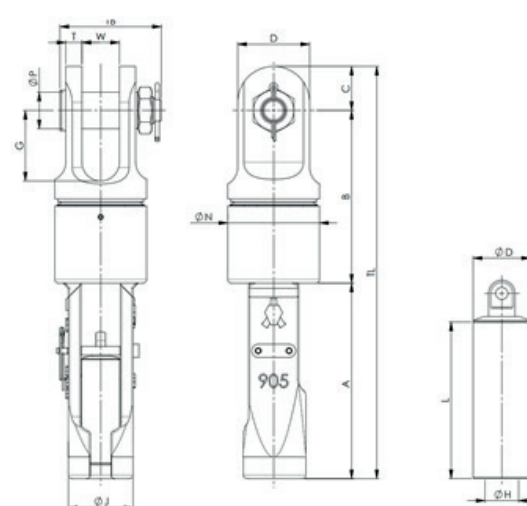

Snatch block S series with shackle

- Painted
- Sheave with bronze bushing



Kasteblok S serie med sjækel

- Malet
- Skive med bronze bøsning

Art. No.	WLL ton	Wire dia. mm	Bearing/ leje type	Dimensions - mm					Weight kg
				A	B	C	D	E	
01 45 0001	2	7-9	BB	75	60	82	70	286	4
01 45 0002	4	10-12	BB	115	90	120	70	345	6
01 45 0003	4	16-19	BB	150	120	160	70	399	14
01 45 0004	8	19-22	RB	150	120	160	93	475	15
01 45 0005	8	19-22	RB	200	165	210	93	528	16
01 45 0006	10	24-26	RB	250	205	260	115	679	38
01 45 0007	12	24-26	RB	250	205	260	115	679	42
01 45 0008	12	24-26	RB	300	255	310	133	767	56
01 45 0009	15	22-24	RB	200	160	210	102	663	24
01 45 0010	15	24-26	RB	300	255	310	133	884	65
01 45 0011	22	28-32	RB	355	300	365	140	952	90
01 45 0012	22	28-32	RB	400	350	415	140	1019	108
01 45 0013	22	28-32	RB	450	380	465	180	1088	120
01 45 0014	30	28-30	RB	300	245	310	193	1023	125
01 45 0015	30	32-35	RB	400	300	415	155	1126	135
01 45 0016	30	32-35	RB	500	440	514	162	1256	210
01 45 0017	35	32-35	RB	350	280	365	193	1058	130
01 45 0018	50	46-50	RB	600	500	625	275	1525	418

Option: With hook
Safety factor 4:1

Option: Med krog
Sikkerhedsfaktor 4:1

Art. No.	Wire dia. mm	MBL ton	Dimensions - mm															Weight kg
			A	B	C	ØH	ØP	T	W	G	D	ØD	ØJ	N	L	TB	TL	
01 69 0001	13-16	25	182	157	32	19	30	14	32	60	58	32	56	76	98	96	371	7
01 69 0002	16-19	40	208	186	40	22	35	16	38	70	70	40	65	93	114	107	434	11
01 69 0003	20-22	55	238	208	45	26	41	19	44	80	80	44	77	105	130	123	491	17
01 69 0004	23-26	75	266	235	60	31	50	22	51	96	98	52	88	125	142	138	561	26
01 69 0005	27-29	90	290	262	65	34	57	25	57	107	108	58	96	135	159	160	617	34
01 69 0006	30-32	125	327	292	73	36	63	28	63	118	120	64	110	150	177	165	692	49

Stainless rope block w/
swivel eye

- DIN 304

Art. No.	MBL ton	Fits rope dia. mm	No. Sheaves	Sheave Ø - mm	Weight kg
08 12 0003	2,0	8	1	25	0,125
08 12 0004	2,3	10	1	32	0,176
08 12 0005	3,4	12	1	50	0,400
08 12 0006	2,0	8	2	25	0,185
08 12 0007	2,3	10	2	32	0,255
08 12 0008	3,4	12	2	50	0,620



Single block w/Nylon sheave

- Galvanized
- Suited for fiber ropes

Art. No.	Dimensions - mm					Break load kg	Weight kg
	Size	A	B	C	D		
05 17 0001	5	5	15	50	10	550	0,024
05 17 0002	6	6	20	60	11	600	0,041
05 17 0003	7	7	25	70	12	800	0,056
05 17 0004	8	8	30	80	13	900	0,083
05 17 0005	9	9	40	93	14	1100	0,127
05 17 0006	12	12	50	113	16	1200	0,197



Double block w/Nylon sheave

- Galvanized
- Suited for fiber ropes

Art. No.	Dimension - mm					Break load kg	Weight kg
	Size	A	B	C	D		
05 18 0001	7	7	25	70	12	400	0,089
05 18 0002	8	8	30	80	13	400	0,132
05 18 0003	9	9	40	105	16	500	0,272
05 18 0004	12	12	50	117	16	500	0,412



Wire block - Single sheaved

- Galvanized
- 1 & 2 ton = sealed ball bearings
- 3, 4 & 6 ton = Greaseable ball bearing
- Top fitting = Swivel eye

Art. No.	WLL ton	WLL top fit. ton	Test load ton	Dimensions - mm				Weight kg
				A	B	D	Max wire	
01 61 0001	1	2	4	163	22	80	16	1,7
01 61 0002	2	4	8	195	24	110	18	3,1
01 61 0003	3	6	8	257	28	150	20	6,4
01 61 0004	4	8	16	330	35	185	22	11,1
01 61 0005	6	12	24	365	42	210	24	17



Wire block - Double sheaved

- Galvanized
- 1 & 2 ton = sealed ball bearings
- 3, 4 & 6 ton = Greaseable ball bearing
- Top fitting = Swivel eye

Art. No.	WLL ton	WLL top fit. ton	Test load ton	Dimensions - mm					Weight kg
				A	B	C	D	Max wire	
01 62 0001	1	2	4	187	22	16	80	16	3,1
01 62 0002	2	4	8	224	24	22	110	18	5,2
01 62 0003	3	6	8	296	28	31	150	20	11
01 62 0004	4	8	16	385	35	40	185	22	19
01 62 0005	6	12	24	425	42	40	210	24	27,8



Wire block - Triple sheaved

- Galvanized
- 1 & 2 ton = sealed ball bearings
- 3, 4 & 6 ton = Greaseable ball bearing
- Top fitting = Swivel eye

Art. No.	WLL ton	WLL top fit. ton	Test load ton	Dimensions - mm					Weight kg
				A	B	C	D	Max wire	
01 63 0001	1	2	4	187	22	16	80	16	4,5
01 63 0002	2	4	8	224	24	22	110	18	7,5
01 63 0003	3	6	8	296	28	31	150	20	15,8
01 63 0004	4	8	16	385	35	40	185	22	27,4
01 63 0005	6	12	24	425	42	40	210	24	40



Wireblok - Enkelt skivet

- Galvaniseret
- 1 & 2 ton = Lukkede kuglelejer
- 3, 4 & 6 ton = Smørbare kuglelejer
- Top fitting = Svirvel øje

Wireblok - Dobbelt skivet

- Galvaniseret
- 1 & 2 ton = Lukkede kuglelejer
- 3, 4 & 6 ton = Smørbare kuglelejer
- Top fitting = Svirvel øje

Wireblok - Tredobbelt skivet

- Galvaniseret
- 1 & 2 ton = Lukkede kuglelejer
- 3, 4 & 6 ton = Smørbare kuglelejer
- Top fitting = Svirvel øje

Stainless rope block w/
swivel eye

- DIN 304

Rustfri tovværksblok m.
svirveløje

- DIN 304

Art. No.	MBL ton	Fits rope dia. mm	No. Sheaves	Sheave Ø - mm	Weight kg
08 12 0003	2,0	8	1	25	0,125
08 12 0004	2,3	10	1	32	0,176
08 12 0005	3,4	12	1	50	0,400
08 12 0006	2,0	8	2	25	0,185
08 12 0007	2,3	10	2	32	0,255
08 12 0008	3,4	12	2	50	0,620



Single block w/Nylon sheave

- Galvanized
- Suited for fiber ropes

Art. No.	Dimensions - mm					Break load kg	Weight kg
	Size	A	B	C	D		
05 17 0001	5	5	15	50	10	550	0,024
05 17 0002	6	6	20	60	11	600	0,041
05 17 0003	7	7	25	70	12	800	0,056
05 17 0004	8	8	30	80	13	900	0,083
05 17 0005	9	9	40	93	14	1100	0,127
05 17 0006	12	12	50	113	16	1200	0,197



Double block w/Nylon sheave

- Galvanized
- Suited for fiber ropes

Art. No.	Dimension - mm					Break load kg	Weight kg
	Size	A	B	C	D		
05 18 0001	7	7	25	70	12	400	0,089
05 18 0002	8	8	30	80	13	400	0,132
05 18 0003	9	9	40	105	16	500	0,272
05 18 0004	12	12	50	117	16	500	0,412



Rope tensioning clip

- Galvanized
- Size 4 -10 with round hole
- Size 16 - 38 with oval hole



Frøllår

- Galvaniseret
- Str. 4 - 10 med rundt hul
- Str. 16 - 38 med ovalt hul

Art. No.	Nominal size	Rope Ø mm	Rope cross section				Closed	h mm Open	Opening	l mm	w mm	Weight kg
			mm ²	b mm	c mm	d mm						
01 75 0001	4	1 - 4	1 - 16	36	15	19	47	51	6,5	124	19	0,3
01 75 0002	8	3 - 8	6 - 35	47	21	20	76	82	10	169	20	0,9
01 75 0003	10	5 - 10	16 - 70	44	24	18	80	88	12	195	18	1,1
01 75 0004	16	8 - 16	50 - 150	54	25	30	83	97	19	245	39	1,8
01 75 0005	26	12 - 26	95 - 400	62	31	29	107	130	26	265	38	3,5
01 75 0006	38	20 - 38	240 - 800	62	36	29	126	153	40	286	38	6,5

Cable grips

- Galvanized
- Optional with thimble (soft eye model), with 2 eyes and as lace-up model

Soft eye / Blødt øje model:

Art. No.	Cable dia. mm	Length	Break load in kN/ton
01 53 0001-1	8-15	1250 - 1500	5,12 / 0,52
01 53 0002-1	15-20	1250 - 1500	6,93 / 0,71
01 53 0003-1	20-30	1250 - 1500	8,67 / 0,88
01 53 0004-1	30-40	1250 - 1500	10,40 / 1,06
01 53 0005-1	40-50	1250 - 1500	21,36 / 2,18
01 53 0006-1	50-60	1250 - 1500	21,36 / 2,18
01 53 0007-1	60-70	1250 - 1500	28,48 / 2,90
01 53 0008-1	70-80	1250 - 1500	28,48 / 2,90
01 53 0009-1	80-90	1250 - 1500	45,60 / 4,65

Also available in other sizes

Er tilgængelig i flere størrelser

Open ended / Åbne ender:

Art. No.	Cable dia. mm	Length	Break load in kN/ton
01 53 0101-1	6-8	1250 - 1500	3,60 / 0,37
01 53 0102-1	8-10	1250 - 1500	3,60 / 0,37
01 53 0103-1	10-15	1250 - 1500	5,12 / 0,52
01 53 0104-1	15-20	1250 - 1500	6,93 / 0,71
01 53 0105-1	20-30	1250 - 1500	8,67 / 0,88
01 53 0106-1	30-40	1250 - 1500	10,40 / 1,06
01 53 0107-1	40-50	1250 - 1500	21,36 / 2,18
01 53 0108-1	50-60	1250 - 1500	21,36 / 2,18
01 53 0109-1	60-70	1250 - 1500	28,48 / 2,90

Also available in other sizes

Er tilgængelig i flere størrelser



Wirelock

- 2 component cold hardening product
- Approved by AT, Lloyd's etc.
- Handles shocks and impacts

Art. No.	Content in liters
01 60 0001	0,25
01 60 0002	0,50
01 60 0003	1,00
01 60 0004	2,00
01 60 0005	3,00



Wire rope grease - Fluid

- EP additives
- High corrosion and wear protection
- Very good saltwater and weather resistance
- Extends the life span of the wire rope
- Service temperature -25 °C to +80 °C

Art. No.	Content in liters
01 66 0102	20 (canister)

Other applications:

Open gears, wire winches, screws, roller- and gliding bearings, ship cranes, offshore constructions, lifts, construction parts for ship building, excavators etc.

Wirefedt - Flydende

- EP additive
- Fremragende korrosionsbeskyttelse
- Høj beskyttelse mod saltvand og andre vejrforhold
- Forlænger levetiden på wiren
- Service temperatur -25 °C til +80 °C



Wire rope oil

- Excellent wetting and penetration properties
- Conserves and protects against corrosion
- Outstanding for use in dusty environments
- Service temperature -20 °C to +100 °C

Art. No.	Content in liters
01 67 0002	20 (canister)

Application:

Protection of all kinds of wire ropes, gears, springs, tools, screws, bolts etc. against corrosion

Wireolie

- Fremragende vædnings- og indtrængningsevne
- Konserverer og beskytter mod korrosion
- Fremragende til brug i støvholdige miljøer
- Service temperatur -20 °C til +100 °C



Applikation:


Beskyttelse af alle typer wirer, gear, fjedre, værktøj, skruer, bolte osv. mod korrosion.

DIN partner indenfor lovpligtige eftersyn

Vores dygtige service teknikere rykker ud og tester og efterser udstyr uafhængigt af mærke og fabrikant

Vi udfører lovpligtige eftersyn på:

Løfte- og surringsgrej



Hejseredskaber og spil




Kraner



Faldsikringsudstyr



Stiger

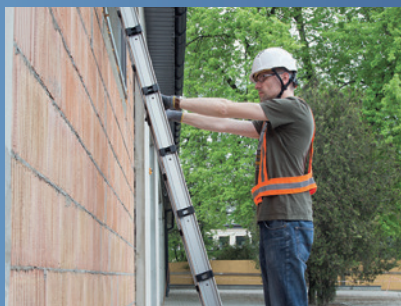

Pallereoler



Kontakt os for et uforpligtende tilbud
Tlf. 7669 7070 - Email. sales@nos-as.dk

Vi er autoriseret af Søfartsstyrelsen til at lave eftersyn på
hejsemidler og lossegrej – kompetent person kategori B.
Vores service teknikere er certificeret af Kranbranchen.