


Starter kit

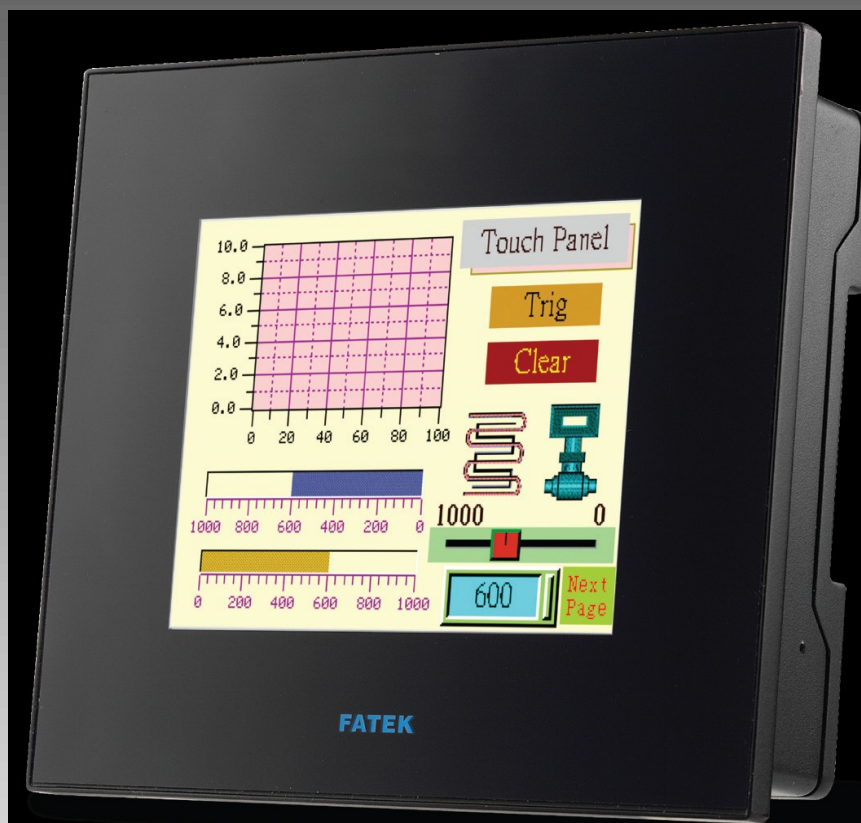

BESTÅENDE AF

FV035ST-C10: HMI panel, 3,5" STN display, 320 * 240, 256 color, Touch. 2,5MB user memory. Serial interface. No RTC and battery backup memory.

PANELMASTER: Programming software for FATEK panels

NU KUN

995,-

Kun 1 sæt pr. firma

Kabeltegnig til CA-FBs-F-D downloadkabel medfølger.

Priser er i DKK

Kattedamsvej 36, 9440 Aabybro
www.smartdk.com

Smart

Automation
Keeps you in control

Main phone: +45 77 34 99 60
info@smartdk.com


Starter kit

FV035ST-C10

Product specification

Model	FV035ST-C10	
Size	3.5"	
Display Type	Color STN LCD	
Resolution	320 x 240 Pixels	
Contrast Adjustment	16 adjustable by touch screen function	
Backlight	LED backlight	
Touch Screen	Type	Digital Resistor Membrane
	Resolution	1024*1024
Power Supply	24VDC±10% Isolation : Consumption 10W less	
CPU	RISC ARM 32Bit CPU	
System Memory	2M Bytes	
System Working Memory	512K Bytes)	
Battery Backup Memory	--	
Communication Port	COM1/9pin : RS232/RS422/RS485 COM2/Terminal 4Pin : RS422/RS485	
Expansion Interface Card	Not Support	
Web Comm. Port	Yes(N type)	
Panel Protection	IP65 / NEMA 4	
Storage Temperature	-20°~ 60°	
Operation Temperature	0°~ 50°(E)	
Humidity	10%~90%(non-dewing environment : 39℃ below)	
Shakiness	10 to 55Hz (X, Y, Z direction 1G · 30 min. vibrating testing)	
EMI	Complies with FCC Part 15 Class B	
CE	Complies with EN50081-2 and EN50082-2 standards	
Water Prove	NEMA4/IP65	
Certificate	CE · FCC	
Measurement(WxHxD mm)	119.0 x 99.0 x 42.0	
Hole Size (W x H mm)	109.5 x 89.5	
Net Weight (K.G)	0.26 KG	
Consumption	3W	

Dimensions

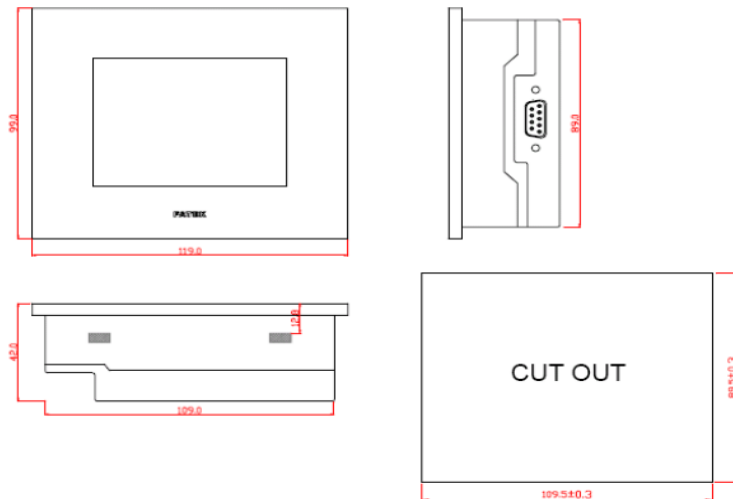

Vi forbeholder os retten til at ændre specifikationerne uden nogen form for varsel