



Fascinating Electrotechnics

Panel Mount Jacks

- USB
- FW6
- RJ45
- HDMI
- ...

Index

Rontron-R-Juwel Jacks

>> 01	- USB	page 03 - 06
	- FireWire	page 06 - 07
	- RJ45	page 07
	- PS2	page 08
	- SVHS	page 08
	- HDMI	page 08
	- Jack Plugs	page 08 - 09
	- Accessories	page 10 - 11

Rontron-Q-Juwel Jacks

>> 02	- USB	page 13
	- FireWire	page 14
	- RJ45	page 14
	- Accessories	page 15

Oktron-Juwel Jacks


>> 03	- USB	page 17
-------	-------	---------

Quartron-Juwel Jacks

>> 04	- VGA	page 19
	- RS232	page 19

For more details, please refer to www.schlegel.biz or to our product catalogue.

Cutout Dimensions

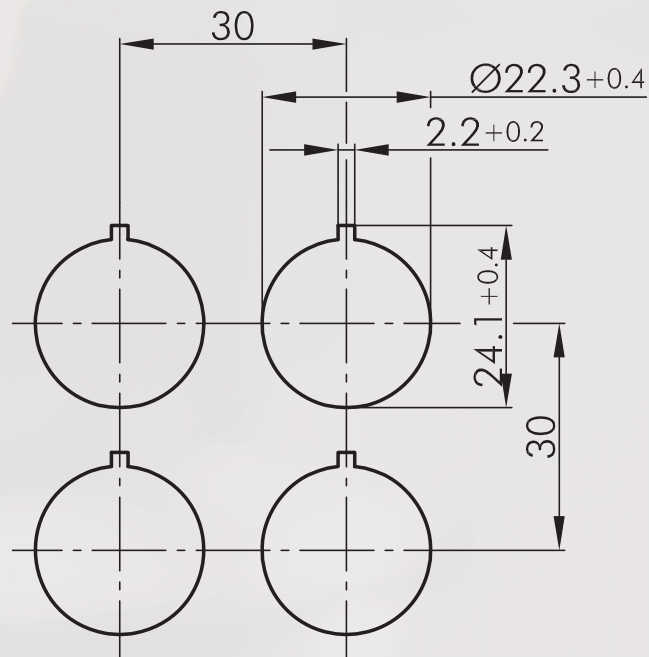

Index

About Us

Control Units

→ Actuators

Bus Technology


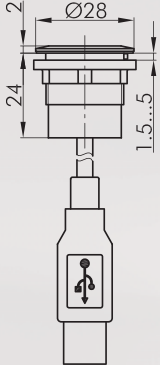










Enclosures

Limit Switches

Pedal Switches

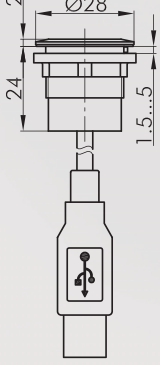Terminal Blocks

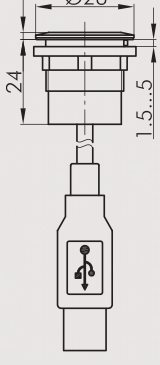Panel Mount Jacks

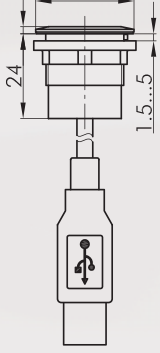Illustration	Dimensions	Description	Type
		<p>USB Jack front: USB jack type A</p> <p>rear: USB2.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel silver-coloured </p>	RRJ_USB
		<p>USB Jack front: USB jack type A</p> <p>rear: USB2.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel stainless steel, polished </p>	RRJVA_USB
		<p>USB3.0 Jack front: USB jack type A</p> <p>rear: USB3.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel silver-coloured </p>	RRJ_USB3
		<p>USB3.0 Jack front: USB jack type A</p> <p>rear: USB3.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel stainless steel, polished </p>	RRJVA_USB3

Index

About Us

Control Units

→ Actuators

Bus Technology

Enclosures

Limit Switches

Pedal Switches

Terminal Blocks


Panel Mount Jacks

Illustration

Dimensions

Description

Type



USB Jack


front:
USB jack type A

rear:
USB2.0 cable (length 100 cm) with jack housing, 5 poles (spacing 2.54 mm)
for direct connection to a motherboard

other lengths on request
front bezel silver-coloured



RRJ_USB-100CM_673



Dual USB Jack


front:
2x USB jack type A

rear:
2x USB2.0 cable (length 60 cm) with plug type A

other lengths on request
front bezel silver-coloured



RRJ_2USB



Dual USB Jack


front:
2x USB jack type A

rear:
2x USB2.0 cable (length 60 cm) with plug type A

other lengths on request
front bezel stainless steel, polished



RRJVA_2USB



USB Jack


front:
USB jack type A

rear:
USB jack type A

front bezel silver-coloured



RRJ_USB_AA



USB Jack

front:
USB jack type A

rear:
USB jack type A

front bezel stainless steel, polished



RRJVA_USB_AA

Index

About Us

Control Units

Bus Technology

Enclosures

Limit Switches

Pedal Switches

Terminal Blocks

→ Actuators

Panel Mount Jacks

Illustration	Dimensions	Description	Type
		USB3.0 Jack pinout 1:1 front: USB jack type A rear: USB jack type A front bezel	silver-coloured RRJ_USB3_AA
		USB3.0 Jack pinout 1:1 front: USB jack type A rear: USB jack type A front bezel	stainless steel, polished RRJVA_USB3_AA
		USB3.0 Jack Pinout: twisted data line front: USB jack type A rear: USB jack type A front bezel	silver-coloured RRJ_USB3_AA_633
		USB3.0 Jack Pinout: twisted data line front: USB jack type A rear: USB jack type A front bezel	stainless steel, polished RRJVA_USB3_AA633
		USB Jack front: USB jack type A rear: USB jack type B front bezel	silver-coloured RRJ_USB_AB
		USB Jack front: USB jack type A rear: USB jack type B front bezel	stainless steel, polished RRJVA_USB_AB


Panel Mount Jacks

Illustration

Dimensions

Description

Type




USB Jack
front:
USB jack type B

rear:
USB jack type A
front bezel

silver-coloured



RRJ_USB_BA




USB Jack
front:
USB jack type B

rear:
USB jack type A
front bezel

stainless steel, polished



RRJVA_USB_BA




USB Jack
front:
USB jack type B

rear:
USB jack type B
front bezel

silver-coloured



RRJ_USB_BB




USB Jack
front:
USB jack type B

rear:
USB jack type B
front bezel

stainless steel, polished



RRJVA_USB_BB




USB Jack
front:
USB jack type B

rear:
USB2.0 cable (length 50 cm) with plug type B
front bezel

silver-coloured



RRJ_USB_BB_50CM



FireWire Jack
front:
FireWire jack

rear:
FireWire jack
front bezel

silver-coloured



RRJ_FW6_STB

Index

About Us

Control Units

→ Actuators

Bus Technology
















Enclosures

Limit Switches

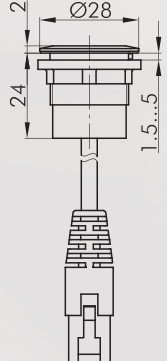Pedal Switches

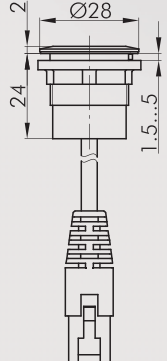Terminal Blocks

Panel Mount Jacks

Illustration	Dimensions	Description	Type
		<p>FireWire Jack front: FireWire jack</p> <p>rear: FireWire jack front bezel stainless steel, polished </p>	RRJVA_FW6_STB
		<p>RJ45 Jack front: RJ45 jack with screen</p> <p>rear: 60 cm cable screened with RJ45 connector front bezel silver-coloured </p>	RRJ_RJ45
		<p>RJ45 Jack front: RJ45 jack with screen</p> <p>rear: 60cm cable with screened RJ45 connector front bezel stainless steel, polished </p>	RRJVA_RJ45
		<p>RJ45 Jack front: RJ45 jack with screen</p> <p>rear: RJ45 jack with screen front bezel silver-coloured </p>	RRJ_RJ45_STB
		<p>RJ45 Jack front: RJ45 jack with screen</p> <p>rear: RJ45 jack with screen front bezel stainless steel, polished </p>	RRJVA_RJ45_STB

Index

About Us

Control Units

→ Actuators

Bus Technology

Enclosures

Limit Switches

Pedal Switches

Terminal Blocks


Panel Mount Jacks

Illustration

Dimensions

Description

Type



PS2 Jack


front:
PS2 jack

rear:
PS2 cable (length 200 cm) with PS2 plug

other lengths on request
front bezel silver-coloured



RRJ_PS2_200CM



SVHS Jack


front:
SVHS jack

rear:
SVHS cable (length 200 cm) with SVHS plug

other lengths on request
front bezel silver-coloured



RRJ_SVHS_200CM



HDMI Jack


front:
HDMI jack

hinten:
HDMI jack

front bezel silver-coloured



RRJ_HDMI_STB



2.5 mm Jack Plug


front:
2.5 mm jack socket (TRS)

rear:
cable (length 200 cm) with 2.5 mm jack plug

other lengths on request
front bezel silver-coloured



RRJ_KL2,5_200CM



2.5 mm Jack Plug

front:
2.5 mm jack socket (TRS)

rear:
cable length 200 cm) with 2.5 mm jack plug

other lengths on request
front bezel stainless steel, polished



RRJVA_KL2,5_200

Index

About Us

Control Units

Bus Technology


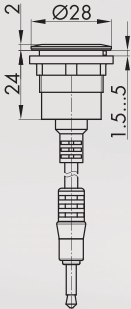










Enclosures

Limit Switches

Pedal Switches

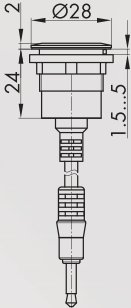Terminal Blocks

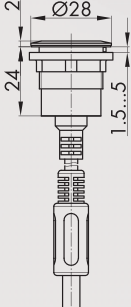Panel Mount Jacks

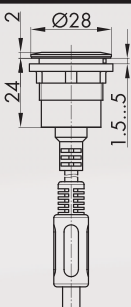Illustration	Dimensions	Description	Type
		<p>3.5 mm Jack Plug front: 3.5 mm jack socket (TRS)</p> <p>rear: cable (length 200 cm) with 3.5 mm jack plug</p> <p>other lengths on request front bezel silver-coloured </p>	RRJ_ KL3,5_200CM
		<p>3.5 mm Jack Plug front: 3.5 mm jack socket (TRS)</p> <p>rear: cable length 200 cm) with 3.5 mm jack plug</p> <p>other lengths on request front bezel stainless steel, polished </p>	RRJVA_ KL3,5_200
		<p>6.3 mm Jack Plug front: 6.3 mm jack socket (TRS)</p> <p>rear: cable (length 200 cm) with 6.3 mm jack plug</p> <p>other lengths on request front bezel silver-coloured </p>	RRJ_ KL6,3_200CM
		<p>6.3 mm Jack Plug front: 6.3 mm jack socket (TRS)</p> <p>rear: cable (length 200 cm) with 6.3 mm jack plug</p> <p>other lengths on request front bezel stainless steel, polished </p>	RRJVA_ KL6,3_200

Ø 30.5 mm

Accessories for Actuators

Illustration

Dimensions

Description

Type

IP69K



Robust Aluminium Protection Cap

- captive lid, threadable
- suitable for all jacks of the Rontron-R-Juwel series
- colour silver-coloured



SDAL22RR

IP40



Lead-sealable Protective Lid

- from -30 °C to +70°C
- colour transparent



KDP22RR

IP65
IP67



Lead-sealable, robust Protective Lid

- colour transparent



KDPR22RR

IP67



Protective Lid made of TPE

- from -50 °C to +100°C
- colour black



AK22RRSW

IP65



LED Light Ring for status indication or additional illumination

- for an additional light signal
- rated voltage: 24V AC/DC
- rated current: 25 ... 35 mA (DC)
- 30.5 mm mounting aperture
- Connection: for JST plug ZHR-3

delivery without actuator

- LED colour blue
- yellow
- white
- red
- green




LR22K_24B

LR22K_24Y

LR22K_24W

LR22K_24R

LR22K_24G



Connection Cable

- with open end, to connect the LED light rings to a voltage supply source,
- length approx. 80 cm, cross section 0.14 mm²

VK_JST3_014

Index

About Us

Control Units

→ Actuators

Bus Technology


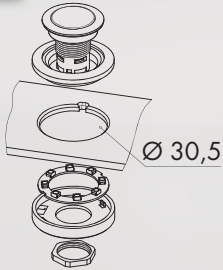


Enclosures

Limit Switches


Pedal Switches

Terminal Blocks

Accessories for Actuators

Illustration	Dimensions	Description	Type
 		<p>RGB LED Light Ring for status indication or illumination</p> <ul style="list-style-type: none"> - as an additional light signal - one-piece ring (360°) - rated voltage 24V AC (half-wave rectifier)/DC - up to 16.7 m colours are possible (colour mixing via PWM signal) <p>LED colour red/green/blue</p>	LR22K_24RGB
		<p>Connection Cable for RGB-LED Light Ring</p> <p>with open end, to connect the RGB-LED light rings to a voltage supply source, length approx. 80 cm, cross section 0.14 mm²</p>	VK_LRR22_RGB
		<p>Mounting Tool</p> <p>with torque limitation for the series QUARTEX-R(-JUWEL), KOMBITAST-R-JUWEL, RONDEX, RONDEX-M, RVA, DUX-Basic, SHORTRON, jacks of the RONTRON-R/-Q-JUWEL series</p>	S22

Cutout Dimensions

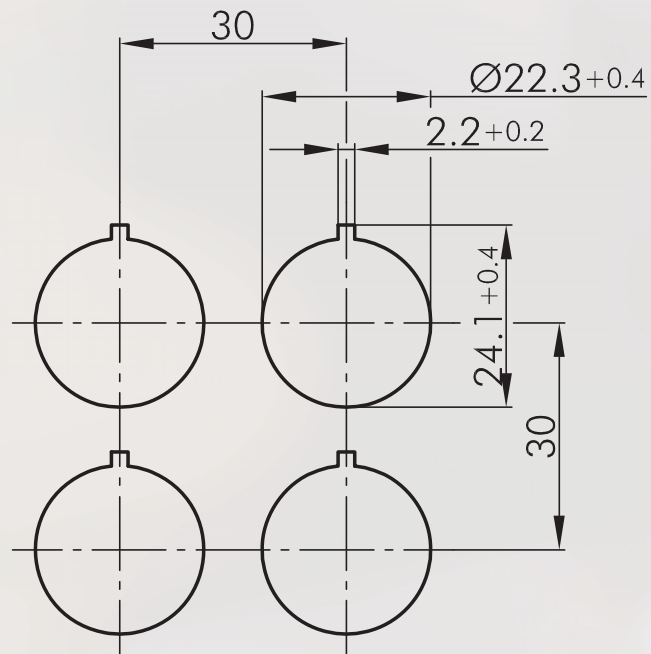

Index

About Us

Control Units

→ Actuators

Bus Technology


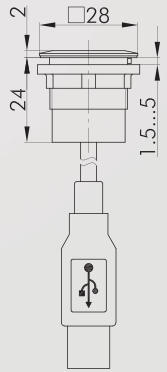










Enclosures

Limit Switches

Pedal Switches

Terminal Blocks

Panel Mount Jacks

Illustration	Dimensions	Description	Type
		<p>USB Jack front: USB jack type A</p> <p>rear: USB2.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel silver-coloured</p>	RQJ_USB
		<p>USB Jack front: USB jack type A</p> <p>rear: USB jack type A front bezel silver-coloured</p>	RQJ_USB_AA
		<p>USB3.0 Jack front: USB jack type A</p> <p>rear: USB jack type A front bezel silver-coloured</p>	RQJ_USB3_AA
		<p>USB Jack front: USB jack type A</p> <p>rear: USB jack type B front bezel silver-coloured</p>	RQJ_USB_AB
		<p>USB Jack front: USB jack type B</p> <p>rear: USB jack type A front bezel silver-coloured</p>	RQJ_USB_BA
		<p>USB Jack front: USB jack type B</p> <p>rear: USB jack type B front bezel silver-coloured</p>	RQJ_USB_BB

RONTRON-Q-JUWEL

Ø 22.3 mm

made in germany




Panel Mount Jacks

Illustration

Dimensions

Description

Type



Fire Wire Jack


front:
Fire Wire jack

rear:
Fire Wire jack
front bezel

silver-coloured



RQJ_FW6_STB

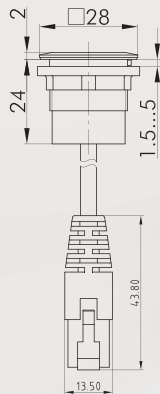

RJ45 Jack


front:
RJ45 jack with screen

rear:
60cm cable screened with RJ45 connector
front bezel

silver-coloured



RQJ_RJ45



RJ45 Jack

front:
RJ45 jack with screen

rear:
RJ45 jack with screen
front bezel

silver-coloured



RQJ_RJ45_STB

Index

About Us

Control Units

→ Actuators

Bus Technology






Enclosures

Limit Switches


Pedal Switches

Terminal Blocks

Accessories for Actuators

Illustration	Dimensions	Description	Type
 <p>IP40</p>		<p>Lead-sealable Protective Lid from -30 °C to + 70°C colour transparent</p> 	KDP22RR
 <p>IP65 IP67</p>		<p>Lead-sealable, robust Protective Lid colour transparent</p> 	KDPR22RR
		<p>Mounting Tool with torque limitation for the series QUARTEX-R(-JUWEL), KOMBITAST-R-JUWEL, RONDEX, RONDEX-M, RVA, DUX-Basic, SHORTRON, jacks of the RONTRON-R/-Q-JUWEL series</p>	S22

Cutout Dimensions

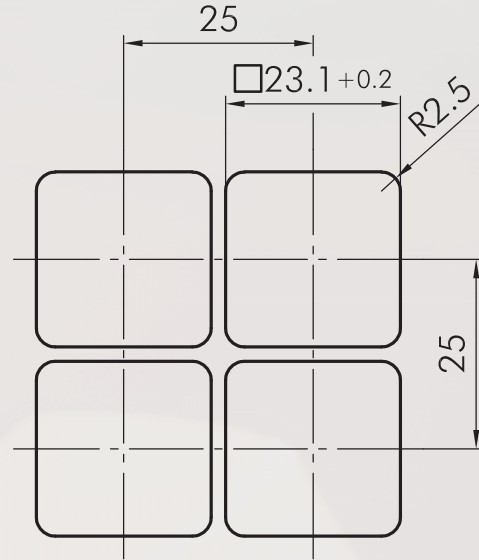

Index

About Us

Control Units

→ Actuators

Bus Technology


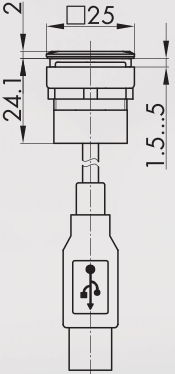










Enclosures

Limit Switches

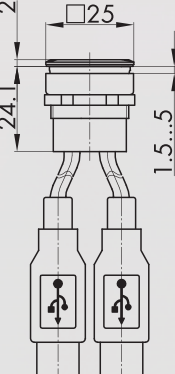
Pedal Switches

Terminal Blocks

Panel Mount Jacks
Accessories for Actuators

Illustration	Dimensions	Description	Type
		<p>USB Jack front: USB jack type A</p> <p>rear: USB2.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel black</p>	 OKJ_USB
		<p>Dual USB Jack front: 2x US: type A</p> <p>rear: 2x USB2.0 cable (length 60 cm) with plug type A</p> <p>other lengths on request front bezel black</p>	 OKJ_2USB
		<p>USB Jack front: USB jack type A</p> <p>rear: USB jack type A</p> <p>front bezel black</p>	 OKJ_USB_AA
IP40 		<p>Protective Lid for pushbuttons of the OKTRON-JUWEL series</p> <p>colour transparent</p>	 KDOKJ
		<p>Mounting Tool with torque limitation for the series QUARTEX-R(-JUWEL), KOMBITAST-R-JUWEL, RONDEX, RONDEX-M, RVA, DUX-Basic, SHORTRON, jacks of the RONTRON-R/-Q-JUWEL series</p>	S22

Cutout Dimensions

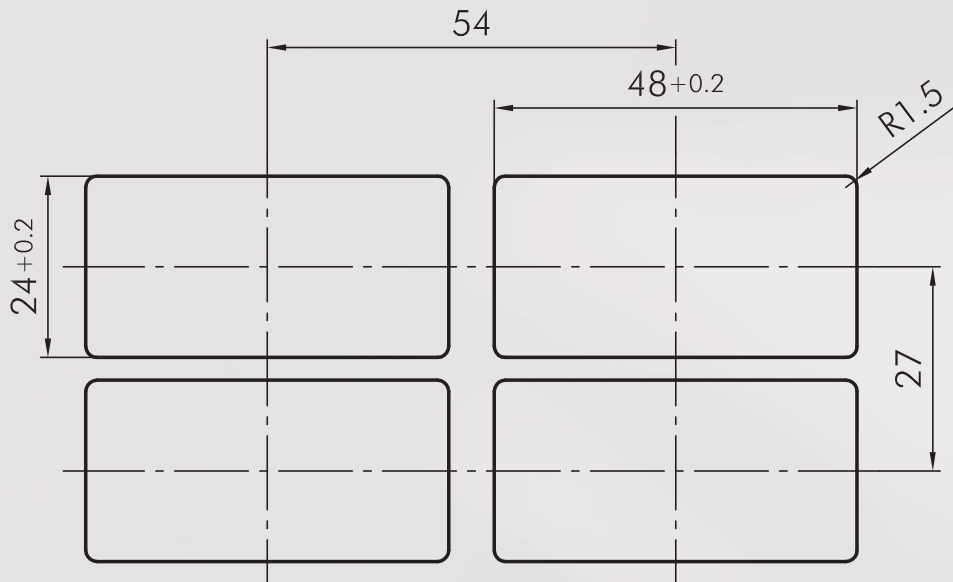

Index

About Us

Control Units

→ Actuators

Bus Technology

Enclosures

Limit Switches

Pedal Switches

Terminal Blocks


Panel Mount Jacks
Accessories for Actuators

Illustration

Dimensions

Description

Type

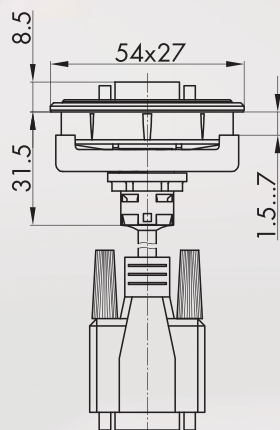

VGA Jack


front:
VGA jack

rear:
VGA cable (length 100 cm) with plug

other lengths on request
front bezel black



LXJ_VGA_100CM

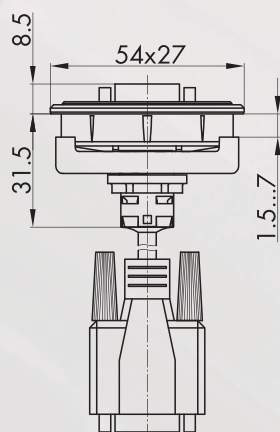

RS232 Jack

front:
RS232 jack

rear:
RS232 cable (length 100 cm) with plug

other lengths on request
front bezel black



LXJ_ RS232_100CM



Hexagonal Mounting Tool

S16

with torque limitation,
for the series OKTRON, OKTRON-JUWEL, OKTRON-R,
RONTRON-R-JUWEL, RONTRON-R-Exclusive, RONTRON-Q-
JUWEL, RONTRON-Q-Exclusive, QUARTRON(-L), QUARTRON-
JUWEL(-L), RX, RX-JUWEL

Index

About Us

Control Units

→ Actuators


Bus Technology

Enclosures

Limit Switches

Pedal Switches

Terminal Blocks

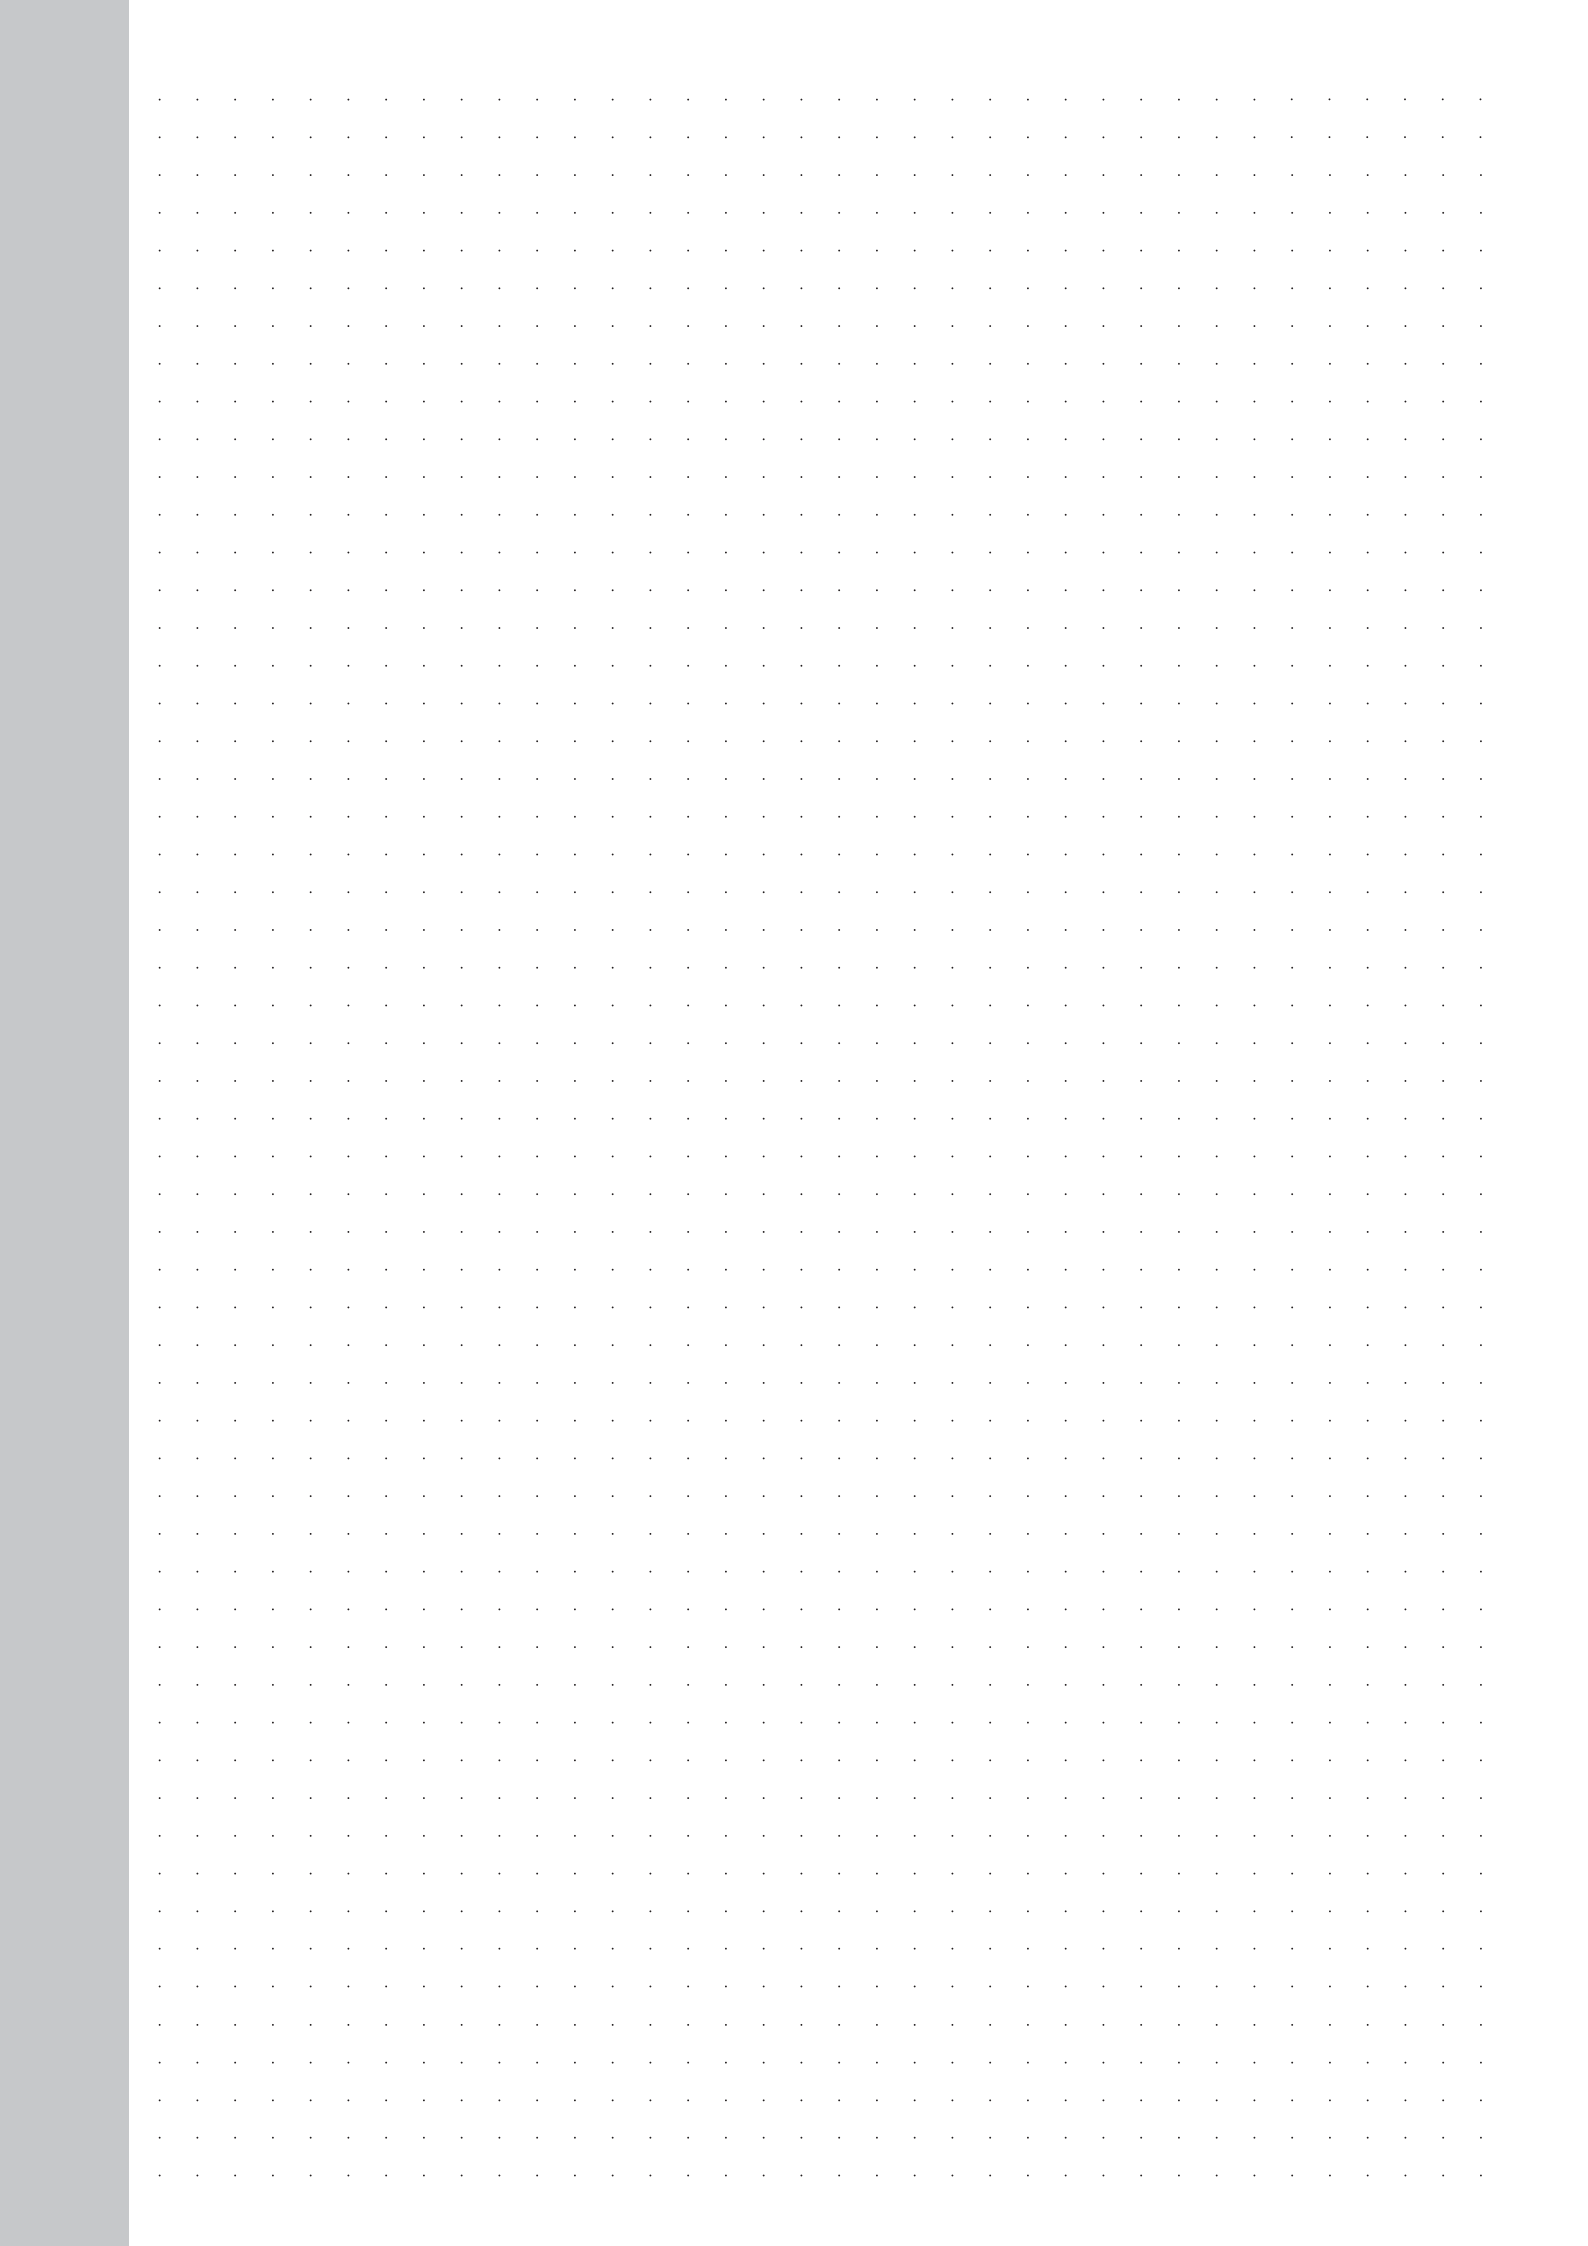



Georg Schlegel GmbH & Co. KG
Elektrotechnische Fabrik
Kapellenweg 4
88525 Dürmentingen / Germany
Tel.: +49 (0)7371 / 502-0
Fax: +49 (0)7371 / 502 49
E-Mail: info@schlegel.biz
www.schlegel.biz



Subsidiaries:



Schlegel Elektrokontakt GmbH
Schönbachstr. 93
04299 Leipzig / **Germany**
Tel.: +49 (0)341 / 8 68 72-0
Fax: +49 (0)341 / 8 68 72 33
E-Mail: leipzig@schlegel.biz
www.schlegel.biz



Georg Schlegel Vertriebs Ges.mbH
Samuel Morse-Straße 7
2700 Wiener Neustadt / **Austria**
Tel.: +43 (0)2622 / 8 13 13
Fax: +49 (0)2622 / 8 13 13-19
E-Mail: schlegel@schlegel.at
www.schlegel.at

