





Questionnaire


Accessories for running nut design LO (rotating spindle)

Tensile load, dynamic kN 

Tensile load, static kN 

Compressive load, dynamic kN 

Compressive load, static kN 

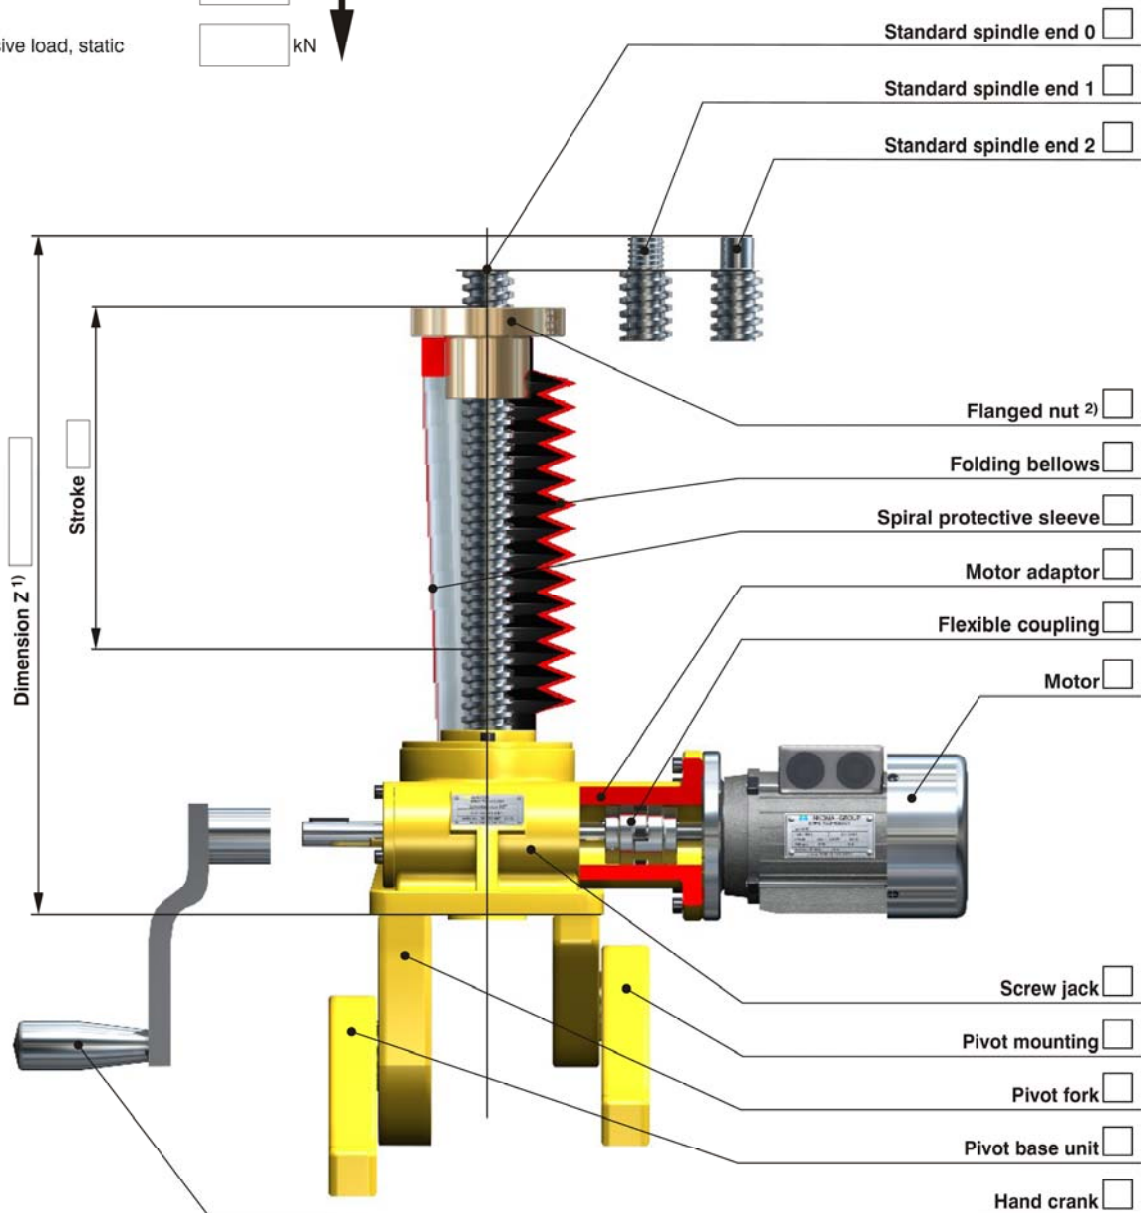

1) Dimension Z = underside of gear housing to end of spindle
 2) For further versions see catalogue accessories for SGT screw jacks.