



ARS 9000

FULLY-AUTOMATIC MICROHARDNESS TESTING SYSTEM

More Innovated Micro/Macro Vickers Hardness Testing System

Sample's tilted surface tracing function

- Easy setting of tilt angle enables to control Z axis along the sample's tilted surface.
- This function enhances "Load applying accuracy", shortens "Auto-focus time" and protects a sample and lens/indenter from collision.

Measured Image Saving Function

- You can check the images of all the measured indents.
- By re-measuring the indent image, you can modify data easily.


X-Y Stage Control

- Center movement by double-clicking and fine movement by dragging.
- The sample origin can be easily aligned and the sample setting time can be shortened.


Various Measurement Patterns

A series of measurement operations: Continuous Indentation - Focusing - Reading - Data Record: Just by selecting a measurement pattern, all testing will be fully-automatic with high speed.


- Intelligent Sample Profile Memory Function allows complicated Random measurement or Teaching Measurement along with the edge of specimen. This is Standard Function.
- Various Patterns can meet customers' requirements: Straight Line/ Zigzag/ Circle/ Arc/ Line Set/ Random/Matrix/ Teaching, etc.

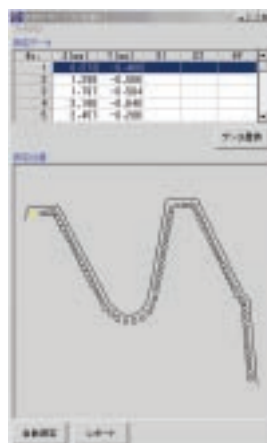

▲Teaching Pattern:
1 Line

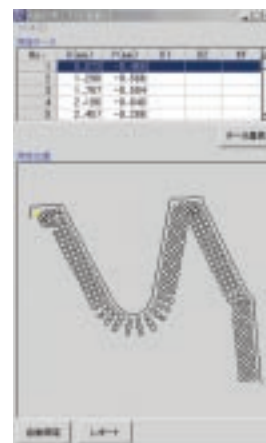

▲Teaching Pattern:
3 Lines

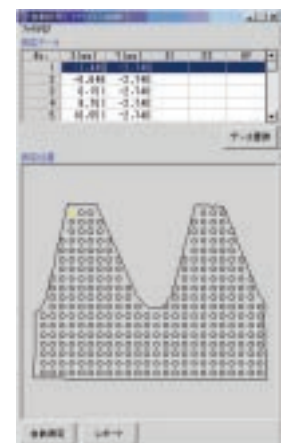

▲Matrix Pattern

- Most Advanced System with High-speed Sample Profile Memory Function
- High-speed, High-accuracy, High-repeatability, Easy-operation, Improved Read Power
- More Reliable for Large quantities of testing without human error

Data Processing Software


Capability of Reading unclear indents on un-mirror surface has been improved by more advanced Data Processing Software.



▲Mirror Surface




▲Etched Surface

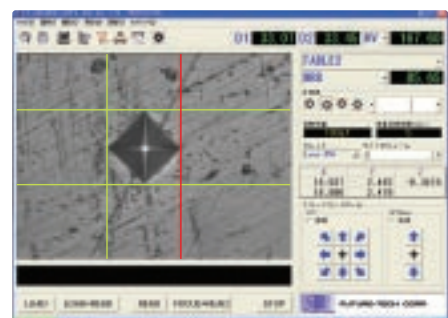

▲Scratched Surface


Various Data Output Format and Statistical Processing

- Case Depth of indicated HV Hardness can be displayed instantaneously on the Chart after continuous Measurements on Carbonized Layer.
- Various Data Output available - Measurement Data, Hardness Distribution Chart, Case Depth, Max. Value, Min. Value, Mean Value, Dispersion, Standard Deviation, Coefficient of Variation, OK-NG Criteria, Conversion Data, etc.
- Display and Output of Color Profile Picture linked with Hardness Values - Standard Function.

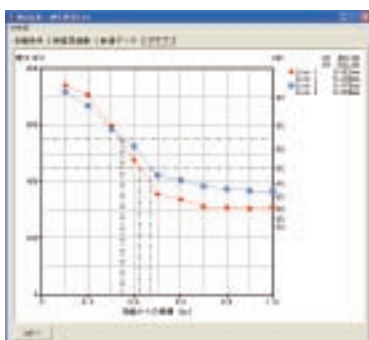


▲Display for Case Depth

▲Display for Measurement Data

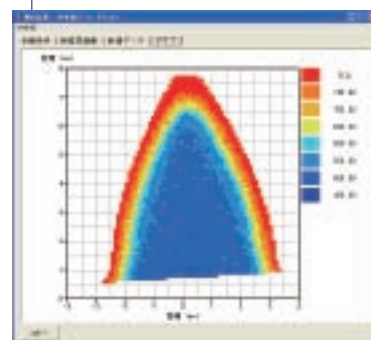


▲Display for Color Profile Picture linked with Hardness Values on Matrix Test Pattern

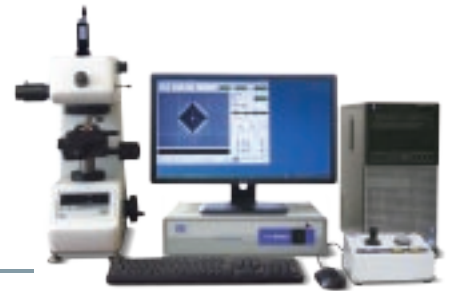

FULLY-AUTOMATIC MICROHARDNESS TESTING SYSTEM

FM-ARS 9000

ITEM		FULLY-AUTOMATIC MICROHARDNESS TESTING SYSTEM FM-ARS 9000	
STANDARD SYSTEM COMPONENT		Analog Microhardness Tester Model: FM-100S (OPTION : FM-300S, FM-800S available)	
		Automatic X-Y Stage & Motor Drive Unit	
		CCD Camera	
		Complete set of PC: 24" TFT Wide LC Monitor, Mouse, Keyboard, and Joy-Stick with Controller	
		Standard Software for System ARS 9000	
		PC: DELL or IBM Compatible Model with OS Windows 7	
		Standard Software for System ARS 9000	
MICRO HARDNESS TESTER	MODEL	Model FM-100S : Stage Elevation Motor Built-in	
	TYPE	Analog Type : Controllable Loading Operation by External PC	
	TEST LOAD	One of 4 to 5 test load types can be selected. Setting is different between models. For details, contact the sales department of our company.	
	LOADING MECHANISM	Automatic Load/Hold/Release Method	
	FOCUS OPERATION	Automatic/Manual Operation available *Focusing Steps adjustable	
	AUTO-STAGE ELEVATION	Automatic: by Built-in Stepping Motor / Manual: by Standard Handle & Joy-Stick Operation *Safety Devices equipped for Overrun of Elevation	
	PRECISION VISE	Standard: Max. Opening: 50mm	
	TURRET ROTATION	Automatic/Manual changeable	
	LOAD APPLYING SPEED	60μm/sec	
	DWELL TIME	5-40sec	
	MANUAL OCULAR	OPTION : Analog Type	
	MANUAL MEASUREMENT	By Video Line on TFT available	
	OBJECT LENS	×10/×50 (Optical Parts for 3rd Lens Built-in)	
	AUTOMATIC MEASUREMENT SCALE	Vickers Hardness (HV)/Knoop Hardness (HK)	
MANUAL MEASUREMENT SCALE	Vickers Hardness (HV)/Knoop Hardness (HK) is measurable with the optional analog type ocular.		
AUTOMATIC X-Y STAGE	DRIVING MOTOR	Stepping Motor	
	DRIVE CONTROL	By icon : 2 Steps Speed available in X-Y-Z axis By Joy-Stick : Flexible Speed Changing in X-Y-Z axis	
	DIMENSIONS	110×110mm	
	MAX. MOVEMENT	50×50mm	
	MIN. MOVEMENT	1μm	
	MOVING SPEED	1-25mm/sec adjustable	
	MOVEMENT PROGRAM PATTERN		Straight Line (Vertical & Horizontal)
			Zigzag
			Circle
			Arc
			Line Set for any Angle (8 Lines and Max. 998 indents on 1 Line/Total 49950 indents are measurable.)
		Random	
		Teaching	
		Matrix (Max. 9999 indents in a range are measurable.)	
AUTOMATIC READING	PATTERN SETTING	Start Position Setting for Straight Line and Position Setting for Random/Teaching Mode shall be performed by Mouse-Click.	
	SOFTWARE	OS: Microsoft Windows 7	
	AVAILABLE HARDNESS SCALE	Vickers Hardness (HV)/Knoop Hardness (HK)	
	MEASUREMENT REPEATABILITY	±0.8% on Test Block 700HV/500gf	
	AUTO-FOCUS TIME	Shortest 3 sec	
	AUTO READING TIME	Approx. 0.2 sec/1 indent	
	MEASURABLE MIN. INDENT	10μm	
	MIN. MEASUREMENT UNIT	0.1μm	
	MANUAL MEASUREMENT	By OPTIONAL Ocular or Video Line on TFT	
OTHER FEATURES	AVAILABLE LANGUAGES SUPPORT	Japanese/English	
	DATA OUTPUT FORMAT & EDITING FUNCTION	Hardness Value, Hardness Chart, Case Depth, Insertion of Picture, etc. and Flexible Data Editing on "EXCEL"	
	PRINTER	Standard: Color Ink-Jet Type	
	JOY-STICK	For X-Y-Z axis Movement/Standard: Digital Type	
	MANUAL OCULAR	OPTION : Analog Type	
SAFETY DEVICE		Safety Devices equipped for Unmanned Operation	
		*Turret Rotation stops instantaneously in case Object Lens or Indenter hits a specimen. *Upper & Lower Limit Stopper is equipped against Uncontrollable Stage Elevation.	

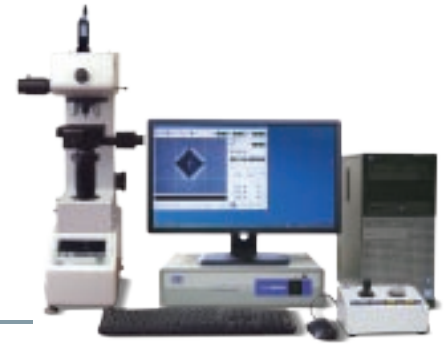

FULLY-AUTOMATIC VICKERS HARDNESS TESTING SYSTEM
FV-ARS 9000

ITEM		FULLY-AUTOMATIC VICKERS HARDNESS TESTING SYSTEM FV-ARS 9000	
STANDARD SYSTEM COMPONENT		Analog Vickers Hardness Tester Model: FV-100S (OPTION : FV-300S, FV-800S available)	
		Automatic X-Y Stage & Motor Drive Unit	
		CCD Camera	
		Complete set of PC : 24" Wide LC Monitor, Mouse, Keyboard, and Joy-Stick with Controller	
		Standard Software for System ARS 9000	
		PC : DELL or IBM Compatible Model with OS Windows 7	
HARDNESS TESTER	MODEL	Model FV-100S : Stage Elevation Motor Built-in	
	TYPE	Analog Type : Controllable Loading Operation by External PC	
	TEST LOAD	A: N: 9.807, 19.61, 29.42, 49.03, 98.07, 196.1, 294.2, 490.3 kgf: 1, 2, 3, 5, 10, 20, 30, 50 B: N: 2.942, 4.903, 9.807, 29.42, 49.03, 98.07, 196.1, 294.2 kgf: 0.3, 0.5, 1, 3, 5, 10, 20, 30	
	LOADING MECHANISM	Automatic Load/Hold/Release Method	
	FOCUS OPERATION	Automatic/Manual Operation available(Manual operation is driven by motor.)	
	AUTO-STAGE ELEVATION	Automatic: by Built-in Stepping Motor / Manual: by Joy-Stick Operation *Safety Devices equipped for Overrun of Elevation	
	PRECISION VISE	Standard: Max. Opening: 50mm	
	TURRET ROTATION	Automatic/Manual changeable	
	LOAD APPLYING SPEED	First speed : 120 μ m/sec & Real load speed: 60 μ m/sec	
	DWELL TIME	5-40sec	
	MANUAL OCULAR	OPTION : Analog Type	
	MANUAL MEASUREMENT	By Video Line on TFT available	
	OBJECT LENS	$\times 10/\times 20$ (Optical Parts for 3rd Lens Built-in)	
	AUTOMATIC MEASUREMENT SCALE	Vickers Hardness (HV)/Knoop Hardness (HK)	
MANUAL MEASUREMENT SCALE	Vickers Hardness (HV)/Knoop Hardness (HK) is measurable with the optional analog type ocular.		
AUTOMATIC X-Y STAGE	DRIVING MOTOR	Stepping Motor	
	DRIVE CONTROL	By icon: 2 Steps Speed available in X-Y-Z axis By Joy-Stick: Flexible Speed Changing in X-Y-Z axis	
	DIMENSIONS	110 \times 110mm	
	MAX. MOVEMENT	50 \times 50mm	
	MIN. MOVEMENT	1 μ m	
	MOVING SPEED	1-25mm/sec adjustable	
	MOVEMENT PROGRAM PATTERN		Straight Line (Vertical & Horizontal)
			Zigzag
			Circle
			Arc
			Line Set for any Angle (8 Lines and Max. 998 indents on 1 Line/Total 49950 indents are measurable.)
		Random	
AUTOMATIC READING		Teaching	
		Matrix (Max. 9999 indents in a range are measurable.)	
		Specificity of 2 Points	
		Specificity of Angle	
		Sample Profile Memory Function & Measurement along with Profile Line	
	PATTERN SETTING	Start Position Setting for Straight Line and Position Setting for Random/Teaching Mode shall be performed by Mouse-Click.	
	SOFTWARE	OS: Microsoft Windows 7	
	AVAILABLE HARDNESS SCALE	Vickers Hardness (HV)/Knoop Hardness (HK)	
	MEASUREMENT REPEATABILITY	$\pm 0.8\%$ on Test Block 800HV/10kgf	
	AUTO-FOCUS TIME	Shortest 3 sec	
AUTO READING TIME	Approx. 0.2 sec/1 indent		
MEASURABLE MIN. INDENT	10 μ m		
MIN. MEASUREMENT UNIT	0.1 μ m		
MANUAL MEASUREMENT	By OPTIONAL Ocular or Video Line on TFT		
AVAILABLE LANGUAGES SUPPORT	Japanese/English		
OTHER FEATURES	DATA OUTPUT FORMAT & EDITING FUNCTION	Hardness Value, Hardness Chart, Case Depth, Insertion of Picture, etc. and Flexible Data Editing on "EXCEL"	
	PRINTER	Standard: Color Ink-Jet Type	
	JOY-STICK	For X-Y-Z axis Movement/Standard: Digital Type	
	MANUAL OCULAR	OPTION : Analog Type	
	SAFETY DEVICE	Safety Devices equipped for Unmanned Operation *Turret Rotation stops instantaneously in case Object Lens or Indenter hits a Specimen. *Upper & Lower Limit Stopper is equipped against Uncontrollable Stage Elevation.	

MICRO/VICKERS HARDNESS TESTER AUTOMATION SYSTEM

AUTOMATIC INDENTATION MEASURING SYSTEM




AR 90

Indentation measurement is automated!

Light-and-dark image processing protects this system against the influence of metals or damage.

Automatic measurement can be done with high accurate repeatability exceeding any skilled technician.

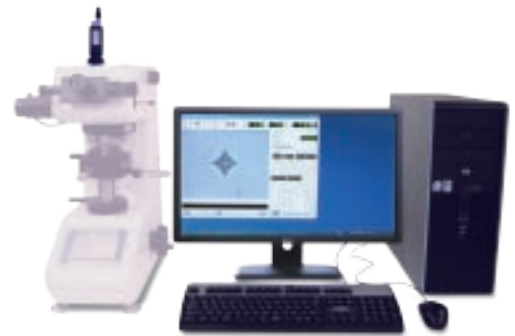

ITEM	AUTOMATIC INDENT MEASUREMENT SYSTEM AR 90
SYSTEM CONFIGURATION	CCD camera, CCD camera attachment, personal computer, printer, 24-inch LC monitor, image board, connecting cable, exclusive control, and data processing software
MIN. MEASUREMENT UNIT	0.1 μm
MEASUREMENT SCALE	HV (Vickers), HK (Knoop)
MEASURING METHOD	Light-and-dark image processing system
REPEATABILITY	±0.5% / approx. HV500 Load: 500gf
MANUAL MEASUREMENT	Video line system
AUTOMATIC READING TIME	Approx. 0.3 sec / 1 indentation
MIN. READ INDENTATION DIAMETER	10 μm (diagonal length)
DATA PROCESSING	Graph display, color conversion data, maximum value, minimum value, average, conversion, hardened layer depth, etc.

● Applicable models

- FM-100 ● FM-100e ● FM-300 ● FM-300e ● FM-700 ● FM-700e
- FV-100 ● FV-100e ● FV-300 ● FV-300e ● FV-700 ● FV-700e
- DVK-1 ● DVK-2 ● MXT-30 ● MXT-70 etc.

AUTOMATIC INDENTATION MEASUREMENT / AUTOMATIC X-Y STAGE SYSTEM



ARS 900

Indentation measurement is automated! Stage control is automated!

Light-and-dark image processing realizes the automation of indentation measurement and stage movement!



ITEM	AUTOMATIC X-Y STAGE SYSTEM ARS 900
SYSTEM CONFIGURATION	CCD camera, CCD camera attachment, automatic X-Y stage, control box, personal computer, printer, 24-inch LC monitor, image board, connecting cable, exclusive control, and data processing software
MIN. MEASUREMENT UNIT	0.1 μm
MEASUREMENT SCALE	HV (Vickers) / HK (Knoop)
MEASURING METHOD	Light-and-dark image processing system
REPEATABILITY	±0.5% / approx. HV500 Load: 500gf
MANUAL MEASUREMENT	Video line system
AUTOMATIC READING TIME	Approx. 0.3 sec / 1 indentation
MIN. READ INDENTATION DIAMETER	10 μm (diagonal length)
AGE DIMENSION	110 x 110
STAGE MOVEMENT	X50 x Y50
MIN. STAGE MOVEMENT UNIT	1 μm
DATA PROCESSING	Graph display, color conversion data, maximum value, minimum value, average, conversion, hardened layer depth, etc.


● Applicable models

- FM-300 ● FM-300e ● FM-700 ● FM-700e
- FV-300 ● FV-300e ● FV-700 ● FV-700e
- DVK-1 ● DVK-2 ● MXT-30 ● MXT-70 etc.

- By combining with Hardness Tester, stage control is automated in indent/multi-point measurement to reduce the dispersion caused by each operator.
- This system is very effective for large-scale rationalization and energy saving.

OPTIONAL ACCESSORIES

CODE No.	ITEM	MODEL / CONTENTS
M-062	Eyepiece	① × 15
M-015	Object Lens	× 100
M-016		× 40
M-017		× 20
M-019		× 5
M-014	Knoop Indenter	③ Rhombic diamond indenter for Knoop Hardness (HK)
M-063	For Brinell Hardness Test Tungsten Carbide Ball Indenter	④ Φ 1 mm
M-028	Precision Vise	⑤ Max. Opening : 100mm
M-029	Rotary Table	⑥ Graduation of rotary angle : 5° Table dia : 128mm (Mounted onto X-Y stage)
M-030	Thin Specimen Measuring Device	⑦ Specimen thickness : 5mm max.
M-031	Fine Specimen Measuring Device	Vertical Type ⑧ Specimen dia : Φ5mm max. (For measuring cross section)
M-032		Horizontal Type ⑨ Specimen dia : Φ5mm max. (For measuring cylindrical surface)
M-033	Specimen Inclining Device	⑩ Specimen height : 5~20mm (For measuring mounted specimen)
M-034	Universal Specimen Vise	⑪ Max. Opening : 45mm
-	Rotary Mounted Specimen Inclining Device	⑫ Specimen height : 5~30mm
-	Mounted Specimen Inclining Device	⑬ Specimen height : 5~30mm
M-090	Automatic X-Y Stage	⑭ Movement : X150mm × Y80mm
M-091	Fixing Jig for Six Mounted Specimens	⑮ For 32ø, 38ø and 40ø
M-043	Vibration Insulation Stage	⑯ Vibration-proof rubber type
M-065	Dual Indenter Turret	⑰ Used when two HV/HK indenters are mounted at the same time. Specify this turret when ordering. Replacement is permitted only in our company's factory.

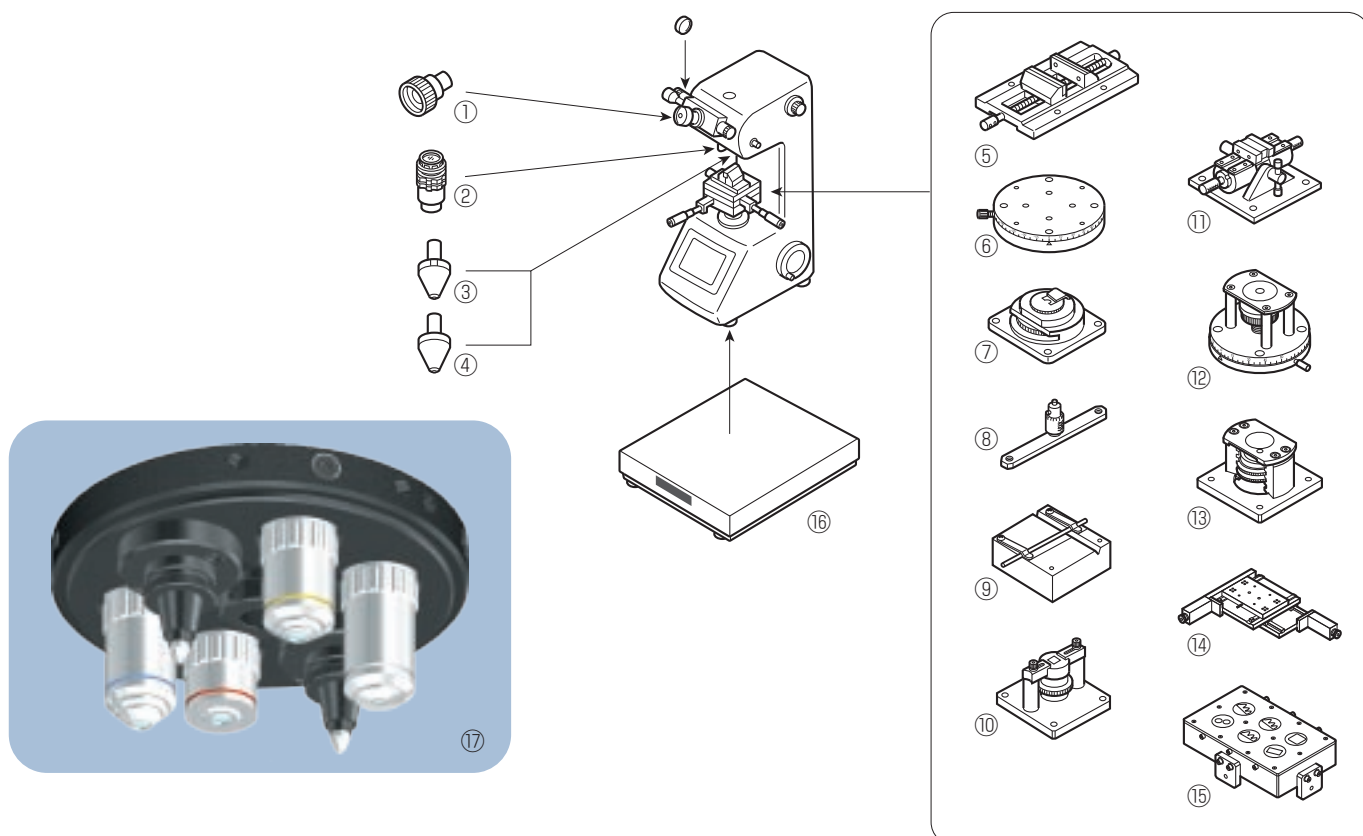

STANDARD ACCESSORIES

MODEL	FULLY-AUTOMATIC MICROHARDNESS TESTING SYSTEM FM-ARS 9000			FULLY-AUTOMATIC VICKERS HARDNESS TESTING SYSTEM FV-ARS 9000		
ITEM	CODE No.	SPECIFICATIONS	No.	CODE No.	SPECIFICATIONS	No.
HARDNESS STANDARD BLOCK	M-037	700HV	1	V-039	800HV	1
PRECISION VISE	M-027	Max.Opening : 50mm	1	V-027	Max.Opening : 50mm	1
DIAMOND INDENTER (BUILT-IN)	M-013	For Vickers (HV)	1	V-013	For Vickers (HV)	1
OBJECT LENS (BUILT-IN)	M-061	×50	1	V-017	×20	1
	M-018	×10	1	V-018	×10	1
LEVEL ADJUSTING LEG	M-052	For Hardness Tester	4	V-053	For Hardness Tester	4
LEVEL	M-066	—	1	—	—	—
INDENTER COVER (BUILT-IN)	M-053	—	1	V-054	—	1
SPARE LIGHT SOURCE BULB	M-044	6V18W	2	V-045	6V18W	2
CAMERA MOUNTING TUBE	M-054	For adapting CCD Camera	1	V-055	For adapting CCD Camera	1
MACHINE COVER	M-055	For Hardness Tester	1	V-056	For Hardness Tester	1
POWER CORD	M-051	For Hardness Tester	1	V-052	For Hardness Tester	1
SYSTEM CONNECTING CABLE	—	—	1	—	—	1
AUXILIARY TOOLS	—	Screwdriver, Wrench, etc.	1	—	Screwdriver, Wrench, etc.	1
ACCESSORY BOX	M-056	For Hardness Tester	1	V-057	For Hardness Tester	1
INSTRUCTION MANUAL	—	—	1	—	—	1

※ Appearance and specifications are subject to change without prior notice.



FUTURE-TECH CORP.

HEAD OFFICE : TALKPIER KAWASAKI BLDG., NO. 5-1, 3-CHOME, FUJISAKI, KAWASAKI-KU, KAWASAKI, KANAGAWA, 210-0804 JAPAN
 TEL +81-44-270-5789 FAX +81-44-266-6779
 E-mail: info@ft-hardness.com
 URL : http://www.ft-hardness.com

EUROPEAN REPRESENTATIVE OFFICE :
 VIA LOMELLINA 33, 20090 BUCCINASCO, MILAN, ITALY
 TEL/FAX: +39-02-30912227
 E-mail: cantoni.fte@gmail.com

USA OFFICE : 46590 RYAN COURT, NOVI, MI 48377, USA
 TEL: +1-248-669-3100 FAX: +1-248-669-1199
 E-mail: mantonik@sunteccorp.com

F.T.T.CO.,LTD. / ASIA PRODUCTS SUPPORT CENTER :
 200 THOSAPOL BLDG., 3RD FL., UNIT C,
 RATCHADAPISEK RD., HUAYKWANG,
 BANGKOK 10310, THAILAND
 TEL: +66-2-692-7667-8 FAX: +66-2-692-7669
 E-mail: siripong@ft-hardness.com

Agent :

