

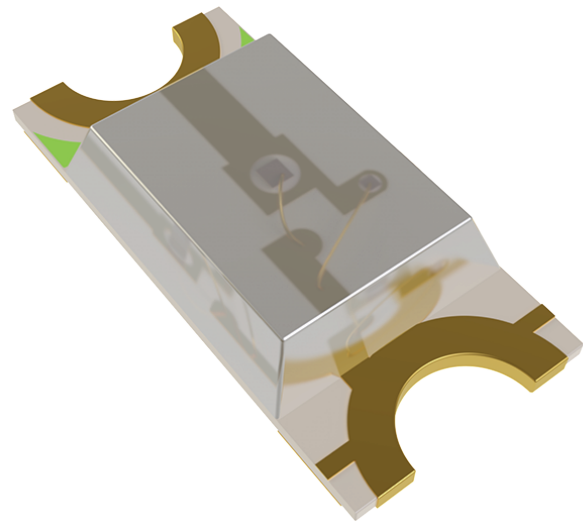



SMD-LED Mono-Color 0,35mm with ESD Protection




Bottom



Top

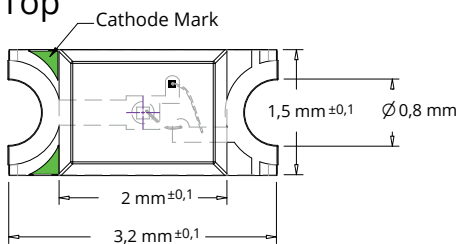

For Reflow Soldering

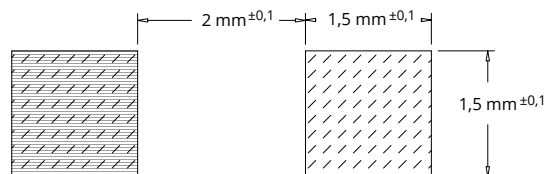

MONO-COLOR	Min Wavelength (nm)	Max Wavelength (nm)	Die Material	Type	Hight(mm)	Brightness mcd at 20mA /Sorted by BIN	Angle	Packing	ESD Rating
red	630	635	AlGaInP	1206	0,35	50-100	140°	2000/reel	2000 V
orange/amber	602	608	AlGaInP	1206	0,35	80-160	140°	2000/reel	2000 V
yellow	588	592	AlGaInP	1206	0,35	80-200	140°	2000/reel	2000 V
yellow-green	570	576	AlGaInP	1206	0,35	40-100	140°	2000/reel	2000 V
pure-green	520	530	InGaN+TVS	1206	0,35	400-800	140°	2000/reel	6000 V
blue	460	470	InGaN+TVS	1206	0,35	100-200	140°	2000/reel	6000 V
white			InGaN+TVS	1206	0,35	800-1250	140°	2000/reel	6000 V

Mono-Color

Mono-Color with TVS

