

# ECI Motor

ECI-80.40-K1




- Highly dynamic 3-phase internal rotor motor with EC technology
- Robust, noise-optimized ball bearing system for a long service life
- Mechanical design and interfaces designed for modular flexibility
- High efficiency and high power density realized in a compact design
- Basic motor with electronic module K1 for operation with external drive electronics
- Protection rating IP 40 / IP 54 and connection by connector system

Nominal data			
Type		ECI-80.40-K1 B00	ECI-80.40-K1 D00
Nominal voltage ( $U_n$ )	VDC	24	48
Nominal speed ( $n_n$ )	min <sup>-1</sup>	4000**	4000**
Nominal torque ( $M_n$ )	mNm	1200**	1200**
Nominal current ( $I_n$ )	A	25**	12**
Nominal output power ( $P_n$ )	W	503**	503**
Free-running speed ( $n_f$ )	min <sup>-1</sup>	4700	4850
Permanent holding torque ( $M_{HO}$ )	mNm	1200	1200
Permiss. peak current ( $I_{max}$ )	A	100	100
Motor constant ( $K_e$ )	mVs/rad	48.2	96
Terminal resistance ( $R_v$ )	Ω	0.03	0.1
Terminal inductance ( $L_v$ )	mH	0.2	0.6
Starting torque ( $M_{max}$ )	mNm	3900	5000
Ambient temperature range (TU)	°C	-30...+40	-30...+40
Rotor moment of inertia ( $J_B$ )	kgm <sup>2</sup> x10 <sup>-6</sup>	500	500
Motor mass (m)	kg	2.1	2.1
Order number (IP 40)	Wire interface	932 8040 103	932 8040 105
Order number (IP 54)*	Connector interface	on request	on request


subject to alterations

\* Classification of protection class refers to installed state with sealing on the flange side  
 \*\* at  $T_U$  max. 40 °C / 104 °F




$F_{axial}$  280 N  
 $F_{radial}$  280 N  
 $L_1 = 20$  mm

Permissible shaft load at nominal speed and life expectancy  $L_{10}$  of 20 000 h\*\*

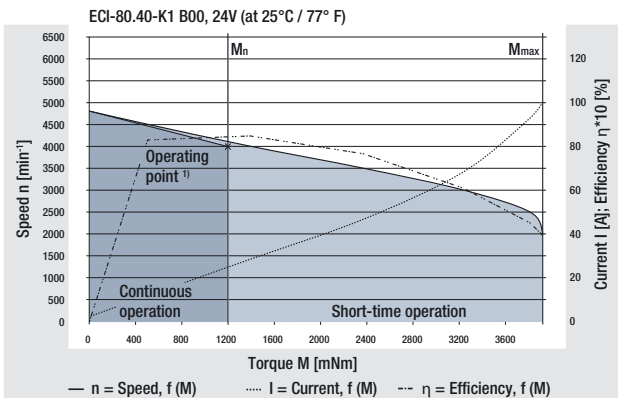

<sup>1)</sup> Nominal data, see table above


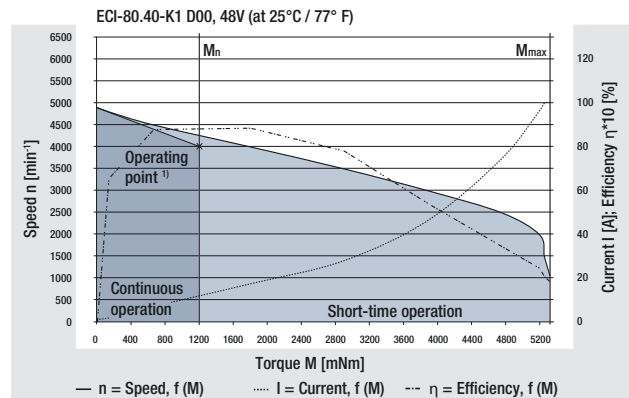


<sup>1)</sup> Nominal data, see table above

# ECI Motor

ECI-80.40-K1

## Technical drawing

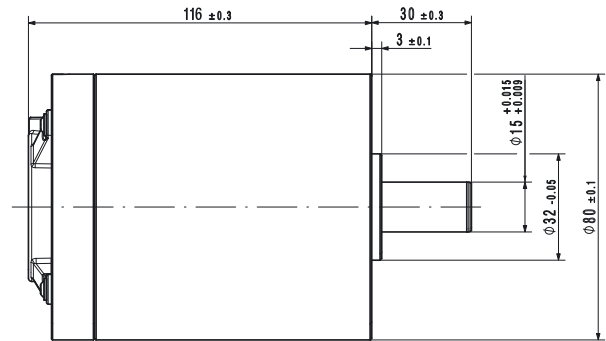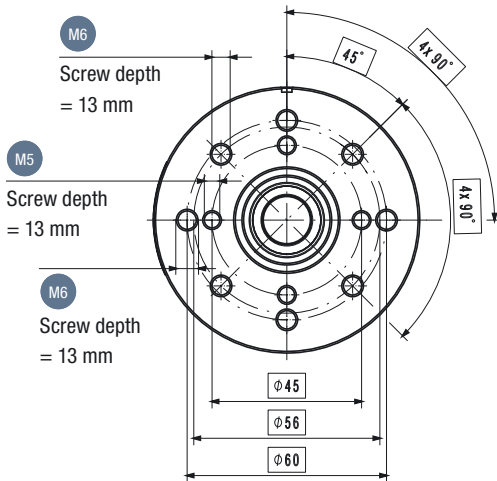

Tapped blind holes for thread-forming screws in accordance to DIN 7500.


Tightening torque:  $\text{M5}$   $6 \pm 0.2 \text{ Nm}$   
 $\text{M6}$   $10 \pm 0.2 \text{ Nm}$

## Accessory (must be ordered separately)

### Sensor cable with wires and plug AWG 24 (0.22 mm<sup>2</sup>)

Type	Order number
Sensor cable	992 0800 001


motor side



### Winding connector AWG 12 (4 mm<sup>2</sup>)

Type	Colour	Order number
Power wire L1	brown	992 0800 012
Power wire L2	purple	992 0800 011
Power wire L3	yellow	992 0800 010

motor side



## Possible gearbox variants

Type	
on request	


## Connection description Motor (IP 40 version)

Picture 1 = with cover (simplified design)

Picture 2 = cover removed (simplified design)

Cable outlet sensor cable

Socket for sensor cable

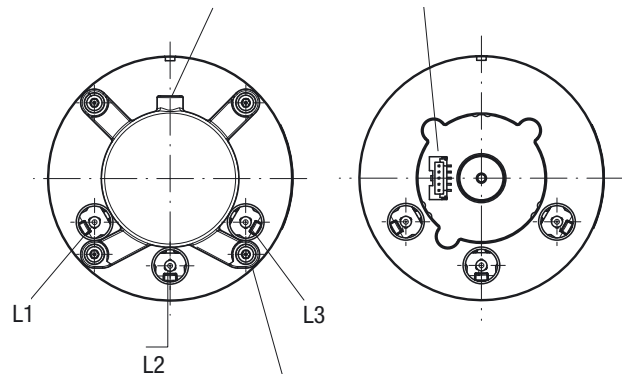

Tightening torque:  $\text{M3}$   $1.5 \pm 0.2 \text{ Nm}$

## Recommended external control electronics

Type	Order number
VT-MI-35	992 0801 035