




NEW JEROS TUNNEL WASHER



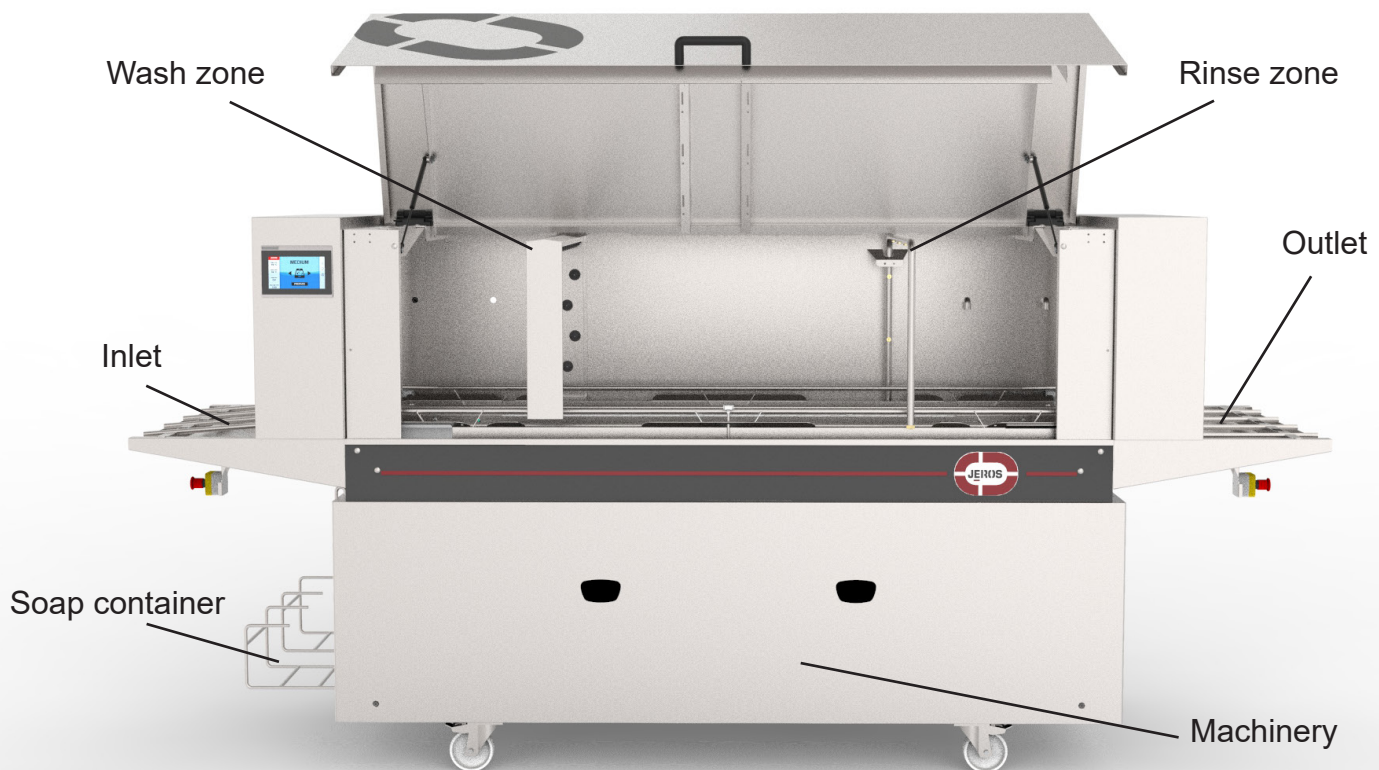


The lid can be lifted for easy access to the washing system.
Makes is easy to clean and remove stucked objects. The conveyor can be lifted as well.

The machine is controlled from the user friendly touch screen
and the most important information is easy to access.




INTERFACE

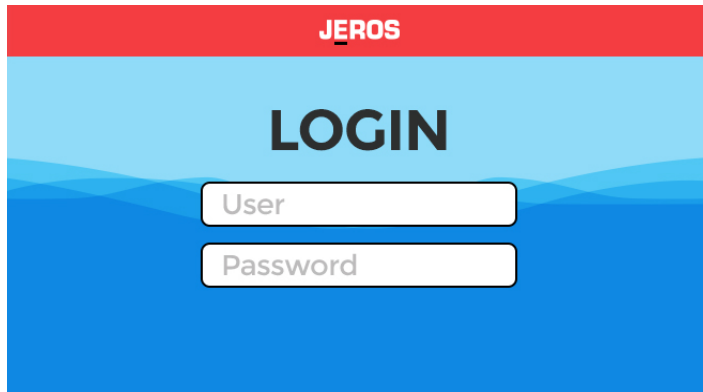


Login screen. Have different levels of users. Only users with administration level can change the setups



Change program, control the temperature of the washing water and rinse water, control the soap level and when the machine was last filled

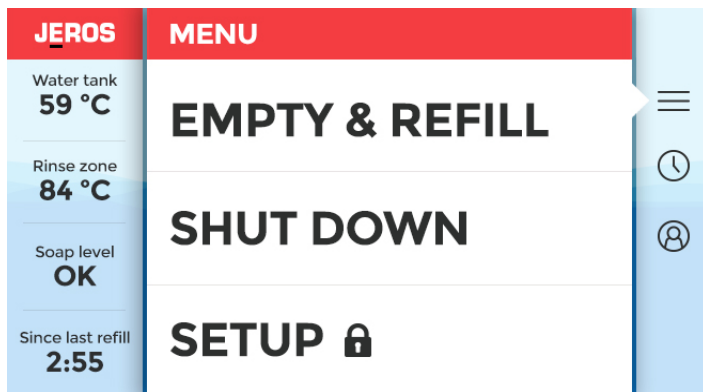


The menu screen. Empty the wash tank and refill it, shut down the machine or go to the machine setup

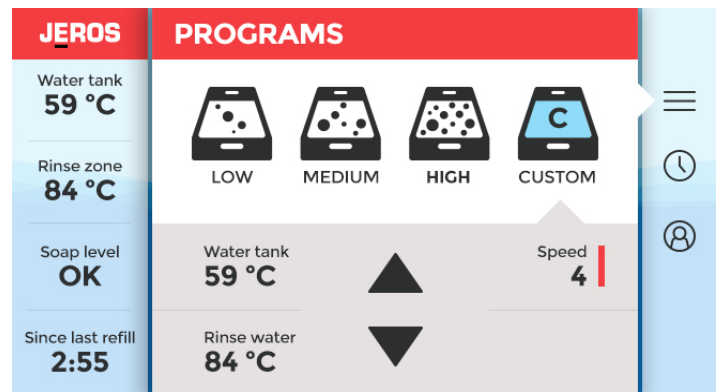

Program configurator. Change the speed of the conveyor or the water temperature.

Low: 150 boxes pr hour
Medium: 225 boxes pr hour
High: 300 boxes pr hour

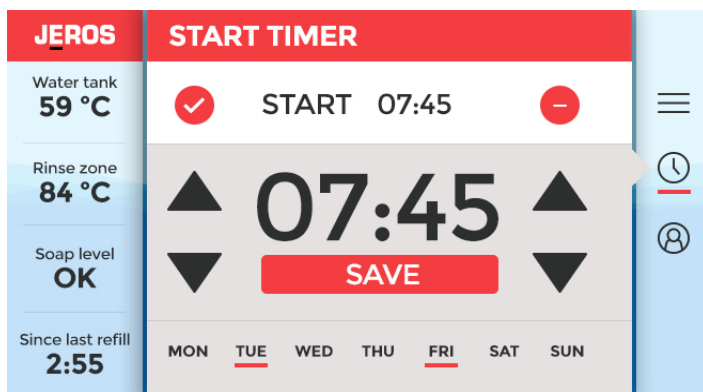

Scheduled start. Set the machine to fill and warm up at a certain time to make sure the user do not have to waste time



Basic Model

Capacity: Crates per hour	150 - 300
Tunnel run-throug W x H mm	650x470
Length (incl. In-/outlet) mm	3350
Width mm	1127
Height (without one-man-operation) mm	1570

Wash section

Length mm	940
Wash tank capacity liter	100
Pump capacity kW	2.4
Pump capacity l/min	370
Wash tank heating kW	2x6
Water pressure	1.3
Wash nozzles	47

Neutral zone

Length mm	600
-----------	-----

Rinse section

Length mm	570
Rinse nozzles	11

In general

Connection kW	32
Voltage connection	400 V/50 Hz
Fuses	50A
Water connection R"	1/2
Water drain Ø mm	50

Optional Extras

- Trolley system
- Soap dosage pump
- Conveyor / Lattice belt
- Rinse aid pump
- Variable conveyor speed
- One-man operation
- After rinse heater
- Drying section
- Datalog trough VPN

