



## NGI Bearing Houses Safer Food Production

Our bearing houses are extremely easy to clean fom all angles as water can easily reach all surfaces. All transitions and connections between materials are hygienically sealed with blue sealings.

- √ 3-A, EHEDG, USDA, and IP69Kcertified bearing houses
- ✓ Easy access for cleaning from all angles
- ✓ Unique patented seal system, waterproof at more than 3° misalignment
- ✓ Sustainable and future-proof solution as you reduce the use of water and detergent by cleaning
- ✓ Minimize the risk of contamination in the production

- ✓ Maintenance-free and as you do not have to lubricate the bearings, you eliminate the risk of slippery floors
- ✓ Housing made from grilamid, a high strength High-performance PA12 and optimized for detection in the food and pharmaceutical industries
- ✓ The bearing is protected by a, patented, waterproof sealing that blocks out dirt and bacteria
- ✓ Easy to install and can easily substitute a current, unhygienic solution

## Assortment Bearing Houses





MINIMIZED

CLEANING TIME




MINIMIZED WATER USAGE

2-hole flange - type XB2FC Shaft Ø 20 mm - 40 mm





4-hole flange - type XB4FC Shaft Ø 20 mm - 40 mm

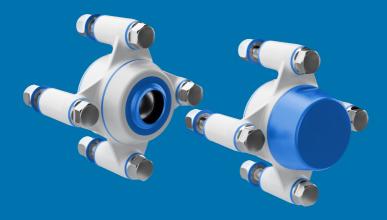

3-hole flange - type XB3FC Shaft Ø 20 mm - 30 mm
















Tapped base - type XBTBC Shaft Ø 25 mm - 30 mm





All models can be supplied with M10 certified hygienic nuts and bolts for maximum hygienic safety

Pillow block - type XBPBC Shaft Ø 25 mm - 30 mm





