

NOS



Anodes
Anoder



Index

Aluminum anodes:.....15.4
Tank anodes.....15.4
Hull anodes.....15.4

Zinc anodes:15.5
Tank anodes.....15.5
Hull anodes.....15.5

Bolt-on anodes:15.6
Antifouling anodes:.....15.7

Indhold

Aluminiumsanoder:.....15.4
Tankanoder.....15.4
Skroganoder.....15.4

Zinkanoder:15.5
Tankanoder.....15.5
Skroganoder.....15.5

Anoder til påboltning:15.6
Brydningsanoder:15.7





Aluminum anodes:

Tank anodes

- Remember to inform type upon ordering



Aluminiumsanoder:


Tankanoder

- Husk at oplyse type ved bestilling

Art. No.	Type	Anode dimensions - mm				Weight kg	
		Length	Upper base	Lower base	Height	Net	Gross
16 01 0001	AT30	220	65	50	75	2,5	3,0
16 01 0002	AT44	765	50	40	57	4,4	5,5
16 01 0003	AT50	380	65	50	75	4,3	5,0
16 01 0004	AT80	610	65	50	75	7,1	8,0
16 01 0005	AT82	1220	50	40	57	8,3	9,8
16 01 0006	AT110	765	65	50	75	8,9	10,0
16 01 0007	AT117	1000	65	50	75	11,7	13,0
16 01 0008	AT130	640	85	75	95	12,4	13,3
16 01 0009	AT159	750	85	75	95	14,5	15,6
16 01 0010	AT160	1500	60	45	68	13,5	15,3
16 01 0011	AT180	1500	65	45	70	15,5	17,3
16 01 0012	AT210	1000	85	75	95	19,3	20,6
16 01 0013	AT250	1220	85	75	95	23,5	25,0
16 01 0014	AT310	1500	85	75	95	29,0	30,7

Hull anodes

- Remember to inform type upon ordering

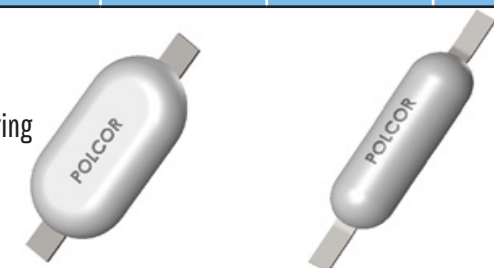

Skroganoder

- Husk at oplyse type ved bestilling

Art. No.	Type	Anode dimensions - mm			Weight kg	
		Length	Width	Height	Net	Gross
16 02 0001	A15	230	78	37	1,1	1,5
16 02 0002	A28	290	100	50	2,3	2,8
16 02 0003	A30	275	148	32	2,7	3,5
16 02 0004	A37	285	145	71	3,7	4,2
16 02 0005	A43	285	145	75	4,3	4,8
16 02 0006	A60	450	100	52	5,0	6,2
16 02 0007	A66	549	127	55	6,6	8,0
16 02 0008	A100	550	128	50	8,5	9,9
16 02 0009	A120	555	132	68	10,3	11,8
16 02 0010	A140	660	132	68	12,3	14,1
16 02 0011	A150	920	128	52	13,0	15,0
16 02 0012	A168	920	128	57	14,8	16,8
16 02 0013	A180	920	128	60	16,0	18,0
16 02 0014	A200	920	128	68	18,0	20,0
16 02 0015	A223	920	128	72	20,3	22,3
16 02 0016	A260	920	132	79	24,0	26,0



Zinc anodes:

Tank anodes

- Remember to inform type upon ordering



Zinkanoder:

Tankanoder

- Husk at pålyse type ved bestilling

Art. No.	Type	Anode dimensions - mm				Weight kg	
		Length	Upper base	Lower base	Height	Net	Gross
16 03 0001	ZT34	200	50	40	57	3,4	4,0
16 03 0002	ZT50	270	50	40	57	4,8	5,4
16 03 0003	ZT57	335	50	40	57	5,7	6,5
16 03 0004	ZT80	410	50	40	57	7,3	8,0
16 03 0005	ZT110	520	50	40	57	9,1	10,0
16 03 0006	ZT100	600	50	40	57	10,0	11,0
16 03 0007	ZT130	640	50	40	57	11,0	12,0
16 03 0008	ZT133	250	85	75	95	13,3	14,0
16 03 0009	ZT150	830	50	40	57	14,5	15,6
16 03 0010	ZT165	550	65	50	75	16,5	17,4
16 03 0011	ZT200	1000	50	40	57	18,3	19,6
16 03 0012	ZT195	500	80	70	75	19,5	20,4
16 03 0013	ZT230	1220	50	40	57	21,5	23,0
16 03 0014	ZT320	1220	60	45	68	30,0	31,5

Hull anodes

- Remember to inform type upon ordering



Skroganoder

- Husk at oplyse type ved bestilling

Art. No.	Type	Anode dimensions - mm			Weight kg	
		Length	Width	Height	Net	Gross
16 04 0001	10Z	180	60	30	1,0	1,1
16 04 0002	20Z	220	75	35	2,0	2,1
16 04 0003	30Z	230	78	37	2,2	2,6
16 04 0004	Z30	250	80	25	2,8	3,0
16 04 0005	45Z	290	100	47	4,5	5,0
16 04 0006	50Z	290	100	50	4,8	5,3
16 04 0007	70Z	275	92	45	6,0	6,5
16 04 0008	80Z	275	148	32	7,3	8,0
16 04 0009	95Z	285	145	66	9,5	10,0
16 04 0010	110Z	285	145	71	10,1	10,6
16 04 0011	130Z	450	100	62	11,8	13,0
16 04 0012	160Z	590	105	48	14,3	16,0
16 04 0013	185Z	550	127	48	18,5	20,0
16 04 0014	220Z	550	128	50	20,5	22,0
16 04 0015	285Z	630	130	61	28,5	30,0
16 04 0016	300Z	630	130	55	24,31,1	26,0

Bolt-on anodes:

- Remember to inform type upon ordering




Anoder til påboltning:

- Husk at oplyse type ved bestilling

Antifouling anodes:

Brydningsanoder:

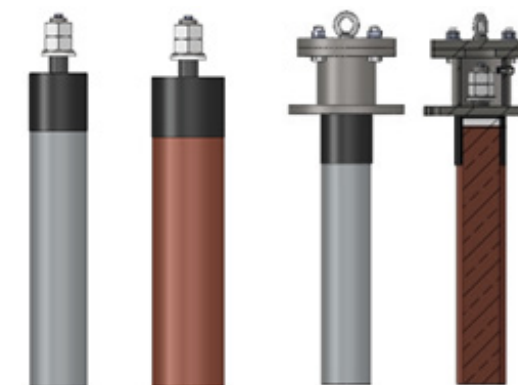

Art. No.	Type	Anode dimensions - mm				Weight kg			
						Aluminum		Zinc	
		Length	Width	Pitch	Height	Net	Gross	Net	Gross
16 05 0001	B2	150	70	80	20	0,5	0,6	1,4	1,5
16 05 0002	B4	200	100	110	30	1,4	1,5	3,1	3,2
16 05 0003	B9	300	150	160	30	3,0	3,3	7,9	8,2
16 05 0004	B10	300	150	160	40	4,2	4,5	11,1	11,4
16 05 0005	B11	300	150	160	50	5,1	5,4	13,5	13,8
16 05 0006	B15	300	200	160	40	5,3	5,6	14,8	15,1
16 05 0007	B17	300	200	160	50	7,3	7,6	20,3	20,6
16 05 0008	B20	300	200	160	65	10,3	10,6	26,4	26,7
16 05 0009	B92A	540	140	340	64	9,2	9,6		
16 05 0010	B110A	300	200	160	75	11,0	11,3		
16 05 0011	B114A	460	200	260	64	11,4	11,8		
16 05 0012	B130A	400	200	180	70	13,0	13,4		
16 05 0013	B145A	920	128	305	60	14,5	16,1		
16 05 0014	B150A	540	200	340	65	15,0	15,6		
16 05 0015	B155A	400	200	160	85	15,0	15,5		
16 05 0016	B233Z	540	140	340	65			23,3	23,7
16 05 0017	B304Z	400	200	160	62			30,4	30,8
16 05 0018	B400Z	400	200	160	85			39,5	40,0
16 05 0019	B410Z	540	200	340	65			41,0	41,6

We also offer anti-fouling anodes. Our anti-fouling anodes not only keep the ship from rusting, but also protects the ship from organic growth.

The anodes can be placed outside and inside of the ship. When the anodes are placed, they also protect the pipes from algae and likes, so that the pipes do not get clogged.

Clogged pipes can cause dangerous situations with firefighting equipment, overheating the ship and loss of speed. the process of cleaning, or in many cases replacing complete pipe sections, can be a very time-consuming and expensive problem.

Vi tilbyder også anti-fouling anoder. Udover at beskytte skibet imod rust, beskytter disse anoder også imod organisk vækst.

Anoderne kan påsættes udenpå og inden i skibet, således at alger og lignende ikke tilstopper rør.

Blokerede rør kan forårsage farlige situationer med brandslukningsudstyr, overophedning og tab af fart. Rengøring, eller i mange tilfælde udskiftning af komplette rørsektioner, kan være et tidskrævende og dyrt problem.

