

GLASS HINGE (FOR INSET DOORS)

Under Development

INSTRUCTION

TEMPERED GLASS

GS-GH50



Features

- A hinge for inset doors in large glass display cases.
- Can be used with Million Lock Cylinder GS-GL50 Glass Lock to create a unified design for glass display cases.
- Temporary fastening mechanism holds the door in the frame temporarily, making the door easier to install than conventional products.
- Can be adjusted upward and horizontally.

Remarks

- Read all remarks on handling thoroughly before use.
- Prioritize the door weight when determining the glass size.

Sold in sets (2 pcs).

CAD	Item Code	Item Name	Finish	Glass Width (mm)	Glass Height (mm)	Glass Thickness (mm)	Load Capacity N/1Set	Load Capacity kgf/1Set
-	-	GS-GH50-CR	Chrome Plating	Max. 900	Max. 2500	8 - 12.7	490	50
-	-	GS-GH50-GP	24K Gold Plating					

STAINLESS STEEL HINGE FOR GLASS DOORS

SUS TEMPERED GLASS

XL-GH02AF-120



Passed 100,000 cycles of in-house testing



XL-GH02AF-120L (Reverse side view)

Features


- Can even be used for areas such as shower booths where water is used.
- Use a glass edge protector suitable for the installation area (sold separately).
- This product is the same shape as the XL-GH02F-120 Hinge for Stainless Steel Glass Doors but does not automatically close.

Remarks

- Can be used in areas exposed to water such as shower booths.
- Use a glass edge protector suitable for the installation area (sold separately).
- This product is the same shape as the XL-GH02F-120 Hinge for Stainless Steel Glass Doors but does not self-close.


Parts Included

Size M5 x 16 cross-recessed sash screws

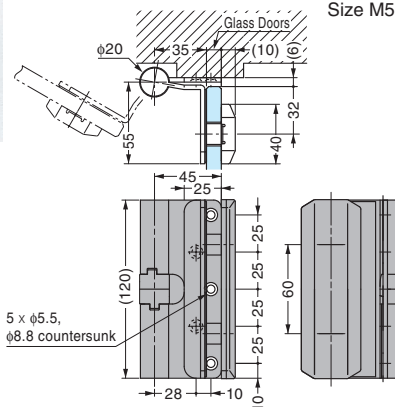

Left-hand opening shown. The right-handed opening is symmetrical.

Cut Out Dimensions



Sold in sets (2 pcs).

CAD	Item Code	Item Name	Type	Material	Finish	Door Width (mm) /1Set	Door Height (mm) /1Set	Glass Thickness (mm)	Load Capacity N/1Set	Load Capacity kgf/1Set
-	170-032-186	XL-GH02AF-120R	Right Side	Stainless Steel (SUS304)	Mirror	Max. 750	Max. 2000	10 - 12	441	45
-	170-032-185	XL-GH02AF-120L	Left Side							