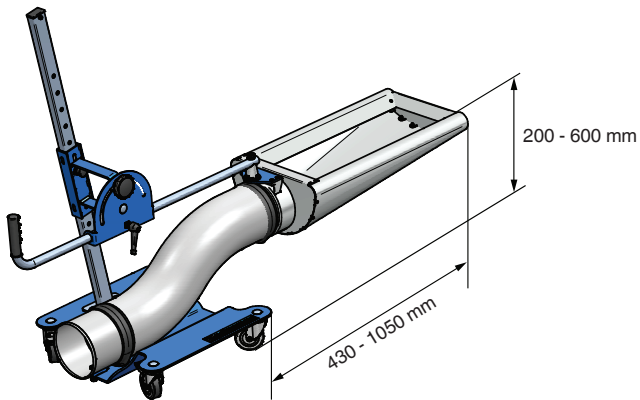


On Floor Extraction Kit



On floor exhaust extraction nozzles

Nederman offers an extensive range of robust rubber and metal nozzles for various types of vehicles and systems, including European standard EURO 6 engines. The flexible generic stand accommodates most exhaust pipe positions and designs, and the nozzles can tolerate very hot exhaust temperatures. For example, metal nozzles can withstand up to 400°C (752°F). Adjustable, specially designed test funnels for use in, for example, inspection centres.

Below is an order example for a complete product configured for trucks. Order both of the following articles:

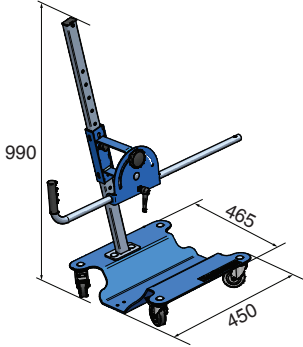
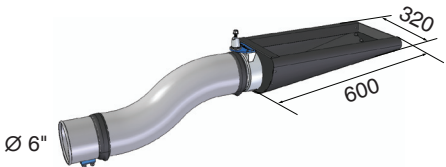
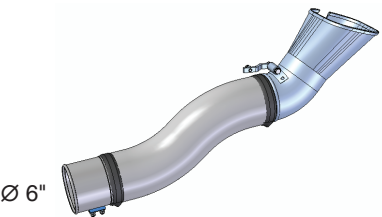
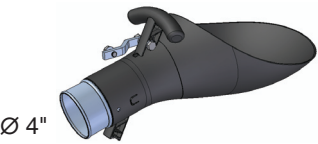
20816961 + 20817061 =>

Flexible Stand with Alu-funnel Ø150/6" incl hose.

Recommended air flow	(m³h)	(cfm)
Cars	400 - 600	235 - 355
Trucks/coaches	800 - 1200	470 - 705

- A generic flexible stand for multiple adjustable position possibilities.
- Easy manual connection and disconnection of both hoses and nozzles.

Technical Data

Item	Article number	Dimensions (mm)	Weight (kg)	Material
Flexible stand	20816961		15	Steel, plastic
Alu-funnel, Ø150/6" including hose	20817061		3	Steel, aluminium, rubber High temperature resistant Kevlar based hose
VIC hood, Ø150/6" including hose	20817161		3	Steel, aluminium, rubber High temperature resistant Kevlar based hose
Rubber hood, Ø100/4"	20817261		2	Steel, plastic, rubber