


Carbon Clamp



The Carbon Clamp provided by Carbon Tech Europe BV is an universal leak sealing solution for active leak situations up to 20 bar for pipelines transporting liquids and/or gases. Thanks to its low profile of 18 mm the carbon clamp can be installed together with Revowrap and/or our Fiberglass solutions. The different pieces (lengths vary from 2" up to 8") can be connected with one another in any combination. As the number of pieces that are to be connected is not limited the carbon clamp can be successfully installed on any pipes starting from 4" in diameter. Each connection of pieces gives 2.5 cm regulation in terms of the length of the clamp. The combination with the fast-curing epoxy, the sealing tapes and/or rubber patch provides a solid approach to stop the leak. Be aware to stop the leak before proceeding wrapping.

Product Type	
CCC02 Carbon Clamp 2" 189mm x 89mm	CCC06 Carbon Clamp 6" 528mm x 89mm
CCC03 Carbon Clamp 3" 279mm x 89mm	CCC08 Carbon Clamp 8" 688mm x 89mm
CCC04 Carbon Clamp 4" 359mm x 89mm	

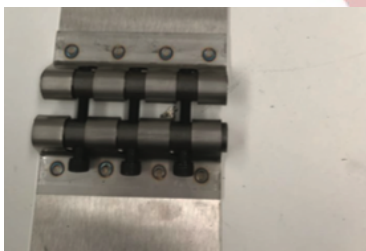

Technical Data & Properties	
Type of Steel	Stainless Steel
Thickness of Steel	0.5 mm (0.02 in)
Connecting bolts	3 pcs of M4 bolt, allen key (hexagonal) 5 mm
Max Torque Force	TBD
Pipe Diameters	Any
Light Weight	Yes
Suitable for Repair at Any Temperature	Yes
Low Profile	Yes
Short clamp preparation and installation Time	Yes

Additional Information

Clamp should be installed only by trained operator. Ask Your supplier for the Carbon Clamp installation manual.

ATTENTION: Leak sealing requires skills and experience. Limits are often being imposed by circumstances related to a particular repair.