


Green pin turnbuckles

- Material : drop forged high tensile steel SAE 1035 or 1045
- Safety factor : MBL equals 5 x WLL
- Standard : generally to ASTM F1145-92 formerly U.S. Federal Specification FF-T-791b
- Finish : hot dipped galvanized
- Certification : a works certificate or proof load test certificate can be supplied upon request

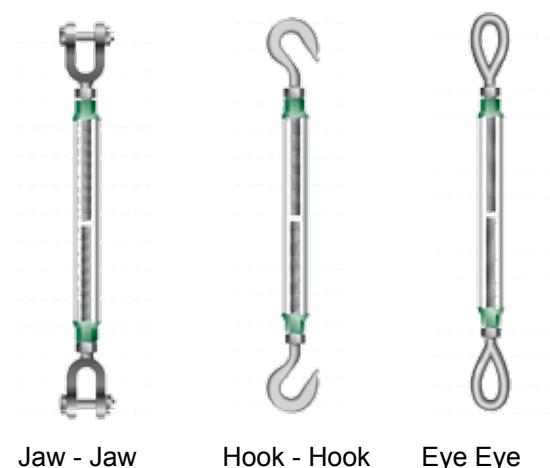

Jaw - Jaw

Hook - Hook

Eye Eye

Stock no.	WLL t	Diameter thread in	Take up in	Weight kg
TB1006GP	0.54	3/8	6	0,57
TB1306GP	1	1/2	6	0,96
TB1309GP	1	1/2	9	1,18
TB1312GP	1	1/2	12	1,50
TB1606GP	1.59	5/8	6	1,84
TB1609GP	1.59	5/8	9	2,12
TB1612GP	1.59	5/8	12	2,56
TB1906GP	2.36	3/4	6	2,68
TB1909GP	2.36	3/4	9	3,03
TB1912GP	2.36	3/4	12	3,29
TB1918GP	2.36	3/4	18	3,65
TB2212GP	3.27	7/8	12	4,90
TB2218GP	3.27	7/8	18	5,95
TB2606GP	4.54	1	6	5,21
TB2612GP	4.54	1	12	6,96
TB2618GP	4.54	1	18	8,95
TB2624GP	4.54	1	24	7,85
TB3212GP	6.9	1	12	11,9
TB3218GP	6.9	1	18	14,0
TB3224GP	6.9	1	24	13,0
TB3812GP	9.71	1	12	16,9
TB3818GP	9.71	1	18	18,7
TB3824GP	9.71	1	24	18,4
TB4418GP	12.7	1	18	25,0
TB4424GP	12.7	1	24	28,7
TB5224GP	16.78	2	24	45,4
TB6424GP	27.22	2	24	73,0
TB7024GP	34.02	2	24	98,0

Safety Factor: 5

MAX FODGAARD A/S

Zealand: Sydholmen 10, 2650 Hvidovre. Tel.: +45 70 26 17 00. Fax: +45 70 26 31 10. Mail: max@fodgaard.dk. www.fodgaard.dk

Jutland: Niels Bohrs Vej 33, Stilling, 8660 Skanderborg. Tel.: +45 86 52 15 77. Fax: +45 86 52 17 37. Mail: max@fodgaard-skb.dk. www.fodgaard.dk

Funen: Kystvejen 100, Lindø Industripark, 5330 Munkebo. Tel.: +45 76 20 15 03. Fax: +45 76 20 15 01. Mail: max@fodgaard.dk. www.fodgaard.dk