



# KRONOS PRO

the spiral mixer




# KRONOS PRO SHORTFACTS

**KRONOS PRO IS A ROBUST AND RELIABLE MIXER WITH WHEEL-OUT BOWLS, WHICH CAN BE EASILY ADJUSTED TO THE INDIVIDUAL NEEDS OF THE CUSTOMER THROUGH DIFFERENT AVAILABLE OPTIONS - EITHER AS A STAND-ALONE-MIXER OR IN A MIXING SYSTEM.**

Optimal processing of small batches

Constant rotating speed of the bowl

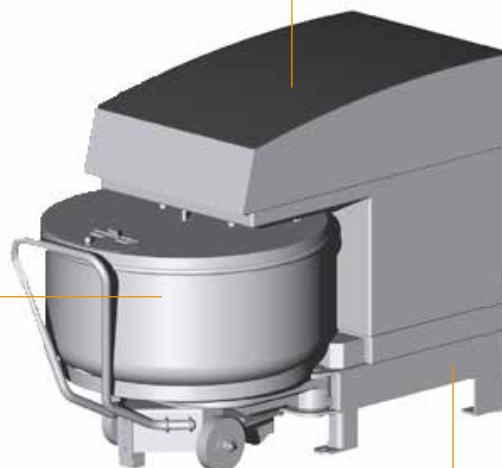

Easy cleaning due to large ground clearance and a smooth surface

## BENEFIT

- Quick, intensive mixing of the ingredients and optimal, reproducible mixing results by Kemper's own 3-Zone-Mixing Principle
- High level of serviceability through the modular design of the Kronos
- Compatible with WP Kemper President and Titan bowls
- Flexible applicable due to different, adapted to the application, mixing tools

Products	Capacity
■ Wheat dough	■ 5 different sizes 120, 160, 200, 240, 400
■ Mixed wheat dough	■ 120 - 400 kg (265 - 880 lb) dough / batch
■ Mixed rye dough	■ 75 - 250 kg (165 - 550 lb) flour / batch
■ Rye dough	■ Up to 630 liter (143 US.dry.gal.) bowl volume

## OPTIONS

- Electronic time switches, control panel with membrane keypad, Touch Panel „monochrome“ with program control or Touch Panel with Multi-Phase-Control
- Temperature sensor PT 100 (incl. with Touch Panel)
- Connection to a superordinate control system
- Pretzel package for the production of stiff wheat doughs (absorption rate < 54 %) for example pretzel- or bagel doughs
- Rye package for the production of mixed rye or rye doughs (> 60 % rye) incl. bowl scraper
- Various special mixing tools
- Bowl scraper
- Stainless steel version

## TECHNICAL SPECIFICATION

		120	160	200	240	400
Drive power	(kw)	3,2/9 (4.3/12 hp)	12/20 (16/26.8 hp)	12/20 (16/26.8 hp)	12/20 (16/26.8 hp)	22/35 (29.5/47 hp)
Fusing	(A)	400 V / 32 Amp	400 V / 50 Amp	400 V / 50 Amp	400 V / 50 Amp	400 V / 80 Amp
Bowl Ø	(mm)	760 (30")	900 (35")	900 (35")	990 (39")	1,220 (48")
Ground clearance	(mm)	135 (5")	135 (5")	135 (5")	135 (5")	135 (5")

**WP Kemper GmbH | Lange Straße 8-10 | D-33397 Rietberg | Germany | Phone +49 5244 402-0  
Fax +49 5244 402-4220 | info@wp-kemper.de | www.wp-kemper.de**