


Datasheet

Type: NS30 (1200mm)
Itemnr.: 1429300041

Product description

NS30 is an LED lightning unit which can be used underneath the top cupboard in the kitchen. The lightning unit has a nice and streamlined design and the fitting ensures a nice, warm light with a broad diffusion of light, great light quality and easy handling of glare as the LEDs can be pushed back in the lightning unit. This ensures a successful installation in the kitchen and the great light quality guarantees that foods appear as realistic as possible. Extensive market research prior to the production of NS30 has resulted in a product which can match all demands regarding quality of light, functionality and design. The product can be easily installed and put together using a connector which shut tight between the two lightning units. As the driver is build-in, the electrician can install the product easily and it is also legal for the end-user to install NS30. NS30 are available in 4 lengths: 300mm, 600mm, 900mm and 1200mm. The product has a three-year guarantee and is delivered as standard in aluminum but can be delivered in other colors on request.

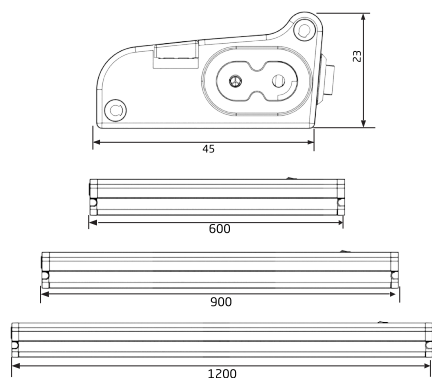

Normasym Intl.
Phone +4571995825
hello@normasym.com
www.normasym.com

Technical Data

Lumen	1800lm
Beam Angle	120
Colors Available	Warm white or Neutral white
Color Temperature	Warm white 3000K or Neutral white: 4000K
Color Rendering	CRI90+
MacAdam	Step 3
Color Bin	V6
Consumption	20W
Voltage Range	220 ~ 240VAC 50/60Hz
Efficiency	90 LPW
Equal To	NS30 20W = Fluorescent tube T8 36W
Lifetime LEDs	35K hours at Ta = 25°C (L70) B10
Lifetime driver	50K hours at Ta = 25°C (MTBF) B10
IP Code	IP20
Class	2, Double Insulated
Size	L1200 x W45 x H25 mm
Installation	Directly under cabinet
Weight	0,62 Kg
IES File	Yes
Warranty	3 years*
Housing	White or optional

Shipping

The products are to be delivered in package of 1 pc.

Energy savings up to 90%

Incandescent-lamp 100W ➡ NS30 20W
Fluorecent tube T8 36W ➡ NS30 20W